




RP

LIGHTING • FANS

Type:
Project:
Comments:
Prepared By:

<b>Part #</b>	<b>8194HA-E26</b>
Category #:	8194
Product Category:	Recessed Fluorescent
Description:	4" IC rated Airtight Compact fluorescent housing
<b>Design Features</b>	
Thermal Protection	Protected against misuse of insulation and improper wiring
IC Rating	IC rated for direct contact w/ non cellulose type insulation
J Box	Listed for feed through wiring (4 in-4 out) and five ½" knockouts and four non metallic cable knockouts w/ strain clamps
Bar hangers	Pre installed allowing for position at any point w/in a 24" joist span. Can be turned 90° on plaster frame, & to fit T-bar spine w/out additional clamps for use in drop ceilings.
Nails	Pre installed captive nails on bar hangers
Wattage	1x26W
Lamp	G24/GX24 socket
Voltage	120V-60Hz
<b>Warranty</b>	<b>1 year limited warranty</b>
<b>Listing</b>	
ETL/UL	cULus for damp location
Meets Washington's State energy code for restricted airflow	

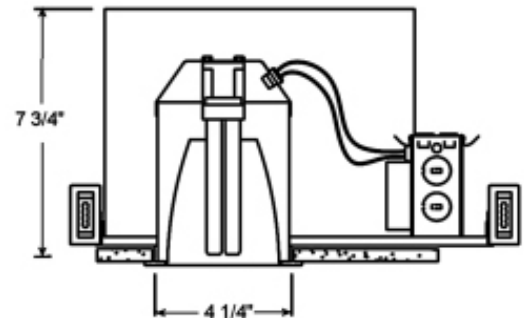

# Trim Options



	Type	Item#	Finishes	O.D.
	Baffle	8701	Black, white, oil rubbed bronze Optional BA, BK rings.	5"
	Shower Trim, Fresnel	8702FS	Wet location listed.	5"
	Reflector	8703	White, Clear, Brushed aluminum Optional BA, BK rings	5"
	Satin Glass	8704	Wet location listed White	5"
	Shower, Albalite	8705AL	Wet location listed	5"
	Eyeball	8706	Brushed Aluminum, black, white	5"
	Wall Wash	8707WW	White	5"
	Satin Bubble Glass	8710	Wet location listed White	5"
	Pin Hole	8721PN	White	5"
	Gimbal	8740	Black, white, brushed aluminum	5"

## Additional Information

1. Adjusts to fit up to 1" ceiling thickness.
2. 7-3/4" height allows use in 2" x 8" joist construction.

CONTACT US- Toll Free: 1-800-937-6925 Fax: 1-888-207-9509 or visit our website at [www.rplighting.com](http://www.rplighting.com)