


RXEL37 Series

120V/277V

Catalog #:		Type
Project:		Date
Prepared by:		

Standard Exit/Emergency Combo

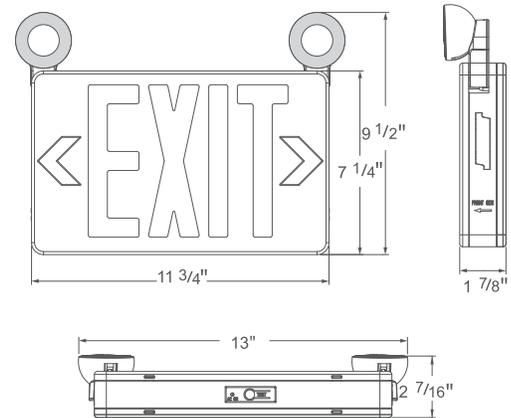

LED Emergency Exit

DESCRIPTION

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 24 hours.

DESIGN FEATURES

Construction

- Includes single or double faceplate - includes one blank face. Universal snap-in & out chevrons meets all state and local UL924 codes
- Thermoplastic housing w/ flame retardant housing
- Compact, low profile design
- Complete self-contained. Integral recharging system

Electrical

- 120/277V AC input, 60Hz
- Operating temp. 10°C (50°F) to 40°C (104°F)
- Light source: 2x1W LED, 6000K, 150lms
- Battery: Ni-cd battery, 1pcs of 3.6V 900mAh
- Protected from deep discharge. Whenever regular AC fails, the internal solid state transfer switch automatically connects internal battery to run for 90 minutes. Battery life expectancy is 10 years
- Manual test switch and LED indicator

Installation

- Universal mounting (wall, side and ceiling)
- Easy, one-person installation

Dimensions (W x D X H)

- 11-3/4" x 1-7/8" x 9-1/2"

Finish

- GW= Green with white housing

Certifications

- UL listed to UL924 Standards for damp location
- LED Light Source: 5 year limited warranty
- Other Components: 1 year limited warranty

ORDERING

Example: RXEL37-GW

Model #	Finish
RXEL37	
RXEL37	GW : Green with white housing

