


# RXEL38 Series

120V/277V

Catalog #:		Type
Project:		Date
Prepared by:		

## High Output Exit/Emergency Combo

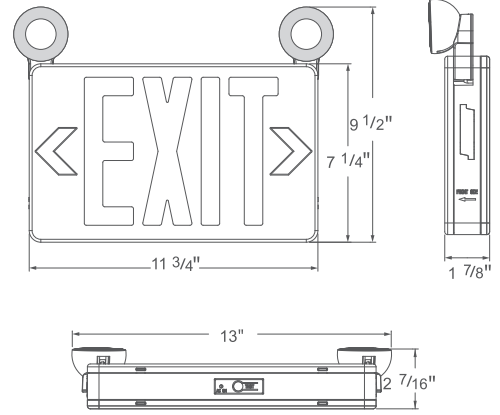

### DESCRIPTION

The RXEL38 Series LED Emergency Exit Sign features two adjustable heads, single or double face high impact thermoplastic faceplates with snap-in & out chevrons. This exit sign uses LED light bulbs and has a backup battery. Ideal for applications requiring attractive, quick-installation exit signs and low energy consumption.

### DESIGN FEATURES

#### Construction

- Flame retardant thermoplastic housing
- Single or double face thermoplastic faceplates included
- Wall, Ceiling or End Universal Mounting

#### Electrical

- 120V / 277V AC
- Operating Temp: 10°C (50°F) to 40°C (104°F)
- 2 x 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 2W LED | 6000K | 250 lms total
- Manual test switch and LED indicator
- Minimum 90 minutes illumination due to power failure

#### Dimensions

- 11-3/4" W x 2-7/16" D x 9-1/2" H

#### Certifications

- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

### ORDERING GUIDE

Example: RXEL38RW

Model #	Lettering / Housing
RXEL38	
RXEL38	RW : Red with white housing GW : Green with white housing



TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

3/2/22 R1



RP LIGHTING • FANS