


4782EM

120V-277V Universal Voltage

Catalog #:		Type
Project:		Date
Prepared by:		

Multi-Functional Emergency Battery

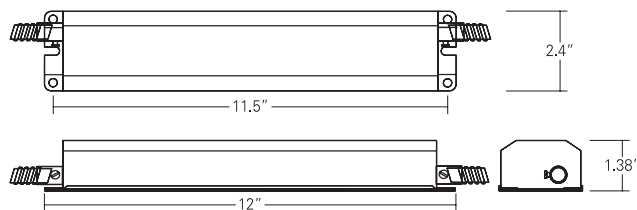

DESCRIPTION

A Multi-Functional Emergency Driver for factory or field installation which allows the luminaire to be used for normal and emergency operation. Works in conjunction with most of light source for a multi-functional application. Durable heavy duty steel housing and maintenance-free rechargeable Li-ion battery with a function for self-diagnosis per one month and 12 months.

DESIGN FEATURES

Construction

- Durable heavy duty steel housing

Electrical

- 120V-277V Universal Voltage
- Operates 120V LED (120V) or DC LED (with driver) fixtures for 90 minutes when normal power fails and, gives 700lms in power outage
- AC Input Power Rating 3.5W, Output Power 9W(±10%)
- Output Voltage: 30 - 130V
- Operating Temp 0°C to +55°C (32° F to 131° F)
- Battery: Li-ion Battery | 11.1 V / 2.6Ah
- Recharge Time: 24 Hours
- Self-Diagnosis: Smart Charger Technology for self-diagnosis per 1 &12 months.
- Test Switch / Charging Indicator Light: 4 W - ITS (4-Wire illuminated test switch)*
- Maximum wiring distance between the fixture and EM is 55"

Certifications


- cULus: Listed to UL924 and tested to CSA 22.2, No. 141 Field or factory installation (Indoor/Damp)
- Limited 5 Year Warranty

ORDERING

Example: 4782EM

Model #	
4782EM	

INSTALLATION OPTION

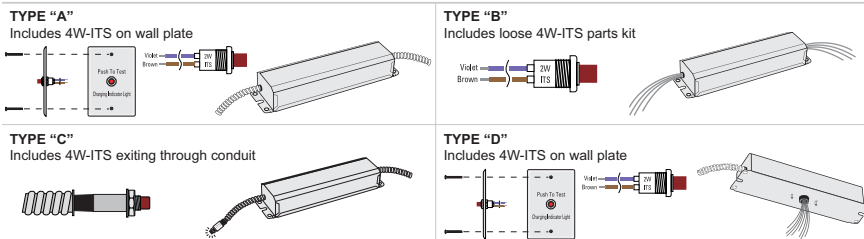

*4W-ITS exits through conduit adaptor. All other wire through the other conduit.



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

