


4731EM | 4781EM

120V-277V Universal Voltage

Catalog #:		Type
Project:		Date
Prepared by:		

LED Emergency Backup Battery

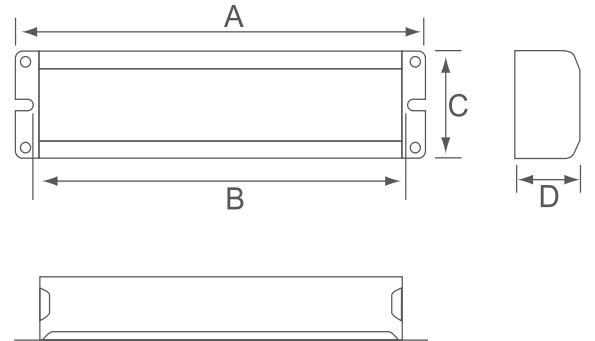

DESCRIPTION

A Multi-Functional Emergency Driver for factory or field installation which allows the luminaire to be used for normal and emergency operation. Works in conjunction with most of light source including LED, Florescent, incandescent etc for multi-functional application. Durable heavy duty steel housing and maintenance-free rechargeable Li-ion battery.

DESIGN FEATURES

Construction

- Durable heavy duty steel housing

Electrical

- 120V-277V Universal Voltage
- LED emergency driver operates with LED fixtures normal A/C driver and provides emergency lighting when normal power fails
- Rechargeable Ni-Cad battery, maintenance-free
- Provides emergency lighting for 90 minutes
- LED indicator light and remote push button test switch included.
- Included standard single gang mounting box
- Suitable for indoor use and damp location
- 4731EM: 5 Watts max. output power
- 4731EM: Output voltage ranges from 3-30V DC
- 4781EM: 8 Watts max. output power
- 4781EM: Output voltage ranges from 30-80V DC

Dimensions

- 4731EM: A: 9-1/2" x B: 8-5/8" x C: 2-1/2" x D: 1-1/2"
- 4781EM: A: 11-1/16" x B: 10" x C: 2-1/2" x D: 1-1/2"

Certifications

- cRUus Certified
- 5 year limited warranty

ORDERING

Example: 4731EM

Model #	
4731EM/4781EM	
4731EM	: 4731EM
4781EM	: 4781EM



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.