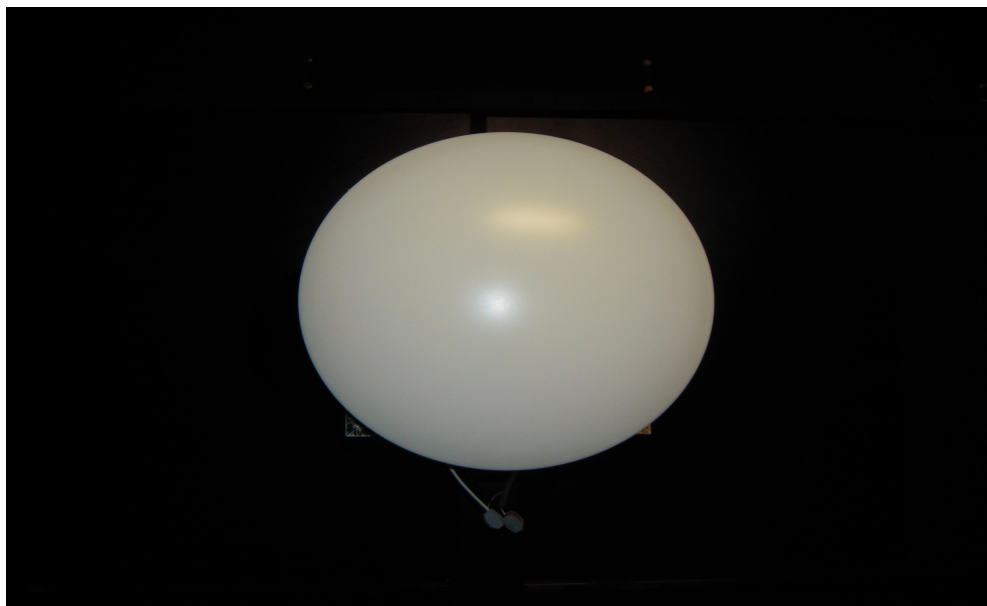


**Report No.:**

Luminaire Type	4336-15		
Lamp Type	LED		
Client		EUT NO.	
<b>Luminaire Parameters:</b>			
Voltage	120.3	Current	0.125
Power:	15.0	Power Factor	0.999
Frequency:	60Hz	Tc	2723K
<b>Photometric Parameters</b>			
Luminaire Flux	1013.82 lm	Luminaire Eff.	Data imperfect...!
Max Intensity	273.777cd	Central Intensity	273.777cd
Angle of Max Intensity:	C:0 G:0		
Upward Flux Ratio	-12476.29%		
Downward Flux Ratio	-88905.59%		
50%Imax Beam Width	C0:118Deg C90: 118.08Deg		
Remark			

**Luminaire Figure**


# RP Lighting • Fans

## Photometric Data Table [Unit:cd] 4336-15

C\G	-180	-175	-170	-165	-160	-155	-150	-145	-140	-135
0	1.5	2.6	5.9	8.2	10.3	12.2	13.8	15.3	16.5	17.4
5	1.5	2.6	6.0	8.4	10.6	12.7	14.4	15.6	16.6	17.4
10	1.5	2.7	6.2	8.9	11.3	13.6	15.3	16.4	17.1	17.6
15	1.5	2.7	6.5	9.5	12.2	14.6	16.0	16.9	17.5	17.8
20	1.5	2.8	6.8	10.1	13.0	15.1	16.4	17.1	17.7	18.0
25	1.6	2.9	7.0	10.7	13.5	15.4	16.6	17.4	17.9	18.0
30	1.6	2.9	7.3	11.1	13.8	15.6	16.7	17.5	18.0	18.1
35	1.6	3.0	7.5	11.3	14.0	15.7	16.7	17.6	18.0	18.1
40	1.6	3.0	7.7	11.5	14.1	15.8	16.8	17.6	18.0	18.1
45	1.6	3.1	7.6	11.5	14.2	15.8	16.8	17.6	18.1	18.1
50	1.6	3.1	7.4	11.4	14.2	15.8	16.8	17.6	18.0	18.1
55	1.6	3.1	7.2	11.2	14.0	15.7	16.7	17.5	18.0	18.1
60	1.6	3.1	7.0	10.8	13.7	15.6	16.5	17.3	17.9	18.0
65	1.5	3.2	6.7	10.1	13.3	15.3	16.3	17.1	17.7	18.0
70	1.4	3.2	6.4	9.5	12.5	14.8	16.1	16.9	17.4	17.7
75	1.4	3.3	6.2	9.0	11.5	14.0	15.6	16.5	17.1	17.3
80	1.4	3.3	6.0	8.5	10.7	12.9	14.6	15.6	16.3	16.9
85	1.4	3.3	6.0	8.3	10.3	12.0	13.6	14.7	16.0	16.9
90	1.4	3.4	6.2	8.4	10.3	11.9	13.2	14.7	16.4	17.5
95	1.4	3.5	6.5	8.9	10.8	12.5	13.9	15.5	16.8	17.5
100	1.4	3.7	6.9	9.5	11.7	13.4	15.0	16.5	17.4	17.7
105	1.4	3.8	7.3	10.2	12.7	14.2	15.7	17.0	17.7	17.9
110	1.5	4.0	7.7	10.9	13.3	14.5	16.1	17.3	17.9	18.0
115	1.5	4.1	8.1	11.3	13.7	14.8	16.4	17.5	18.0	18.0
120	1.6	4.1	8.5	11.6	13.9	15.0	16.7	17.6	18.0	18.1
125	1.6	4.2	8.7	11.8	14.1	15.2	16.8	17.7	18.1	18.1
130	1.6	4.2	8.8	11.9	14.2	15.3	16.8	17.8	18.1	18.1
135	1.6	4.3	8.7	11.9	14.2	15.3	16.8	17.8	18.1	18.1
140	1.6	4.3	8.6	11.8	14.2	15.3	16.7	17.7	18.2	18.1
145	1.6	4.3	8.4	11.7	14.1	15.3	16.5	17.6	18.1	18.0
150	1.5	4.3	8.1	11.4	14.0	15.2	16.2	17.4	18.0	18.0
155	1.5	4.2	7.8	11.0	13.7	15.1	16.0	17.1	17.7	17.9
160	1.5	4.2	7.5	10.4	13.2	14.9	15.9	16.8	17.3	17.4
165	1.5	4.1	7.1	9.8	12.4	14.4	15.5	16.4	16.9	17.5
170	1.5	4.1	6.9	9.3	11.6	13.6	15.1	16.3	17.1	17.6
175	1.5	4.1	6.7	9.0	11.1	13.0	14.7	16.0	16.8	17.5
180	1.5	4.1	6.7	8.9	10.9	12.7	14.3	15.8	16.7	17.6
185	1.5	4.1	6.7	9.0	11.1	13.0	14.7	15.9	16.8	17.5
190	1.5	4.1	6.9	9.4	11.8	13.8	15.3	16.6	17.2	17.6
195	1.5	4.1	7.2	10.0	12.6	14.8	16.0	17.0	17.4	17.7
200	1.5	4.1	7.5	10.6	13.4	15.3	16.4	17.2	17.7	17.8
205	1.5	4.1	7.8	11.2	13.9	15.6	16.5	17.4	17.8	17.9
210	1.5	4.2	8.1	11.6	14.2	15.7	16.7	17.5	17.9	18.0
215	1.4	4.2	8.4	11.9	14.4	15.8	16.8	17.5	18.0	18.0
220	1.4	4.2	8.6	12.0	14.5	15.8	16.8	17.5	18.0	18.0
225	1.4	4.1	8.7	12.1	14.5	15.9	16.9	17.6	18.0	18.0
230	1.4	4.0	8.7	12.0	14.4	15.8	16.8	17.5	17.9	18.0
235	1.4	4.0	8.6	11.9	14.4	15.8	16.8	17.5	17.9	18.0

# RP Lighting • Fans

## Photometric Data Table [Unit:cd] 4336-15

<b>240</b>	1.4	3.9	8.3	11.7	14.2	15.6	16.7	17.4	17.8	17.9
<b>245</b>	1.4	3.8	7.9	11.4	13.9	15.4	16.5	17.3	17.8	17.9
<b>250</b>	1.4	3.6	7.5	10.8	13.5	15.2	16.3	17.1	17.6	17.8
<b>255</b>	1.3	3.5	7.1	10.1	12.8	14.8	16.0	16.9	17.5	17.7
<b>260</b>	1.3	3.4	6.7	9.4	11.8	14.0	15.6	16.5	17.1	17.5
<b>265</b>	1.3	3.2	6.3	8.7	10.9	12.9	14.6	15.8	16.7	17.3
<b>270</b>	1.3	3.1	6.0	8.2	10.3	12.1	13.8	15.3	16.4	17.3
<b>275</b>	1.4	3.1	5.9	8.1	10.2	12.2	13.9	15.3	16.4	17.2
<b>280</b>	1.4	3.0	5.9	8.4	10.6	12.9	14.7	16.0	16.9	17.3
<b>285</b>	1.4	2.9	6.1	8.9	11.4	13.9	15.7	16.7	17.3	17.6
<b>290</b>	1.4	2.9	6.3	9.4	12.4	14.8	16.1	17.0	17.6	17.8
<b>295</b>	1.4	2.9	6.5	10.0	13.1	15.2	16.4	17.2	17.8	17.9
<b>300</b>	1.4	2.8	6.8	10.6	13.6	15.5	16.6	17.4	17.9	18.0
<b>305</b>	1.4	2.8	7.0	11.0	13.9	15.6	16.7	17.5	17.9	18.0
<b>310</b>	1.5	2.8	7.2	11.2	14.0	15.7	16.7	17.5	18.0	18.1
<b>315</b>	1.5	2.8	7.3	11.3	14.1	15.7	16.8	17.6	18.0	18.1
<b>320</b>	1.5	2.8	7.3	11.3	14.1	15.7	16.8	17.6	18.0	18.1
<b>325</b>	1.5	2.7	7.2	11.1	13.9	15.6	16.7	17.5	18.0	18.1
<b>330</b>	1.5	2.7	6.9	10.9	13.7	15.6	16.6	17.4	17.9	18.1
<b>335</b>	1.4	2.6	6.7	10.4	13.3	15.3	16.5	17.2	17.8	18.0
<b>340</b>	1.5	2.6	6.4	9.7	12.7	15.0	16.2	17.1	17.6	18.0
<b>345</b>	1.5	2.6	6.1	9.2	11.8	14.4	15.9	16.8	17.5	17.8
<b>350</b>	1.4	2.6	5.9	8.6	11.0	13.4	15.1	16.3	17.1	17.6
<b>355</b>	1.5	2.6	5.8	8.2	10.4	12.5	14.2	15.6	16.6	17.4
<b>360</b>	1.5	2.6	5.9	8.2	10.3	12.2	13.8	15.3	16.5	17.4
<b>C\G</b>	<b>-130</b>	<b>-125</b>	<b>-120</b>	<b>-115</b>	<b>-110</b>	<b>-105</b>	<b>-100</b>	<b>-95</b>	<b>-90</b>	<b>-85</b>
<b>0</b>	17.6	17.1	16.6	16.8	17.8	20.2	24.3	30.5	38.8	49.5
<b>5</b>	17.6	17.1	16.6	16.8	17.8	20.2	24.3	30.5	38.8	49.5
<b>10</b>	17.5	17.1	16.6	16.8	17.8	20.2	24.3	30.4	38.8	49.4
<b>15</b>	17.6	17.1	16.7	16.7	17.8	20.2	24.3	30.4	38.7	49.4
<b>20</b>	17.6	17.1	16.7	16.8	17.8	20.2	24.2	30.3	38.7	49.4
<b>25</b>	17.7	17.1	16.6	16.8	17.8	20.1	24.2	30.3	38.7	49.5
<b>30</b>	17.7	17.1	16.7	16.8	17.8	20.1	24.2	30.3	38.7	49.5
<b>35</b>	17.7	17.1	16.7	16.8	17.8	20.1	24.3	30.3	38.8	49.6
<b>40</b>	17.7	17.1	16.6	16.8	17.8	20.1	24.3	30.4	38.8	49.6
<b>45</b>	17.7	17.1	16.7	16.8	17.8	20.2	24.3	30.5	38.9	49.8
<b>50</b>	17.7	17.1	16.6	16.8	17.8	20.2	24.3	30.5	39.0	49.9
<b>55</b>	17.7	17.1	16.6	16.7	17.8	20.2	24.4	30.6	39.2	50.1
<b>60</b>	17.7	17.1	16.7	16.8	17.8	20.3	24.5	30.7	39.3	50.2
<b>65</b>	17.7	17.1	16.7	16.8	17.9	20.3	24.5	30.8	39.4	50.5
<b>70</b>	17.6	17.1	16.7	16.8	17.9	20.4	24.6	30.9	39.6	50.6
<b>75</b>	17.4	17.1	16.7	16.8	17.9	20.4	24.7	31.1	39.7	50.8
<b>80</b>	17.0	17.0	16.7	16.8	18.0	20.5	24.8	31.2	40.0	51.1
<b>85</b>	17.2	16.9	16.7	16.8	18.0	20.6	24.9	31.4	40.1	51.3
<b>90</b>	17.6	16.9	16.7	16.8	18.0	20.6	25.0	31.5	40.4	51.6
<b>95</b>	17.6	17.1	16.6	16.9	18.0	20.7	25.2	31.7	40.5	51.7
<b>100</b>	17.6	17.0	16.6	16.9	18.1	20.8	25.2	31.8	40.8	52.0

## RP Lighting • Fans

### Photometric Data Table [Unit:cd] 4336-15

105	17.6	17.0	16.6	16.9	18.1	20.9	25.4	32.0	40.9	52.2
110	17.6	17.0	16.6	16.9	18.2	20.9	25.5	32.2	41.1	52.4
115	17.6	17.0	16.6	16.9	18.2	21.0	25.6	32.3	41.3	52.6
120	17.6	17.0	16.6	16.9	18.2	21.1	25.7	32.4	41.5	52.7
125	17.6	17.0	16.6	16.9	18.3	21.1	25.8	32.6	41.6	52.9
130	17.6	16.9	16.6	16.9	18.3	21.2	25.9	32.7	41.8	53.1
135	17.6	17.0	16.6	17.0	18.4	21.3	26.0	32.8	41.9	53.2
140	17.6	16.9	16.6	17.0	18.4	21.3	26.1	32.9	41.9	53.3
145	17.6	17.0	16.6	17.0	18.4	21.3	26.1	33.0	42.0	53.3
150	17.6	17.0	16.6	17.0	18.4	21.4	26.1	33.0	42.0	53.4
155	17.3	16.9	16.7	17.0	18.5	21.4	26.2	33.0	42.0	53.3
160	17.2	17.0	16.7	17.0	18.4	21.4	26.1	32.9	42.0	53.2
165	17.4	17.0	16.7	17.0	18.4	21.3	26.0	32.9	41.8	53.1
170	17.5	17.0	16.7	17.0	18.4	21.3	26.0	32.7	41.7	52.9
175	17.5	17.0	16.7	17.0	18.3	21.2	25.8	32.6	41.5	52.7
180	17.5	17.0	16.6	16.9	18.3	21.1	25.7	32.4	41.3	52.5
185	17.5	17.0	16.6	16.9	18.2	21.0	25.5	32.1	41.0	52.1
190	17.5	17.0	16.6	16.8	18.1	20.8	25.3	31.9	40.7	51.8
195	17.4	16.9	16.5	16.8	18.0	20.7	25.1	31.6	40.4	51.4
200	17.5	16.9	16.5	16.7	17.9	20.5	24.9	31.4	40.1	51.0
205	17.5	16.9	16.5	16.6	17.8	20.4	24.7	31.1	39.8	50.7
210	17.5	16.9	16.5	16.6	17.7	20.2	24.5	30.8	39.4	50.3
215	17.5	16.8	16.4	16.5	17.6	20.1	24.3	30.5	39.1	50.0
220	17.5	16.8	16.4	16.5	17.5	20.0	24.1	30.3	38.7	49.6
225	17.5	16.8	16.3	16.4	17.5	19.9	23.9	30.1	38.5	49.3
230	17.5	16.8	16.3	16.4	17.4	19.7	23.8	29.9	38.3	49.0
235	17.5	16.8	16.3	16.4	17.4	19.7	23.7	29.8	38.1	48.9
240	17.5	16.8	16.3	16.4	17.3	19.6	23.6	29.6	38.0	48.7
245	17.5	16.8	16.3	16.4	17.3	19.6	23.6	29.6	37.9	48.6
250	17.5	16.8	16.3	16.4	17.3	19.6	23.5	29.5	37.8	48.5
255	17.4	16.8	16.3	16.4	17.3	19.6	23.6	29.6	37.8	48.5
260	17.4	16.9	16.3	16.4	17.4	19.6	23.6	29.6	37.9	48.5
265	17.4	16.9	16.4	16.4	17.4	19.7	23.7	29.7	37.9	48.6
270	17.5	16.9	16.4	16.5	17.4	19.7	23.7	29.7	38.0	48.7
275	17.5	16.9	16.4	16.5	17.5	19.8	23.8	29.8	38.1	48.8
280	17.4	17.0	16.5	16.6	17.5	19.8	23.9	29.9	38.2	48.9
285	17.5	17.0	16.5	16.6	17.6	19.9	24.0	30.0	38.3	49.0
290	17.6	17.0	16.5	16.6	17.6	20.0	24.0	30.1	38.5	49.1
295	17.6	17.0	16.6	16.7	17.7	20.1	24.1	30.2	38.6	49.3
300	17.7	17.0	16.6	16.7	17.7	20.1	24.2	30.4	38.7	49.3
305	17.7	17.1	16.6	16.7	17.8	20.2	24.3	30.4	38.8	49.5
310	17.7	17.1	16.6	16.8	17.8	20.2	24.4	30.5	38.9	49.5
315	17.7	17.1	16.7	16.8	17.8	20.2	24.4	30.6	39.0	49.6
320	17.7	17.1	16.7	16.8	17.8	20.3	24.5	30.6	39.0	49.6
325	17.7	17.1	16.7	16.8	17.9	20.3	24.5	30.7	39.0	49.7
330	17.7	17.1	16.7	16.8	17.9	20.3	24.5	30.6	39.0	49.7
335	17.7	17.1	16.7	16.8	17.8	20.3	24.5	30.7	39.0	49.6
340	17.7	17.1	16.7	16.8	17.8	20.3	24.5	30.6	39.0	49.6
345	17.6	17.1	16.7	16.8	17.8	20.3	24.4	30.6	38.9	49.5

# RP Lighting • Fans

## Photometric Data Table [Unit:cd] 4336-15

<b>350</b>	17.5	17.1	16.7	16.7	17.8	20.2	24.4	30.6	38.9	49.6
<b>355</b>	17.6	17.1	16.7	16.8	17.8	20.2	24.4	30.5	38.9	49.4
<b>360</b>	17.6	17.1	16.6	16.8	17.8	20.2	24.3	30.5	38.8	49.5
<b>C\G</b>	<b>-80</b>	<b>-75</b>	<b>-70</b>	<b>-65</b>	<b>-60</b>	<b>-55</b>	<b>-50</b>	<b>-45</b>	<b>-40</b>	<b>-35</b>
<b>0</b>	62.3	77.1	93.9	111.9	130.7	150.0	168.8	187.1	204.1	219.8
<b>5</b>	62.2	77.2	93.8	111.8	130.7	149.8	169.0	187.0	204.1	219.6
<b>10</b>	62.2	77.1	93.9	112.0	130.7	150.0	168.9	187.3	204.3	219.9
<b>15</b>	62.3	77.2	93.9	111.9	130.9	150.1	169.1	187.2	204.3	219.9
<b>20</b>	62.2	77.2	94.1	112.1	130.9	150.1	169.2	187.4	204.3	219.9
<b>25</b>	62.4	77.3	94.1	112.2	131.2	150.4	169.4	187.5	204.7	220.2
<b>30</b>	62.4	77.5	94.3	112.4	131.2	150.4	169.5	187.6	204.8	220.1
<b>35</b>	62.5	77.5	94.4	112.6	131.5	150.8	169.8	188.0	204.9	220.5
<b>40</b>	62.6	77.8	94.7	112.8	131.8	151.0	169.9	188.1	205.0	220.5
<b>45</b>	62.8	77.9	94.9	113.2	132.0	151.3	170.3	188.4	205.4	220.9
<b>50</b>	63.0	78.2	95.2	113.3	132.5	151.6	170.6	188.7	205.6	221.0
<b>55</b>	63.2	78.4	95.5	113.7	132.7	151.8	170.8	188.9	205.7	221.2
<b>60</b>	63.5	78.7	95.8	114.0	133.0	152.3	171.3	189.4	206.2	221.6
<b>65</b>	63.6	79.1	96.1	114.4	133.5	152.5	171.4	189.5	206.3	221.6
<b>70</b>	64.0	79.3	96.4	114.7	133.6	153.0	171.9	190.0	206.8	222.1
<b>75</b>	64.2	79.6	96.8	115.0	134.2	153.2	172.2	190.2	206.9	222.2
<b>80</b>	64.4	79.9	97.0	115.4	134.4	153.6	172.5	190.5	207.3	222.5
<b>85</b>	64.7	80.2	97.4	115.6	134.7	153.9	172.9	190.9	207.6	222.7
<b>90</b>	64.9	80.4	97.6	116.0	135.1	154.2	173.0	191.0	207.7	222.9
<b>95</b>	65.2	80.7	97.8	116.2	135.2	154.5	173.4	191.4	208.1	223.2
<b>100</b>	65.4	80.9	98.1	116.4	135.5	154.7	173.4	191.4	208.0	223.1
<b>105</b>	65.7	81.2	98.2	116.7	135.7	154.8	173.7	191.7	208.4	223.3
<b>110</b>	65.8	81.3	98.5	116.7	135.8	155.0	173.8	191.7	208.3	223.5
<b>115</b>	66.1	81.5	98.6	116.9	136.0	155.2	173.9	191.9	208.5	223.6
<b>120</b>	66.2	81.7	98.8	117.1	136.1	155.2	174.1	191.9	208.6	223.5
<b>125</b>	66.4	81.8	99.0	117.2	136.3	155.4	174.1	192.2	208.6	223.8
<b>130</b>	66.5	82.0	99.0	117.3	136.4	155.3	174.3	192.0	208.6	223.6
<b>135</b>	66.7	82.0	99.2	117.5	136.3	155.5	174.2	192.2	208.8	223.8
<b>140</b>	66.7	82.2	99.1	117.4	136.3	155.4	174.3	192.1	208.6	223.6
<b>145</b>	66.8	82.2	99.3	117.5	136.3	155.4	174.1	192.0	208.6	223.7
<b>150</b>	66.8	82.2	99.1	117.3	136.3	155.4	174.2	192.1	208.6	223.6
<b>155</b>	66.7	82.1	99.1	117.3	136.3	155.2	173.9	191.8	208.3	223.4
<b>160</b>	66.7	81.9	99.0	117.1	136.1	155.2	173.9	191.8	208.4	223.5
<b>165</b>	66.5	81.9	98.9	116.9	135.8	154.8	173.5	191.4	208.0	223.1
<b>170</b>	66.3	81.5	98.5	116.8	135.6	154.7	173.4	191.3	208.0	223.1
<b>175</b>	66.0	81.4	98.4	116.4	135.4	154.3	173.1	191.0	207.6	222.8
<b>180</b>	65.7	81.0	98.0	116.2	135.0	154.1	172.8	190.7	207.4	222.6
<b>185</b>	65.4	80.7	97.6	115.7	134.7	153.8	172.6	190.5	207.2	222.4
<b>190</b>	65.0	80.3	97.3	115.4	134.3	153.3	172.1	190.0	206.8	222.0
<b>195</b>	64.7	79.9	96.8	115.0	133.9	153.1	171.9	189.9	206.7	222.0
<b>200</b>	64.3	79.5	96.5	114.6	133.6	152.5	171.4	189.4	206.2	221.5
<b>205</b>	63.9	79.0	95.9	114.3	133.1	152.3	171.2	189.2	206.1	221.4
<b>210</b>	63.5	78.7	95.6	113.8	132.9	151.9	170.9	188.9	205.7	221.1

# RP Lighting • Fans

## Photometric Data Table [Unit:cd] 4336-15

215	63.0	78.2	95.2	113.5	132.3	151.5	170.4	188.6	205.5	220.8
220	62.7	77.9	94.9	113.0	132.0	151.3	170.3	188.4	205.3	220.8
225	62.3	77.5	94.5	112.7	131.7	150.9	169.9	188.0	204.9	220.3
230	62.1	77.3	94.1	112.4	131.4	150.6	169.8	188.0	204.8	220.4
235	61.8	76.9	94.0	112.2	131.3	150.5	169.5	187.7	204.7	220.1
240	61.7	76.8	93.7	111.9	131.0	150.3	169.3	187.6	204.6	220.1
245	61.5	76.6	93.7	111.9	130.9	150.2	169.3	187.3	204.3	219.8
250	61.5	76.5	93.5	111.7	130.8	150.1	169.0	187.5	204.4	220.0
255	61.4	76.5	93.4	111.7	130.7	149.9	169.2	187.2	204.3	219.7
260	61.5	76.5	93.4	111.6	130.7	150.1	169.0	187.3	204.2	219.9
265	61.5	76.6	93.4	111.6	130.6	149.9	169.1	187.3	204.3	219.7
270	61.6	76.6	93.5	111.7	130.6	150.0	169.0	187.2	204.1	219.8
275	61.7	76.7	93.4	111.6	130.7	149.9	169.1	187.3	204.3	219.8
280	61.7	76.7	93.6	111.7	130.6	149.9	168.8	187.1	204.1	219.6
285	61.9	76.8	93.6	111.6	130.6	149.9	169.0	187.2	204.0	219.7
290	62.0	76.9	93.7	111.7	130.6	149.7	168.8	187.0	204.1	219.4
295	62.1	76.9	93.6	111.7	130.5	149.9	168.8	186.9	204.1	219.6
300	62.2	77.1	93.8	111.7	130.6	149.7	168.8	187.0	203.9	219.4
305	62.3	77.1	93.7	111.8	130.5	149.8	168.7	186.8	203.8	219.5
310	62.3	77.2	93.8	111.7	130.6	149.7	168.7	187.0	204.0	219.5
315	62.4	77.2	93.8	111.8	130.5	149.6	168.5	186.8	203.9	219.3
320	62.5	77.2	93.8	111.7	130.5	149.7	168.7	186.9	203.8	219.5
325	62.4	77.2	93.8	111.8	130.6	149.6	168.5	186.8	204.0	219.3
330	62.5	77.2	93.8	111.7	130.4	149.7	168.6	186.7	203.8	219.5
335	62.4	77.2	93.8	111.7	130.6	149.5	168.6	186.8	203.7	219.3
340	62.4	77.1	93.7	111.7	130.4	149.7	168.5	186.6	203.9	219.4
345	62.3	77.1	93.8	111.6	130.5	149.6	168.6	186.8	203.7	219.4
350	62.3	77.0	93.7	111.7	130.4	149.6	168.5	186.7	203.9	219.3
355	62.3	77.1	93.7	111.6	130.4	149.6	168.7	186.8	203.9	219.6
360	62.3	77.1	93.9	111.9	130.7	150.0	168.8	187.1	204.1	219.8
<b>C\G</b>	<b>-30</b>	<b>-25</b>	<b>-20</b>	<b>-15</b>	<b>-10</b>	<b>-5</b>	<b>0</b>	<b>5</b>	<b>10</b>	<b>15</b>
<b>0</b>	233.5	245.4	255.7	263.5	269.1	272.7	273.8	273.3	270.3	265.1
<b>5</b>	233.8	245.7	255.5	263.4	269.4	272.6	273.8	273.3	270.3	264.9
<b>10</b>	233.7	245.6	255.7	263.7	269.5	272.7	273.8	273.3	270.0	264.8
<b>15</b>	233.8	245.8	255.8	263.6	269.3	272.7	273.8	273.4	270.2	264.7
<b>20</b>	233.9	245.7	255.7	263.8	269.4	272.8	273.8	273.4	270.2	264.6
<b>25</b>	233.9	246.0	255.8	263.6	269.6	272.8	273.8	273.3	269.9	264.7
<b>30</b>	234.2	245.8	256.1	263.7	269.4	272.9	273.8	273.4	270.1	264.8
<b>35</b>	234.1	246.2	256.2	264.0	269.7	273.0	273.8	273.3	270.1	264.6
<b>40</b>	234.5	246.2	256.1	264.1	269.6	273.0	273.8	273.3	269.8	264.3
<b>45</b>	234.5	246.3	256.2	263.9	269.7	273.1	273.8	273.2	269.9	264.3
<b>50</b>	234.9	246.6	256.3	264.1	269.8	273.1	273.8	273.2	269.7	264.4
<b>55</b>	234.9	246.6	256.6	264.3	269.6	273.2	273.8	273.1	269.9	264.1
<b>60</b>	235.2	247.0	256.7	264.1	269.9	273.2	273.8	273.0	269.5	264.0
<b>65</b>	235.5	246.9	256.7	264.3	269.8	273.2	273.8	272.9	269.7	264.1
<b>70</b>	235.5	247.3	257.1	264.6	269.8	273.2	273.8	272.8	269.5	263.9
<b>75</b>	236.0	247.4	256.9	264.7	270.1	273.2	273.8	272.7	269.3	263.7

# RP Lighting • Fans

## Photometric Data Table [Unit:cd] 4336-15

80	235.9	247.5	257.3	264.7	269.8	273.1	273.8	272.6	269.5	263.8
85	236.3	247.9	257.2	264.6	270.1	273.1	273.8	272.6	269.4	263.8
90	236.4	247.8	257.4	264.6	270.0	273.1	273.8	272.7	269.1	263.5
95	236.5	248.0	257.5	264.8	269.9	273.0	273.8	272.7	269.0	263.5
100	236.8	248.1	257.4	265.0	270.2	273.0	273.8	272.7	268.9	263.6
105	236.6	248.0	257.7	265.0	269.9	272.9	273.8	272.6	268.9	263.2
110	236.9	248.3	257.5	265.0	270.0	272.9	273.8	272.5	269.0	263.4
115	237.0	248.1	257.8	264.8	270.2	272.9	273.8	272.3	269.1	263.2
120	236.8	248.4	257.6	264.8	269.9	272.8	273.8	272.2	269.0	263.1
125	237.1	248.3	257.7	264.8	270.2	272.8	273.8	272.3	268.8	263.2
130	237.0	248.3	257.8	265.0	269.9	272.8	273.8	272.3	268.7	262.9
135	237.0	248.4	257.8	265.1	270.1	272.8	273.8	272.3	268.7	263.1
140	237.1	248.2	257.5	265.1	270.1	272.8	273.8	272.4	268.9	263.0
145	236.9	248.2	257.7	265.0	269.9	272.8	273.8	272.3	268.8	262.8
150	237.0	248.3	257.5	264.8	270.1	272.8	273.8	272.2	268.6	263.1
155	236.9	248.1	257.5	264.6	269.9	272.9	273.8	272.2	268.6	262.8
160	236.5	247.9	257.5	264.6	269.8	272.9	273.8	272.2	268.9	263.1
165	236.6	248.0	257.2	264.6	270.0	272.9	273.8	272.2	268.8	262.9
170	236.3	247.7	257.4	264.7	269.7	273.0	273.8	272.3	268.7	263.3
175	236.2	247.6	257.0	264.6	269.7	272.9	273.8	272.4	268.8	263.1
180	235.9	247.6	257.1	264.4	269.9	272.9	273.8	272.6	269.0	263.4
185	235.9	247.2	256.8	264.2	269.5	272.7	273.8	272.7	269.2	263.4
190	235.5	247.2	256.7	264.3	269.8	272.6	273.8	272.6	269.3	263.3
195	235.4	246.9	256.7	264.3	269.6	272.6	273.8	272.5	269.3	263.7
200	235.2	246.7	256.3	264.0	269.5	272.7	273.8	272.6	269.2	263.7
205	234.8	246.7	256.3	263.9	269.6	272.9	273.8	272.7	269.4	263.7
210	234.9	246.3	256.4	264.0	269.3	272.9	273.8	272.9	269.6	264.0
215	234.6	246.4	256.3	263.9	269.4	272.8	273.8	273.0	269.4	264.1
220	234.3	246.0	256.1	263.6	269.5	272.6	273.8	273.0	269.8	264.0
225	234.3	246.0	255.7	263.6	269.2	272.8	273.8	272.9	269.6	264.3
230	233.9	245.9	255.7	263.7	269.1	272.8	273.8	273.0	269.7	264.5
235	234.0	245.7	255.8	263.6	269.1	272.7	273.8	273.0	269.7	264.4
240	233.7	245.8	255.6	263.5	269.1	272.5	273.8	272.9	270.0	264.4
245	233.8	245.5	255.4	263.2	269.2	272.5	273.8	272.9	269.9	264.5
250	233.7	245.7	255.6	263.4	269.2	272.4	273.8	272.9	269.9	264.7
255	233.5	245.4	255.5	263.3	269.0	272.5	273.8	272.9	270.1	264.9
260	233.7	245.5	255.3	263.2	268.8	272.6	273.8	272.9	270.0	265.0
265	233.5	245.5	255.5	263.3	268.8	272.6	273.8	272.9	269.9	264.9
270	233.7	245.4	255.5	263.1	269.0	272.5	273.8	272.9	270.1	264.7
275	233.5	245.5	255.2	263.4	269.1	272.3	273.8	272.8	270.1	264.7
280	233.5	245.4	255.4	263.1	269.0	272.3	273.8	272.9	269.8	264.8
285	233.5	245.2	255.4	263.2	268.9	272.2	273.8	272.9	270.1	264.9
290	233.3	245.3	255.3	263.1	268.7	272.2	273.8	272.9	269.9	265.0
295	233.5	245.3	255.4	263.0	268.7	272.3	273.8	272.9	269.9	265.0
300	233.2	245.1	255.1	263.2	268.9	272.3	273.8	272.9	270.1	265.0
305	233.5	245.3	255.2	262.9	268.9	272.3	273.8	273.0	269.8	265.0
310	233.2	245.0	255.2	263.0	268.8	272.4	273.8	273.0	270.1	264.8
315	233.3	245.3	255.0	263.1	268.6	272.5	273.8	273.1	269.9	264.8
320	233.1	245.1	255.3	262.9	268.9	272.5	273.8	273.1	269.9	264.7

# RP Lighting • Fans

## Photometric Data Table [Unit:cd] 4336-15

325	233.4	245.2	255.1	263.2	268.8	272.6	273.8	273.1	270.1	264.8
330	233.1	245.2	255.1	263.0	268.7	272.5	273.8	273.1	270.1	264.9
335	233.3	245.1	255.3	263.1	268.7	272.4	273.8	273.1	269.8	265.0
340	233.2	245.3	255.1	263.2	268.9	272.4	273.8	273.1	270.0	265.1
345	233.3	245.0	255.2	263.0	269.0	272.3	273.8	273.0	270.1	265.0
350	233.3	245.3	255.4	263.3	269.1	272.4	273.8	273.0	269.8	264.9
355	233.2	245.2	255.2	263.1	269.1	272.5	273.8	273.0	270.0	264.7
360	233.5	245.4	255.7	263.5	269.1	272.7	273.8	273.3	270.3	265.1

C\G	20	25	30	35	40	45	50	55	60	65
0	257.5	248.2	236.8	223.2	208.0	191.4	173.4	154.6	135.6	116.7
5	257.7	247.9	236.4	223.1	208.0	191.3	173.3	154.6	135.4	116.4
10	257.3	248.0	236.4	223.0	207.7	191.0	173.1	154.2	135.1	116.2
15	257.5	247.7	236.2	222.7	207.6	190.9	172.7	154.1	135.0	115.9
20	257.2	247.6	236.0	222.7	207.4	190.6	172.7	153.7	134.5	115.6
25	257.2	247.7	236.1	222.3	207.1	190.4	172.2	153.4	134.4	115.2
30	257.2	247.3	235.7	222.3	206.9	190.1	172.1	153.2	134.0	115.1
35	256.9	247.3	235.8	222.1	206.8	190.0	171.8	152.8	133.8	114.6
40	257.0	247.2	235.4	221.8	206.6	189.6	171.6	152.7	133.4	114.4
45	256.6	246.9	235.4	221.8	206.3	189.6	171.4	152.3	133.2	114.1
50	256.8	247.0	235.2	221.4	206.2	189.2	171.0	152.2	132.8	113.8
55	256.5	246.6	234.9	221.4	205.8	189.1	171.0	151.9	132.6	113.5
60	256.3	246.8	235.0	221.2	205.9	188.8	170.6	151.6	132.4	113.2
65	256.2	246.5	234.7	220.9	205.5	188.6	170.5	151.5	132.1	113.1
70	256.3	246.4	234.5	220.7	205.5	188.6	170.3	151.2	131.9	112.8
75	256.3	246.4	234.6	220.8	205.3	188.2	170.1	151.2	131.8	112.7
80	256.0	246.1	234.3	220.5	205.0	188.3	170.1	150.9	131.5	112.5
85	255.8	246.2	234.4	220.5	205.1	188.0	169.8	150.8	131.5	112.4
90	255.9	245.9	234.1	220.4	205.0	187.9	169.8	150.6	131.3	112.3
95	255.9	246.0	234.1	220.1	204.7	187.8	169.6	150.4	131.2	112.1
100	255.7	245.7	234.0	220.2	204.5	187.5	169.3	150.3	131.0	112.1
105	255.4	245.6	233.7	219.8	204.4	187.5	169.3	150.2	130.8	111.9
110	255.6	245.6	233.6	219.9	204.4	187.2	169.1	149.9	130.8	111.9
115	255.3	245.6	233.6	219.6	204.0	187.1	168.8	149.8	130.5	111.7
120	255.2	245.2	233.4	219.5	204.0	187.0	168.7	149.7	130.6	111.6
125	255.3	245.3	233.3	219.5	204.0	186.8	168.6	149.5	130.3	111.6
130	255.2	245.2	233.4	219.3	203.7	186.8	168.4	149.5	130.4	111.5
135	255.0	245.1	233.1	219.4	203.7	186.6	168.5	149.3	130.3	111.6
140	255.1	245.2	233.3	219.1	203.7	186.7	168.3	149.5	130.2	111.4
145	254.9	244.9	233.0	219.3	203.6	186.5	168.5	149.3	130.3	111.5
150	255.1	245.2	233.2	219.2	203.8	186.6	168.3	149.4	130.2	111.5
155	255.2	244.9	233.2	219.3	203.6	186.5	168.4	149.4	130.4	111.6
160	255.0	245.2	233.1	219.3	203.8	186.8	168.5	149.4	130.3	111.5
165	255.2	245.2	233.4	219.3	203.8	186.6	168.5	149.6	130.4	111.7
170	255.4	245.2	233.2	219.6	203.8	187.0	168.7	149.6	130.5	111.7
175	255.3	245.4	233.6	219.5	204.1	186.9	168.7	149.9	130.7	111.9
180	255.4	245.3	233.5	219.8	204.1	187.1	169.0	149.9	130.8	112.0
185	255.7	245.7	233.8	219.8	204.4	187.4	169.1	150.2	131.1	112.1



# RP Lighting • Fans

## Photometric Data Table [Unit:cd] 4336-15

<b>190</b>	255.6	245.6	233.9	220.1	204.6	187.4	169.4	150.4	131.1	112.4
<b>195</b>	255.6	246.0	234.0	220.1	204.6	187.8	169.5	150.5	131.4	112.5
<b>200</b>	255.9	246.0	234.3	220.5	204.8	187.9	169.7	150.9	131.7	112.8
<b>205</b>	256.2	246.2	234.2	220.5	205.0	188.1	170.2	151.0	131.9	112.9
<b>210</b>	256.3	246.5	234.7	220.9	205.5	188.5	170.3	151.5	132.3	113.2
<b>215</b>	256.3	246.4	234.7	221.0	205.5	188.6	170.7	151.6	132.4	113.5
<b>220</b>	256.4	246.8	234.9	221.3	206.0	189.1	170.9	152.0	132.8	113.8
<b>225</b>	256.6	246.8	235.3	221.6	206.1	189.3	171.2	152.3	133.1	114.2
<b>230</b>	256.9	247.1	235.3	221.6	206.4	189.6	171.6	152.6	133.4	114.4
<b>235</b>	256.8	247.3	235.6	222.1	206.8	189.9	171.7	152.8	133.9	114.8
<b>240</b>	257.2	247.3	235.7	222.2	206.8	190.1	172.1	153.3	134.0	115.0
<b>245</b>	257.0	247.5	236.1	222.3	207.3	190.5	172.4	153.5	134.4	115.4
<b>250</b>	257.4	247.6	236.0	222.8	207.3	190.6	172.7	153.9	134.7	115.6
<b>255</b>	257.3	248.0	236.4	222.7	207.8	191.0	172.9	154.1	134.8	115.8
<b>260</b>	257.4	247.9	236.4	223.1	207.8	191.1	173.3	154.3	135.2	116.1
<b>265</b>	257.6	248.0	236.6	223.2	208.0	191.4	173.3	154.6	135.3	116.2
<b>270</b>	257.4	248.3	236.8	223.3	208.2	191.5	173.6	154.6	135.5	116.5
<b>275</b>	257.7	248.1	236.6	223.5	208.2	191.5	173.6	154.9	135.7	116.6
<b>280</b>	257.5	248.3	236.9	223.3	208.4	191.6	173.7	154.8	135.7	116.7
<b>285</b>	257.7	248.1	236.8	223.6	208.3	191.8	173.8	155.0	135.7	116.7
<b>290</b>	257.6	248.3	236.8	223.3	208.5	191.7	173.7	155.0	135.8	116.9
<b>295</b>	257.8	248.2	237.0	223.6	208.4	191.8	173.9	155.0	136.0	116.8
<b>300</b>	257.5	248.2	236.8	223.4	208.4	191.9	173.8	155.1	135.9	117.0
<b>305</b>	257.8	248.4	236.9	223.5	208.5	191.8	174.0	155.0	136.0	116.9
<b>310</b>	257.5	248.1	237.0	223.6	208.3	192.0	173.9	155.3	135.9	117.1
<b>315</b>	257.7	248.4	236.8	223.4	208.3	191.8	174.0	155.1	136.2	117.2
<b>320</b>	257.6	248.1	236.9	223.7	208.6	192.0	174.0	155.2	136.1	117.1
<b>325</b>	257.5	248.2	237.0	223.4	208.5	191.8	173.9	155.2	136.0	117.3
<b>330</b>	257.7	248.2	236.7	223.5	208.4	191.8	174.0	155.1	136.2	117.1
<b>335</b>	257.5	248.1	237.0	223.4	208.6	191.8	173.8	155.2	136.1	117.3
<b>340</b>	257.7	248.3	236.8	223.6	208.3	191.7	173.9	155.0	136.0	117.1
<b>345</b>	257.4	248.0	236.6	223.3	208.4	191.8	173.7	155.1	136.0	117.1
<b>350</b>	257.6	248.2	236.8	223.4	208.1	191.5	173.7	154.9	135.8	117.0
<b>355</b>	257.4	248.0	236.5	223.1	208.2	191.5	173.6	154.8	135.6	116.8
<b>360</b>	257.5	248.2	236.8	223.2	208.0	191.4	173.4	154.6	135.6	116.7
<b>C\G</b>	<b>70</b>	<b>75</b>	<b>80</b>	<b>85</b>	<b>90</b>	<b>95</b>	<b>100</b>	<b>105</b>	<b>110</b>	<b>115</b>
<b>0</b>	98.5	81.4	66.1	52.7	41.6	32.6	26.0	21.3	18.5	17.2
<b>5</b>	98.2	81.3	65.9	52.6	41.4	32.5	25.8	21.3	18.5	17.1
<b>10</b>	98.1	80.9	65.7	52.3	41.2	32.3	25.7	21.2	18.4	17.1
<b>15</b>	97.7	80.7	65.4	52.0	40.9	32.1	25.5	21.0	18.3	17.0
<b>20</b>	97.4	80.3	65.0	51.8	40.7	31.9	25.3	20.9	18.3	17.0
<b>25</b>	97.1	80.1	64.7	51.4	40.4	31.6	25.2	20.8	18.1	17.0
<b>30</b>	96.7	79.7	64.4	51.1	40.1	31.4	25.0	20.6	18.1	16.9
<b>35</b>	96.5	79.3	64.1	50.8	39.8	31.1	24.8	20.5	18.0	16.9
<b>40</b>	96.0	79.0	63.7	50.5	39.5	30.9	24.6	20.4	17.9	16.8
<b>45</b>	95.8	78.6	63.4	50.2	39.3	30.7	24.5	20.2	17.8	16.8
<b>50</b>	95.4	78.4	63.1	49.9	39.0	30.5	24.3	20.1	17.7	16.7

## RP Lighting • Fans

### Photometric Data Table [Unit:cd] 4336-15

55	95.2	78.1	62.8	49.7	38.9	30.4	24.2	20.1	17.7	16.7
60	95.0	77.9	62.7	49.5	38.7	30.2	24.1	20.0	17.7	16.6
65	94.7	77.7	62.4	49.4	38.6	30.1	24.0	20.0	17.6	16.6
70	94.6	77.6	62.3	49.2	38.5	30.1	24.0	20.0	17.6	16.6
75	94.4	77.3	62.2	49.2	38.4	30.0	24.0	20.0	17.6	16.6
80	94.3	77.3	62.1	49.1	38.4	30.0	24.0	19.9	17.6	16.7
85	94.1	77.2	62.1	49.1	38.4	30.0	24.0	20.0	17.7	16.7
90	94.1	77.2	62.0	49.1	38.4	30.1	24.0	20.0	17.7	16.7
95	94.0	77.1	62.1	49.1	38.4	30.1	24.1	20.1	17.7	16.8
100	93.9	77.0	62.0	49.1	38.5	30.1	24.1	20.1	17.8	16.8
105	93.8	77.1	62.1	49.2	38.5	30.2	24.2	20.1	17.8	16.8
110	93.8	77.0	62.1	49.3	38.6	30.3	24.2	20.2	17.8	16.9
115	93.7	77.1	62.1	49.3	38.7	30.4	24.3	20.2	17.9	16.9
120	93.7	77.0	62.2	49.4	38.7	30.4	24.3	20.3	17.9	16.9
125	93.7	77.0	62.1	49.4	38.8	30.5	24.4	20.3	18.0	17.0
130	93.6	77.0	62.2	49.5	38.8	30.5	24.4	20.4	18.0	17.0
135	93.7	77.0	62.2	49.5	38.9	30.6	24.5	20.4	18.0	17.0
140	93.6	77.0	62.2	49.5	38.9	30.6	24.5	20.4	18.0	17.0
145	93.7	77.0	62.2	49.6	39.0	30.7	24.5	20.4	18.0	17.0
150	93.6	77.1	62.3	49.5	39.0	30.6	24.6	20.4	18.0	17.0
155	93.7	77.0	62.3	49.6	39.0	30.7	24.5	20.4	18.0	17.0
160	93.7	77.1	62.3	49.6	39.0	30.7	24.6	20.4	18.0	17.0
165	93.7	77.1	62.3	49.6	39.0	30.7	24.6	20.4	18.0	17.0
170	93.9	77.1	62.3	49.6	39.1	30.7	24.5	20.4	18.0	17.0
175	93.9	77.2	62.4	49.7	39.0	30.7	24.5	20.4	18.0	17.0
180	94.1	77.2	62.4	49.7	39.1	30.7	24.5	20.4	18.0	17.0
185	94.1	77.4	62.6	49.7	39.1	30.7	24.5	20.4	18.0	16.9
190	94.3	77.5	62.6	49.8	39.1	30.7	24.5	20.4	18.0	16.9
195	94.5	77.7	62.7	49.8	39.1	30.7	24.6	20.4	18.0	17.0
200	94.6	77.8	62.8	50.0	39.2	30.7	24.6	20.4	18.0	16.9
205	94.9	78.0	62.9	50.0	39.2	30.8	24.6	20.4	18.0	17.0
210	95.0	78.2	63.1	50.1	39.3	30.8	24.6	20.4	18.0	17.0
215	95.4	78.5	63.2	50.2	39.3	30.8	24.6	20.4	18.0	17.0
220	95.6	78.6	63.5	50.3	39.4	30.9	24.7	20.5	18.0	17.0
225	95.9	78.9	63.6	50.6	39.6	31.0	24.7	20.5	18.1	17.0
230	96.1	79.1	63.9	50.7	39.7	31.1	24.8	20.6	18.0	17.0
235	96.6	79.4	64.0	50.8	39.8	31.1	24.8	20.6	18.1	17.0
240	96.7	79.7	64.2	51.0	39.9	31.2	24.9	20.6	18.1	17.0
245	97.1	79.8	64.5	51.1	40.0	31.3	24.9	20.7	18.1	17.0
250	97.3	80.2	64.6	51.2	40.1	31.4	25.0	20.7	18.2	17.1
255	97.5	80.3	64.9	51.5	40.3	31.5	25.1	20.8	18.2	17.1
260	97.8	80.5	65.0	51.6	40.4	31.6	25.1	20.8	18.2	17.1
265	97.9	80.7	65.2	51.8	40.5	31.7	25.2	20.8	18.2	17.1
270	98.2	80.8	65.3	51.9	40.7	31.8	25.3	20.9	18.3	17.1
275	98.2	81.0	65.5	52.0	40.8	31.9	25.4	20.9	18.3	17.1
280	98.4	81.1	65.6	52.2	40.9	32.0	25.4	21.0	18.3	17.1
285	98.4	81.3	65.8	52.3	41.1	32.1	25.5	21.0	18.3	17.1
290	98.5	81.3	65.9	52.5	41.2	32.2	25.6	21.1	18.4	17.1
295	98.6	81.4	66.0	52.5	41.3	32.3	25.7	21.1	18.4	17.1

# RP Lighting • Fans

## Photometric Data Table [Unit:cd] 4336-15

<b>300</b>	98.6	81.5	66.1	52.7	41.4	32.4	25.7	21.2	18.4	17.1
<b>305</b>	98.8	81.6	66.2	52.8	41.6	32.6	25.8	21.2	18.4	17.1
<b>310</b>	98.7	81.8	66.4	52.9	41.7	32.7	25.9	21.3	18.5	17.1
<b>315</b>	98.9	81.9	66.4	53.0	41.8	32.8	26.0	21.3	18.5	17.2
<b>320</b>	99.0	81.9	66.6	53.1	41.9	32.9	26.1	21.4	18.5	17.2
<b>325</b>	99.0	82.0	66.6	53.2	42.0	32.9	26.1	21.4	18.6	17.2
<b>330</b>	99.1	82.0	66.7	53.2	42.0	33.0	26.2	21.5	18.6	17.2
<b>335</b>	99.0	82.0	66.7	53.3	42.1	33.0	26.2	21.5	18.6	17.2
<b>340</b>	99.1	82.1	66.6	53.3	42.0	33.0	26.2	21.5	18.6	17.2
<b>345</b>	98.9	81.9	66.6	53.2	42.0	33.0	26.2	21.5	18.6	17.2
<b>350</b>	98.9	81.8	66.4	53.1	41.9	32.9	26.1	21.4	18.6	17.2
<b>355</b>	98.7	81.6	66.4	53.0	41.8	32.8	26.1	21.4	18.6	17.2
<b>360</b>	98.5	81.4	66.1	52.7	41.6	32.6	26.0	21.3	18.5	17.2
<b>C\G</b>	<b>120</b>	<b>125</b>	<b>130</b>	<b>135</b>	<b>140</b>	<b>145</b>	<b>150</b>	<b>155</b>	<b>160</b>	<b>165</b>
<b>0</b>	16.9	17.2	17.8	17.7	17.1	16.2	14.7	13.1	11.3	9.2
<b>5</b>	16.9	17.3	17.8	17.8	17.1	16.3	14.8	13.2	11.3	9.2
<b>10</b>	16.8	17.2	17.8	17.8	17.4	16.8	15.6	13.9	11.8	9.5
<b>15</b>	16.9	17.2	17.7	18.0	17.7	17.2	16.3	14.8	12.6	9.9
<b>20</b>	16.8	17.2	17.8	18.1	17.9	17.5	16.6	15.5	13.4	10.5
<b>25</b>	16.8	17.2	17.8	18.2	18.1	17.7	16.9	15.9	14.1	11.1
<b>30</b>	16.7	17.2	17.8	18.2	18.2	17.8	17.0	16.0	14.4	11.7
<b>35</b>	16.7	17.1	17.8	18.2	18.2	17.8	17.2	16.2	14.7	12.0
<b>40</b>	16.7	17.1	17.8	18.3	18.3	17.8	17.2	16.2	14.8	12.2
<b>45</b>	16.6	17.1	17.7	18.3	18.3	17.9	17.2	16.3	14.8	12.3
<b>50</b>	16.6	17.1	17.8	18.3	18.2	17.9	17.2	16.2	14.8	12.3
<b>55</b>	16.6	17.1	17.8	18.2	18.2	17.9	17.2	16.2	14.7	12.3
<b>60</b>	16.6	17.1	17.7	18.2	18.2	17.8	17.1	16.0	14.6	12.0
<b>65</b>	16.6	17.0	17.8	18.2	18.1	17.7	16.9	15.8	14.3	11.8
<b>70</b>	16.6	17.1	17.8	18.1	18.0	17.5	16.7	15.7	14.0	11.4
<b>75</b>	16.6	17.1	17.7	18.0	17.9	17.3	16.5	15.3	13.4	10.7
<b>80</b>	16.6	17.1	17.7	17.9	17.6	17.0	16.1	14.6	12.5	10.0
<b>85</b>	16.6	17.2	17.7	17.6	17.2	16.3	15.2	13.5	11.5	9.3
<b>90</b>	16.7	17.2	17.8	17.6	16.8	15.7	14.4	12.7	10.8	8.7
<b>95</b>	16.7	17.2	17.8	17.6	16.8	15.7	14.2	12.4	10.5	8.4
<b>100</b>	16.7	17.2	17.8	17.6	17.1	16.2	14.8	13.0	10.8	8.5
<b>105</b>	16.8	17.3	17.8	18.0	17.6	16.9	15.9	14.0	11.6	8.9
<b>110</b>	16.8	17.3	17.9	18.1	17.9	17.3	16.4	14.9	12.5	9.5
<b>115</b>	16.8	17.3	17.9	18.3	18.1	17.6	16.7	15.5	13.4	10.1
<b>120</b>	16.9	17.3	18.0	18.3	18.2	17.7	16.9	15.7	13.8	10.7
<b>125</b>	16.9	17.3	18.0	18.4	18.3	17.8	17.0	15.9	14.2	11.2
<b>130</b>	16.9	17.4	18.0	18.4	18.4	17.9	17.0	16.1	14.3	11.5
<b>135</b>	16.9	17.4	18.0	18.4	18.4	17.9	17.2	16.1	14.4	11.6
<b>140</b>	17.0	17.4	18.1	18.4	18.4	17.9	17.2	16.1	14.4	11.6
<b>145</b>	16.9	17.4	18.1	18.4	18.3	17.9	17.1	16.0	14.3	11.5
<b>150</b>	16.9	17.4	18.0	18.4	18.2	17.8	17.0	15.9	14.2	11.3
<b>155</b>	16.9	17.4	18.0	18.3	18.2	17.7	16.9	15.8	13.8	11.0
<b>160</b>	16.9	17.4	18.0	18.2	18.0	17.5	16.7	15.5	13.3	10.3

## RP Lighting • Fans

### Photometric Data Table [Unit:cd] 4336-15

<b>165</b>	16.9	17.3	17.9	18.1	17.8	17.2	16.4	14.9	12.6	9.8
<b>170</b>	16.9	17.3	17.8	17.9	17.5	16.8	15.8	14.0	11.7	9.2
<b>175</b>	16.9	17.4	17.9	17.6	17.0	16.1	14.8	13.1	10.9	8.6
<b>180</b>	16.9	17.3	17.9	17.6	16.8	15.6	14.2	12.6	10.6	8.4
<b>185</b>	16.8	17.3	17.8	17.6	16.8	15.8	14.5	12.8	10.7	8.4
<b>190</b>	16.9	17.3	17.8	17.7	17.3	16.6	15.3	13.6	11.3	8.9
<b>195</b>	16.9	17.3	17.8	18.0	17.8	17.1	16.2	14.7	12.2	9.5
<b>200</b>	16.9	17.3	17.9	18.2	18.0	17.4	16.6	15.4	13.1	10.1
<b>205</b>	16.9	17.3	17.9	18.3	18.2	17.7	16.9	15.8	13.7	10.7
<b>210</b>	16.9	17.3	18.0	18.4	18.3	17.9	17.1	16.0	14.2	11.2
<b>215</b>	16.9	17.3	18.0	18.4	18.4	18.0	17.2	16.2	14.4	11.6
<b>220</b>	16.9	17.3	17.9	18.4	17.9	17.4	16.5	15.4	13.9	11.7
<b>225</b>	16.9	17.3	18.0	18.0	17.9	17.5	16.6	15.4	13.7	11.1
<b>230</b>	16.9	17.3	17.8	18.1	18.2	18.0	17.1	15.9	13.9	10.9
<b>235</b>	16.9	17.3	17.9	18.4	18.4	18.0	17.2	16.1	14.0	10.7
<b>240</b>	16.9	17.3	18.0	18.4	18.4	17.9	17.1	16.1	14.0	10.5
<b>245</b>	16.9	17.3	18.0	18.3	18.3	17.8	17.0	15.9	13.7	9.9
<b>250</b>	16.9	17.3	17.9	18.3	18.1	17.6	16.7	15.6	13.2	9.4
<b>255</b>	16.9	17.3	17.9	18.1	17.9	17.3	16.4	14.8	12.3	8.8
<b>260</b>	16.9	17.3	17.8	17.9	17.6	16.8	15.6	13.8	10.9	8.3
<b>265</b>	16.9	17.3	17.9	17.8	17.1	16.1	14.8	13.1	10.4	8.0
<b>270</b>	16.9	17.3	17.9	17.8	17.1	15.9	14.4	12.6	10.2	8.0
<b>275</b>	16.9	17.3	17.9	17.8	17.1	16.2	15.0	13.0	10.6	8.5
<b>280</b>	16.9	17.3	17.9	17.9	17.6	17.0	15.9	13.9	11.4	9.2
<b>285</b>	16.9	17.2	17.9	18.1	17.9	17.1	16.0	14.7	12.5	9.9
<b>290</b>	16.9	17.1	17.5	18.0	17.8	17.1	16.2	15.1	13.3	10.7
<b>295</b>	16.9	17.2	17.5	17.7	17.6	17.2	16.4	15.4	13.9	11.4
<b>300</b>	16.8	17.2	17.8	18.0	17.7	17.2	16.5	15.6	14.3	11.9
<b>305</b>	16.9	17.2	17.8	18.3	18.3	17.6	16.8	16.2	14.7	12.2
<b>310</b>	16.8	17.2	17.8	18.3	18.3	18.0	17.3	16.3	14.9	12.4
<b>315</b>	16.9	17.2	17.8	18.3	18.3	18.0	17.4	16.3	14.9	12.5
<b>320</b>	16.9	17.2	17.8	18.3	18.4	18.0	17.4	16.4	14.9	12.4
<b>325</b>	16.9	17.2	17.8	18.3	18.4	17.9	17.3	16.3	14.9	12.3
<b>330</b>	16.9	17.2	17.8	18.3	18.3	17.9	17.2	16.2	14.7	12.1
<b>335</b>	16.9	17.2	17.8	18.2	18.2	17.8	17.0	16.0	14.4	11.7
<b>340</b>	16.9	17.2	17.8	18.1	18.1	17.7	16.8	15.8	14.0	11.2
<b>345</b>	16.9	17.2	17.7	18.0	17.9	17.4	16.6	15.4	13.3	10.6
<b>350</b>	16.9	17.2	17.7	17.9	17.6	17.1	16.2	14.6	12.5	10.0
<b>355</b>	16.9	17.2	17.8	17.7	17.2	16.5	15.3	13.7	11.7	9.5
<b>360</b>	16.9	17.2	17.8	17.7	17.1	16.2	14.7	13.1	11.3	9.2

<b>CVG</b>	<b>170</b>	<b>175</b>	<b>180</b>
<b>0</b>	6.9	4.2	1.4
<b>5</b>	6.9	4.2	1.5
<b>10</b>	6.9	4.2	1.5
<b>15</b>	7.1	4.2	1.5
<b>20</b>	7.4	4.2	1.5
<b>25</b>	7.7	4.2	1.5

## RP Lighting • Fans

### Photometric Data Table [Unit:cd] 4336-15

30	8.0	4.2	1.5
35	8.3	4.2	1.5
40	8.6	4.3	1.6
45	8.8	4.2	1.6
50	8.9	4.2	1.6
55	8.8	4.1	1.6
60	8.7	4.1	1.5
65	8.3	4.0	1.5
70	7.9	3.9	1.4
75	7.5	3.7	1.3
80	7.1	3.6	1.3
85	6.7	3.4	1.3
90	6.4	3.2	1.3
95	6.2	3.2	1.3
100	6.1	3.2	1.3
105	6.1	3.1	1.4
110	6.4	3.1	1.5
115	6.6	3.0	1.5
120	6.8	3.0	1.6
125	7.1	3.0	1.6
130	7.3	3.0	1.6
135	7.5	3.0	1.6
140	7.6	3.0	1.5
145	7.6	2.9	1.5
150	7.4	2.9	1.5
155	7.1	2.9	1.5
160	6.9	2.8	1.5
165	6.6	2.8	1.5
170	6.3	2.7	1.5
175	6.1	2.7	1.4
180	6.0	2.7	1.5
185	6.0	2.7	1.4
190	6.2	2.7	1.4
195	6.4	2.8	1.4
200	6.7	2.8	1.4
205	7.0	2.9	1.4
210	7.3	2.9	1.4
215	7.6	3.0	1.4
220	7.6	3.0	1.4
225	7.5	3.0	1.4
230	7.3	3.0	1.4
235	7.1	2.9	1.4
240	6.8	2.9	1.3
245	6.5	2.9	1.3
250	6.2	3.0	1.3
255	6.0	3.0	1.3
260	6.0	3.2	1.3
265	5.9	3.2	1.3
270	6.0	3.3	1.3

## RP Lighting • Fans

### Photometric Data Table [Unit:cd] 4336-15

275	6.2	3.4	1.3
280	6.6	3.5	1.3
285	7.1	3.7	1.3
290	7.6	3.8	1.4
295	8.0	4.0	1.4
300	8.5	4.1	1.4
305	8.8	4.2	1.4
310	9.0	4.2	1.4
315	9.1	4.3	1.4
320	9.0	4.4	1.4
325	8.9	4.4	1.4
330	8.6	4.4	1.4
335	8.3	4.4	1.4
340	8.0	4.4	1.4
345	7.6	4.3	1.4
350	7.3	4.3	1.4
355	7.1	4.3	1.4
360	6.9	4.2	1.4


# RP Lighting • Fans

## Zonal Flux 4336-15

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum.Flux [lm]	Zonal Flux [%]	Sum.Flux [%]
0	273.78	0.00	0.00	0.00	0.00
5	272.83	6.53	6.53	-653.46	-653.46
10	269.58	19.40	25.94	-1940.37	-2593.83
15	264.14	31.66	57.60	-3166.01	-5759.83
20	256.55	42.91	100.51	-4291.25	-10051.08
25	246.86	52.80	153.31	-5279.84	-15330.91
30	235.19	61.00	214.31	-6100.37	-21431.29
35	221.56	67.26	281.57	-6726.03	-28157.32
40	206.23	71.37	352.95	-7137.45	-35294.77
45	189.38	73.25	426.20	-7325.14	-42619.92
50	171.31	72.88	499.08	-7288.44	-49908.37
55	152.40	70.39	569.47	-7038.64	-56947.00
60	133.22	66.02	635.49	-6601.95	-63548.92
65	114.26	60.16	695.65	-6016.13	-69565.05
70	96.11	53.27	748.92	-5326.57	-74891.62
75	79.16	45.81	794.73	-4581.09	-79472.71
80	63.95	38.29	833.02	-3829.14	-83301.84
85	50.84	31.19	864.21	-3119.16	-86420.99
90	39.90	24.85	889.06	-2484.59	-88905.58
95	31.29	19.49	908.55	-1949.19	-90854.78
100	24.93	15.28	923.82	-1527.56	-92382.34
105	20.64	12.19	936.02	-1219.24	-93601.62
110	18.09	10.12	946.14	-1012.36	-94613.96
115	16.96	8.88	955.02	-887.67	-95501.68
120	16.82	8.21	963.23	-821.22	-96322.88
125	17.24	7.87	971.10	-787.14	-97110.02
130	17.84	7.63	978.73	-762.58	-97872.59
135	18.08	7.26	985.98	-725.65	-98598.24
140	17.85	6.65	992.63	-665.20	-99263.42
145	17.27	5.86	998.49	-585.95	-99849.36
150	16.35	4.95	1003.44	-495.05	-100344.43
155	15.05	3.97	1007.42	-397.31	-100741.74
160	13.13	2.96	1010.37	-295.54	-101037.27
165	10.48	1.95	1012.32	-194.62	-101231.88
170	7.29	1.05	1013.37	-105.46	-101337.34
175	3.51	0.39	1013.76	-38.66	-101375.98
180	1.43	0.06	1013.82	-5.91	-101381.88



# RP Lighting • Fans

## Coefficient Utilization Curve 4336-15

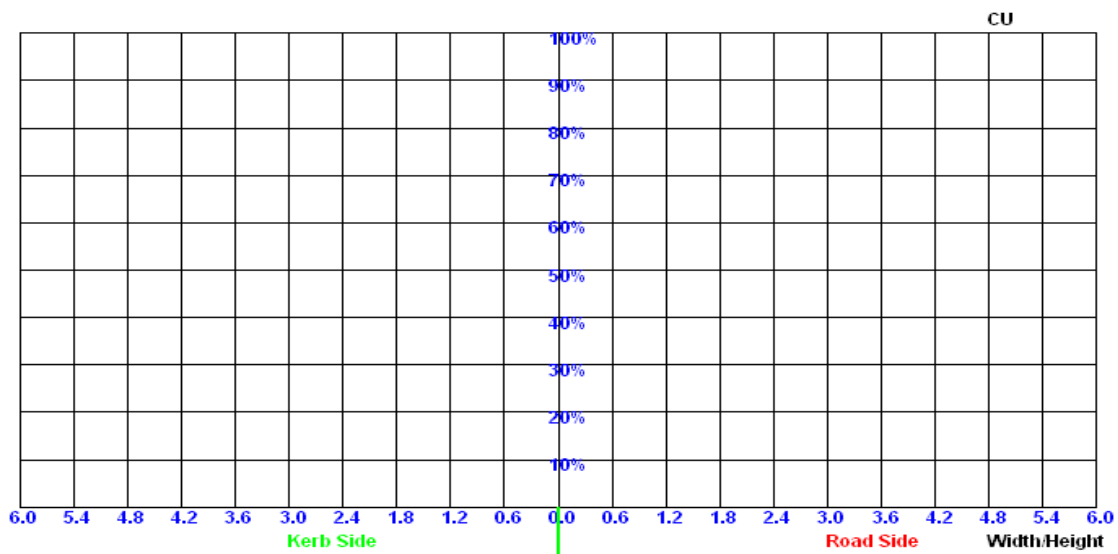




# Light Distribution Curve[Unit: cd]

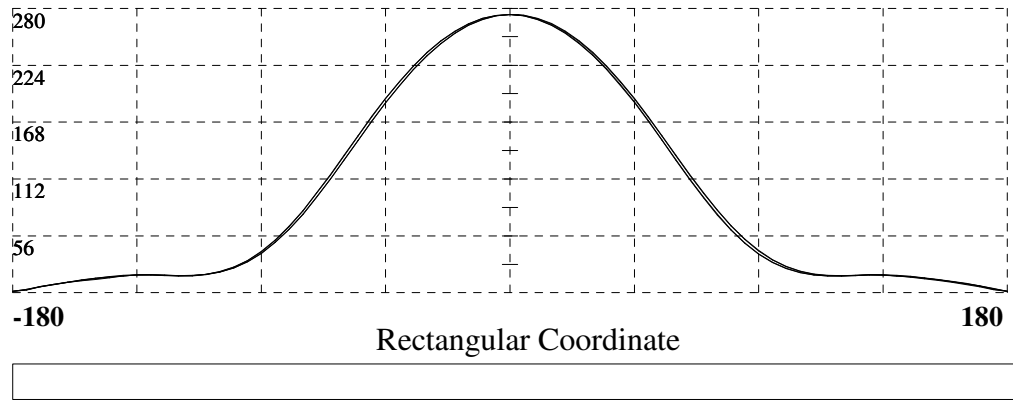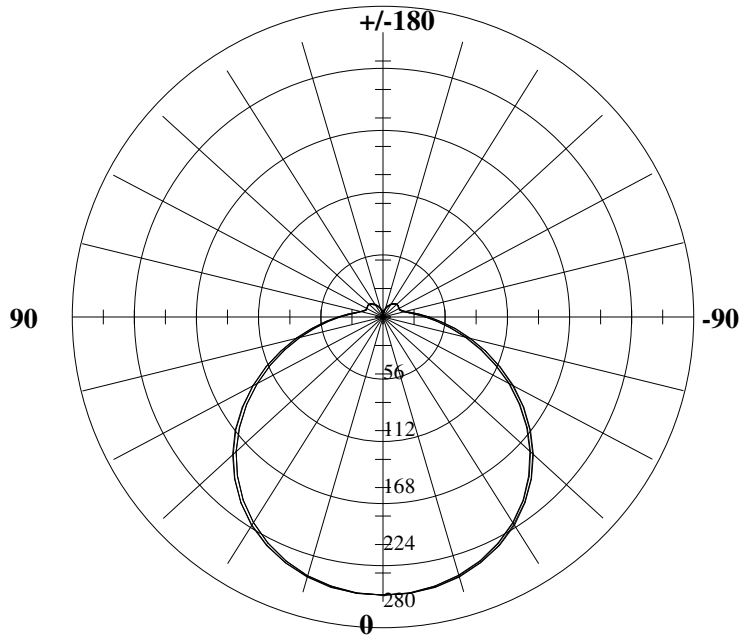


# RP Lighting • Fans

## ISO-Candela V-H [Unit :cd] 4336-15

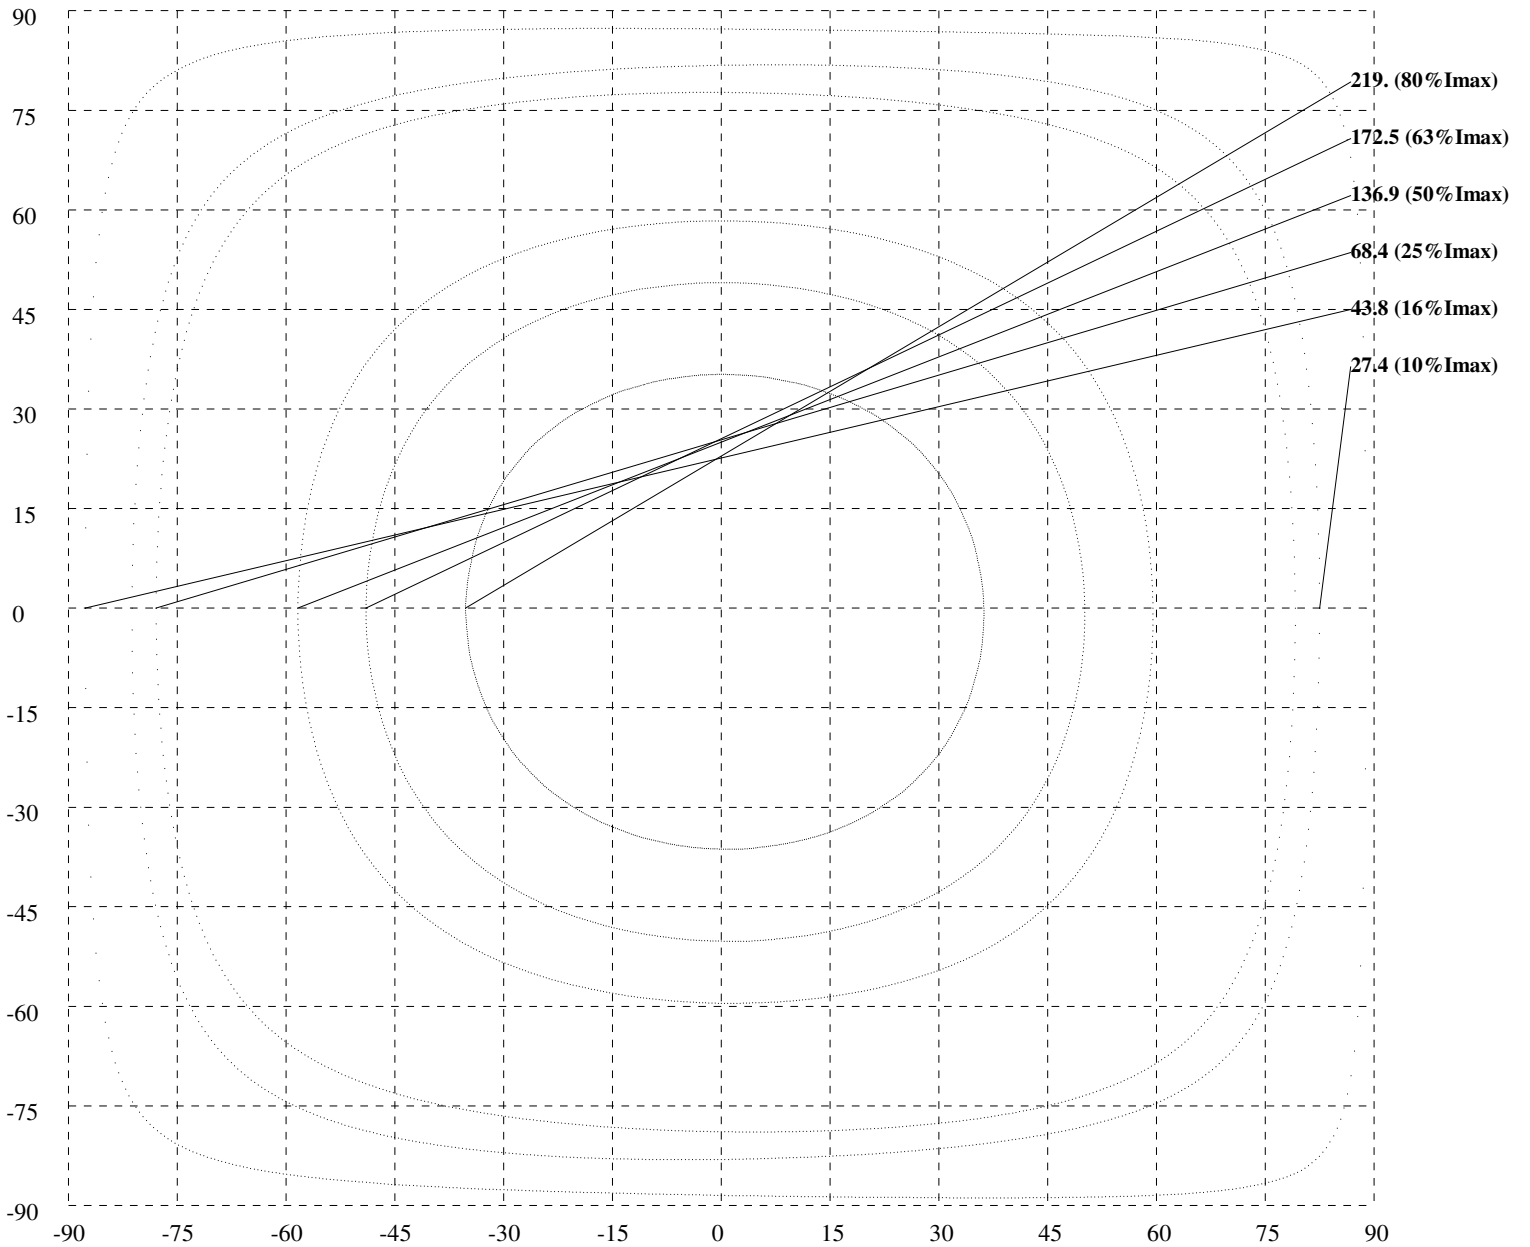

# RP Lighting • Fans

## Iso-Lux [Unit :lx] 4336-15

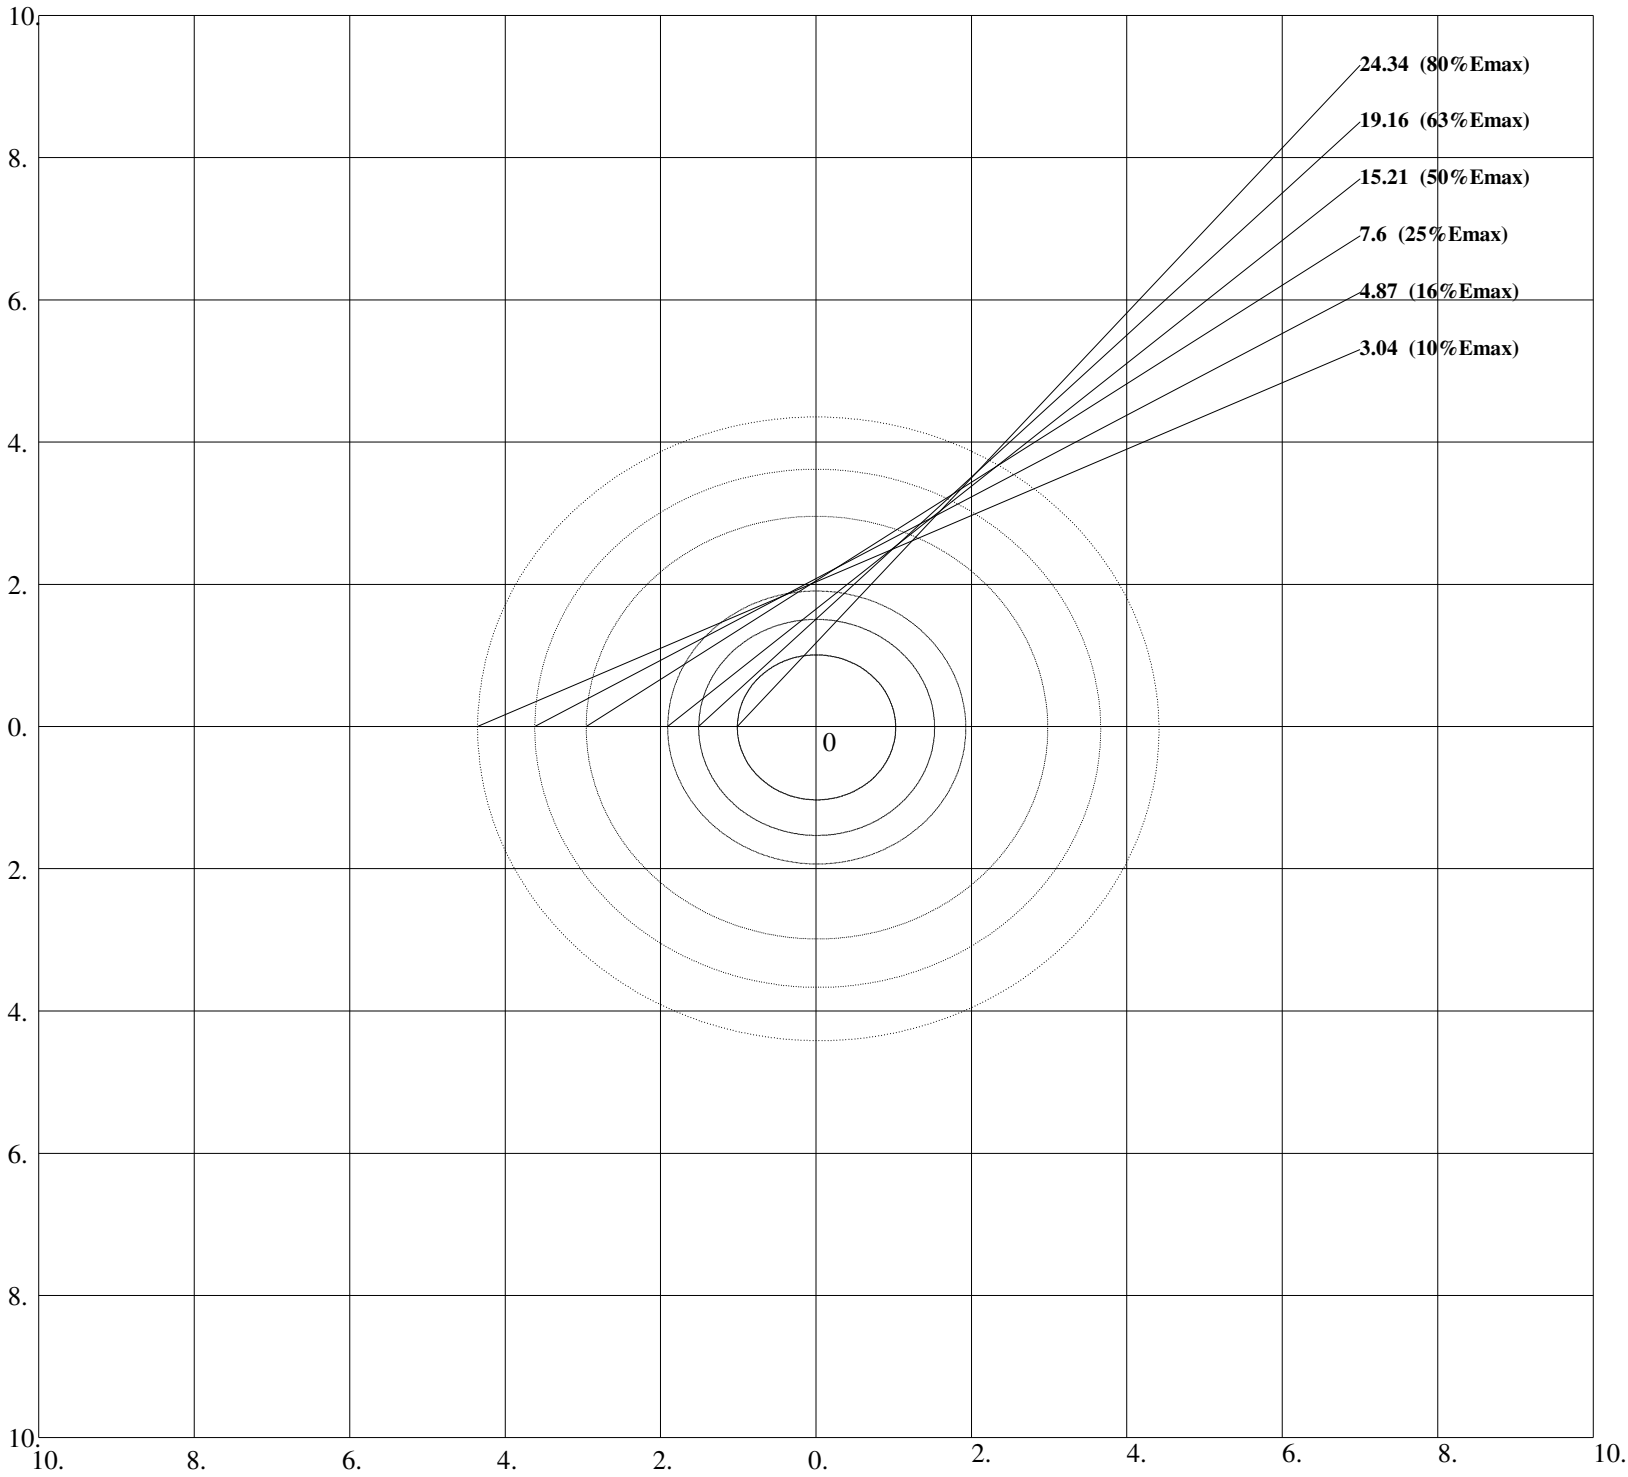

Units: lx  
Height: 3 m  
Max Illuminance : 30.42lx

# RP Lighting • Fans

## Lux-Distance Curve

