


# 4336, 4337, 4338

120V

Catalog #:		Type
Project:		Date
Prepared by:		

## LED Ceiling Mount

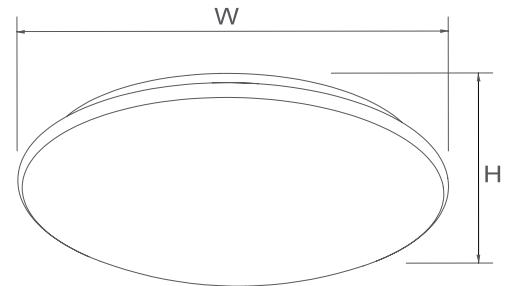

LED Ceiling Mount

### DESCRIPTION

The understated look of this LED Ceiling Mount is designed for easy installation and the simple aesthetics make it a great addition to any room.

### DESIGN FEATURES

#### Construction

- Durable steel construction

#### Electrical

- 120V AC- Driver on Board
- 10-100% Triac dimmable
- Damp Location Listed
- 50,000 hour projected life
- Available in 3000K

#### Lens

- Acrylic lens protects LEDs and diffuses glare while allowing for optimum lumen output

#### Installation

- Quick and easy, one-person installation

#### Finish

- Available in white (WH) with an acrylic lens

#### Certifications

- Energy Star
- CSAus listed for damp locations
- 5 year limited warranty



TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

# 4336, 4337, 4338

120V

Model #	Dimensions (Dia x H)	Watts	Lumens	Efficiency	CCT	Power Factor	CRI	Beam Angle
4336	11-4/5" x 3-1/2"	15.7W	949lm	60.4	3000K	0.98	93	114°
4337	14-3/16" x 4-1/8"	23.2W	1375lm	59.3	3000K	0.98	94	106°
4338	16-1/2" x 4-1/2"	34.5W	2050lm	59.4	3000K	0.98	93	105°

## ORDERING

Example: 4313-WH-3K

Model #	Finish	CCT
4336, 4337, 4338		-3K
4336 4337 4338	: WH : White	-3K : 3000 K

LED Ceiling Mount