


# 4417, 4418

120V-60Hz

Catalog #:		Type
Project:		Date
Prepared by:		

## LED Outdoor Wall Mount

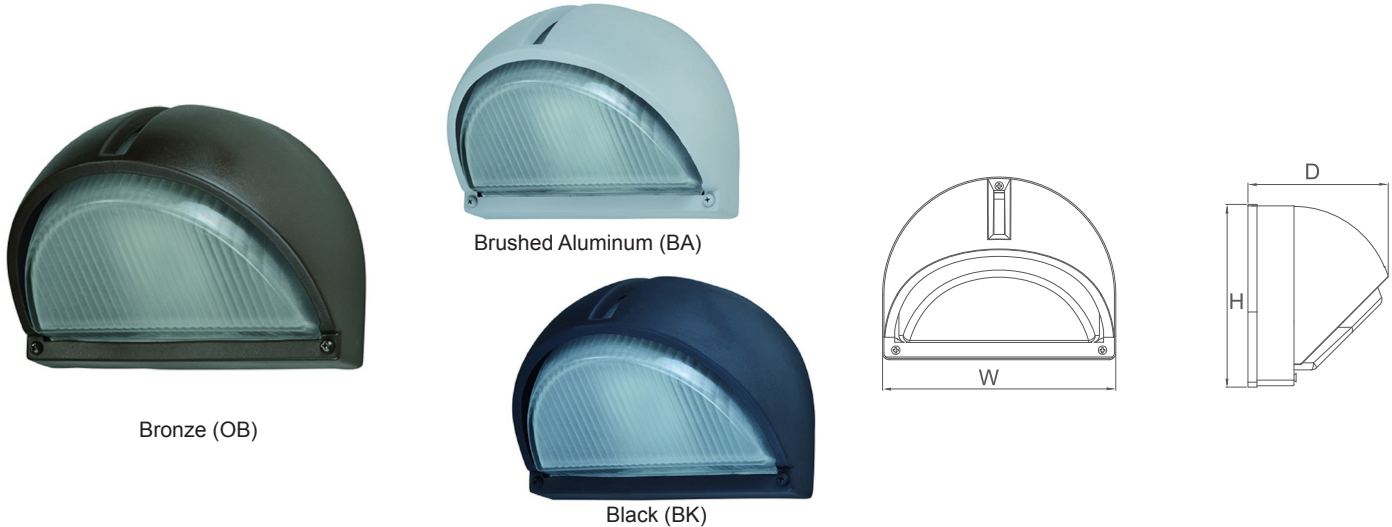

LED Outdoor Wall Mount

### DESCRIPTION

The 4417 LED Outdoor Wall Mount is the ideal choice for outdoor applications for building-mounted doorway and pathway illumination. The integrated LEDs mean that you never need to change a bulb.

### DESIGN FEATURES

#### Construction

- Made with die-cast aluminum with glass lens

#### Electrical

- 120V-60Hz
- 50,000 hour projected life
- Available in 3000K
- CRI 80
- Power Factor: 0.96
- 4417:** 20W | 1496lms | 74.8lms/W
- 4418:** 12W | 885lms | 73.8lms/W
- Operating temperature 5°F (-15°C) to 104°F (40°C)
- Wet location listed
- Beam angle of 110°

#### Installation

- Wall mount for use in outdoor applications

#### Finish

- Available in black (BK), brushed aluminum (BA), or oil rubbed bronze (OB)

#### Dimensions ( W x H x D )

- 4417:** 8-1/2" x 6-1/8" x 4-1/2"
- 4418:** 6-1/2" x 5-1/8" x 4"

#### Certifications

- ETLus Certified for Wet Locations
- Energy Star
- 5 year limited warranty

### ORDERING

Example: 4417-BA

Model #	Finish
4417	BA
4418	OB
	BK
	Brushed Aluminum
	Oil Rubbed Bronze
	Black

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

