


9253 Series

120V-60Hz

Catalog #:		Type
Project:		Date
Prepared by:		

USB Charger & Tamper-Resistant Receptacle

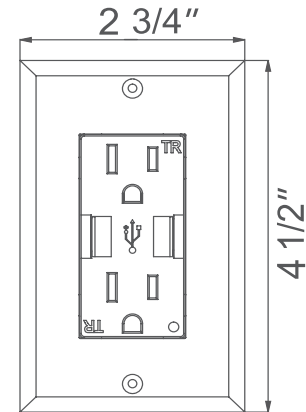

DESCRIPTION

This USB Charger & Tamper-Resistant Receptacle has the ability to detect when a ground fault may occur. When it does detect the ground fault, it shuts off the flow of electricity to deter potential accidents.

DESIGN FEATURES

Construction

- Back and side wired for easy installation
- Matching color wall plate included

Electrical

- USB 2-ports charge multiple portable devices
- Compatible with USB 1.1/ 2.0/ 3.0
- Activated doors keep USB ports protected
- Green LED indicator shows USB power functionally
- Temper-resistant outlets built-in safety protection
- Input 125VAC 60Hz
- 3.1A charging capacity
- 15A Tamper-resistant outlets

Dimensions

- Height 4-1/2" x Width 2-3/4"

Finish

- Available in white

Certifications

- Meets UL943, cUL (CSA C22.2 NO.144), UL498 for receptacle
- UL, cUL listed
- Limited 2 Year Warranty

ORDERING

Example: 9253WW

Model #	Finish
9253	
9253	WH : White

