


REL22 Series

120/277V AC

Catalog #:		Type
Project:		Date
Prepared by:		

Compact HO Remote Head Capable Emergency - Narrow Lens

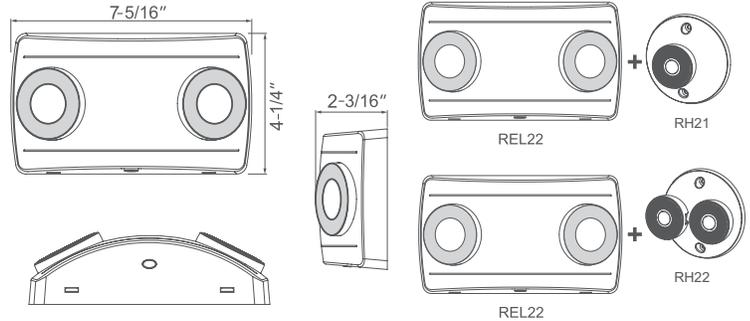

DESCRIPTION

Simple and compact, this high output emergency unit is versatile with a narrow lens and allows for additional remote heads to be connected for a wider range of applications.

DESIGN FEATURES

Construction

- Injection molded thermoplastic ABS housing with 5VA flame retardant
- Adjustable clear lens heads

Electrical

- 120/277V AC dual voltage - 60 HZ
- Standard Operating Temperature: 10°C (50°F) to 40°C (104°F)
- 2 Adjustable 1.4W LED Heads | 247 lms total
- 3.6V, 1500 mAh, rechargeable Ni-Mh battery
- 3.6V, 1W or 3.6V, 2W Remote Heads Available
- 48 hour recharge after 90 minute discharge
- Manual test switch and LED indicator on bottom of unit
- 90 minutes of illumination in case of power failure

Remote Head Compatibility

- RH17 - Single Wet Remote Head | 1 x 1W
- RH19 - Single Wet Remote Head | 1 x 1W
- RH21 - Single Wide Lens Remote Head | 1 x 1W
- RH21-N - Single Narrow Lens Remote Head | 1 x 1W
- RH22 - Double Wide Lens Remote Head | 2 x 1W
- RH22-N - Double Narrow Lens Remote Head | 2 x 1W

Installation

- Suitable for ceiling and wall mount over standard recessed J-Box configuration
- Top and side knockouts for conduit applications

Certifications

- UL Listed for damp location to UL924 standards
- Meets and exceeds all appropriate NFPA life safety codes
- LED Light Source: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

ORDERING GUIDE

Example: REL22-N

Model #	Options
REL22	-N
REL22	-N : Narrow lens

Refer to REL22-1 Spec Sheet for Wide Lens unit

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

7/29/22 R3



LED Light Source

Other Components



RP LIGHTING · FANS

REL22 Series

120/277V AC

Spacing Diagram

