

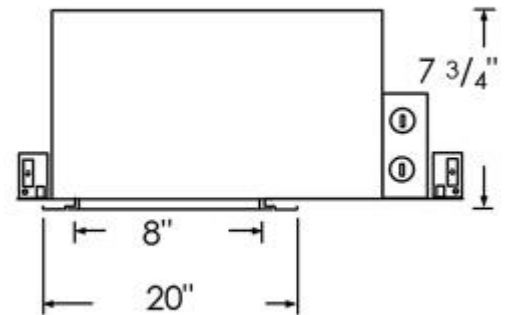


RP




LIGHTING • FANS

Type:
Project:
Comments:
Prepared By:

Part #	8130HIC-Exx (non dimmable) 8130HIC-Dxx (dimmable)
EM option	8130HIC-EM (emergency)
Description:	8" Horizontal compact fluorescent housing
Design Features	
Thermal Protection	Protected against misuse of insulation and improper wiring
Bar hangers	Pre installed allowing for position at any point w/in a 24" joist span. Can be turned 90° on plaster frame, & to fit T-bar spine w/out additional clamps for use in drop ceilings.
IC rating	IC rated for direct contact with non cellulose insulation
Nails	Pre installed captive nails on bar hangers
J Box	Listed for feed through wiring (4 in-4 out) and five ½" knockouts & four non metallic cable knockouts w/ strain clamps
Connectors	3-port quick connectors
Lamp	Horizontally mounted DTT (Double twin tubes or TT)
Wattage	18W, 26W, 32W, 42W
Ballast	HPF (High power factor) electronic for 4-pin type
Voltage	120/277V
Listing	
ETL/UL	cULus for damp location



CONTACT US- Toll Free: 1-800-937-6925 Fax: 1-888-207-9509 or visit our website at www.rplighting.com

	Type	Item#		
	Reflector, Anodized	8591	White and Clear	9 1/2"
	Reflector, Clear w/White Baffle and Fresnel Lens	8595	White	9 1/2"

Additional Information

1. Adjusts to fit up to 1" ceiling thickness.
2. 7-3/4" height allows for use in 2"x8" joist construction.
3. Optional Emergency option backup unit provides 90 minutes of illumination when normal power source fails.