


8115HA

120V-277V Universal Voltage

Catalog #:		Type
Project:		Date
Prepared by:		

6" LED IC Airtight Frame-In

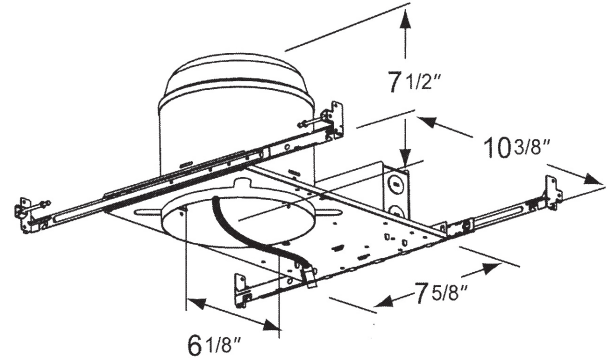

6" LED IC Airtight Frame-In

DESCRIPTION

An ideal solution for efficiency, safety, and flexible design aesthetics. The 8115HA LED new construction housing is for use in shallow ceilings where 2" x 8" joist constructions is used and can be in direct contact with ceiling insulation. This 8115HA balances efficiency and cost to bring you the options needed to complete a variety of residential or commercial projects with a reliable and modern LED down light solution.

DESIGN FEATURES

Electrical

- Voltage: 120V with 120V trims
- Voltage: 277V with 277V trim
- Dimmable compatible with conventional dimming systems
- Suitable for use in damp locations, wet locations when used with 8563, 8523, and 8568 trims
- Trims include E-26 socket adapter for retro fit use

Housing

- Sturdy aluminum construction
- Suitable for use in new construction applications
- Adjusts to accommodate 1" ceiling thickness
- IC Rated for direct contact with batt type fiberglass insulation
- 7-1/2" height allows use in 2" x 8" joist construction

Junction Box

- J-Box is listed for through-branch circuit wiring (4 in - 4 out) and seven 1/2" knockouts and four nonmetallic cable knockouts with strain clamps
- 3 port quick connectors pre-installed in J-box

Bar Hanger

- Pre-installed bar hangers allow the housing to be positioned at any point within a 24" joist span
- Bar hangers can be turned 90° on the plaster frame
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings
- Pre-installed captive nails on bar hangers

Dimensions

- 10-3/8" x 7-5/8" x 7-1/2"
- Aperture: 6-1/8"

Options

- -EM adds Emergency Backup

Certifications

- 5 year limited warranty
- cETLus for wet location
- Meets Washington State energy code for restricted air flow requirements



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.


8115HA

120V-277V Universal Voltage

Specification & Ordering

HOUSING

Example: 8115HA-EM

Housing #	
	8115HA
	8115HA -EM : EM adds Emergency Backup

MODULE/TRIM

Example: 8523WH-90-3K

Module/Trim #	Finish	Color Rendering	CCT	Voltage
 WET	8523			
8523 5/6" 850lms 12.5W Baffle	WH : White BK : Black OB : Oil Rubbed Bronze BN : Brushed Nickel	-90 : 90CRI	-3K : 3000K -4K : 4000K	-120 : 120V

MODULE/TRIM

Example: 8562WH-80-3K

Module/Trim #	Finish	Color Rendering	CCT	Voltage
	8562			
8562 6" 900lms 13W Gimbal	WH : White BK : Black OB : Oil Rubbed Bronze BN : Brushed Nickel	-80 : 80CRI	-3K : 3000K	-120 : 120V

MODULE/TRIM

Example: 8563WH-90-3K

Module/Trim #	Finish	Color Rendering	CCT	Voltage
 WET	8563			
8563 6" 795lms 13W Reflector	WH : White BK : Black OB : Oil Rubbed Bronze BN : Brushed Nickel CL : Clear	-90 : 90CRI	-3K : 3000K -4K : 4000K	-120 : 120V -277 : 277V

ORDERING GUIDE

Example: 8568WH-90-3K

Model #	Finish	CRI	CCT
 WET	8568	-90	
8568 6" LED Baffle Trim with Lens; 17W, 1240 lms	BK : Black OB : Oil Rubbed Bronze CL : Clear WH : White	-90 : 90 CRI	-3K : 3000K* -4K : 4000K

* Not available in Clear (CL)

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

10/2/2020 R1