


8115HRA

120V-277V Universal Voltage

Catalog #:		Type
Project:		Date
Prepared by:		

6" LED IC Airtight Remodel

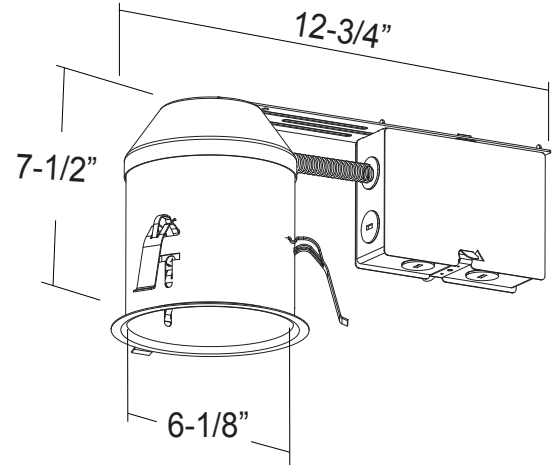

DESCRIPTION

An ideal solution for efficiency, safety, and flexible design aesthetics. The 8115HRA LED remodel housing is for use in shallow ceilings where 2"x8" joist construction is used and can be in direct contact with ceiling insulation. This 8115HRA balances efficiency and cost to bring you the options needed to complete a variety of residential or commercial projects with a reliable and modern LED down light solution.

DESIGN FEATURES

Electrical

- Voltage: 120V with 120V trims
- Voltage: 277V with 277V trim
- Suitable for use in wet location and feed through wiring
- Dimmable compatible with conventional dimming systems
- Suitable for use in damp locations, wet locations when used with 8563, 8523, and 8568 trims
- Trims include E-26 socket adapter for retro fit use

Housing

- Sturdy aluminum construction
- Suitable for use in remodel applications
- Adjusts to accommodate various ceiling thickness
- IC Rated for direct contact with batt type fiberglass insulation
- 7-1/2" height allows use in 2" x 8" joist construction

Junction Box

- J-Box is listed for through-branch circuit wiring (4in - 4out) and eight 1/2" knockouts and four non-metallic cable knockouts with strain relief clamps
- 3-port quick connectors pre-installed in J-box

Dimensions

- 12-3/4" x 6-1/8" x 7-1/2"
- Aperture: 6-3/8"

Certifications

- 5 year limited warranty
- cETLus for wet location
- Meets Washington State energy code for restricted air flow requirements



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

8115HRA

120V-277V Universal Voltage

Specification & Ordering

HOUSING

Example: 8115HRA

Housing #	
	8115HRA
	8115HRA

MODULE/TRIM

Example: 8523WH-90-3K

Module/Trim #	Finish	Color Rendering	CCT	Voltage
 WET	8523			
	8523 5/6" 850lms 12.5W Baffle	WH : White BK : Black OB : Oil Rubbed Bronze BN : Brushed Nickel	-90 : 90CRI -3K : 3000K -4K : 4000K	-120 : 120V

MODULE/TRIM

Example: 8562WH-80-3K

Module/Trim #	Finish	Color Rendering	CCT	Voltage
	8562			
	8562 6" 900lms 13W Gimbal	WH : White BK : Black OB : Oil Rubbed Bronze BN : Brushed Nickel	-80 : 80CRI -3K : 3000K	-120 : 120V

MODULE/TRIM

Example: 8563WH-90-3K

Module/Trim #	Finish	Color Rendering	CCT	Voltage
 WET	8563			
	8563 6" 795lms 13W Reflector	WH : White BK : Black OB : Oil Rubbed Bronze BN : Brushed Nickel CL : Clear	-90 : 90CRI -3K : 3000K -4K : 4000K	-120 : 120V -277 : 277V

MODULE/TRIM

Example: 8568WH-90-3K

Module/Trim #	Finish	Color Rendering	CCT	Voltage
 WET	8568			
	8568 6" 1240lms, 17W Module/Baffle Trim High Output	WH : White BK : Black OB : Oil Rubbed Bronze CL : Clear	-90 : 90CRI -3K : 3000K -4K : 4000K	-120 : 120V -277 : 277V

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.