


8215HA Series

120V-60Hz

Catalog #:		Type
Project:		Date
Prepared by:		

4" LED IC Airtight Frame-In

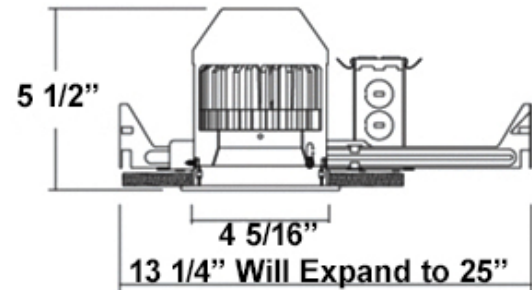

DESCRIPTION

This 8215HA Series is an ideal solution for efficiency, safety, and flexible design aesthetics. This new construction housing is for use in shallow ceilings where 2" x 6" joist constructions is used and can be in direct contact with ceiling insulation. Balances efficiency and cost to bring you the options needed to complete a variety of residential or commercial projects with a reliable and modern LED down light solution.

DESIGN FEATURES

Electrical

- Dimmable compatible with conventional dimming systems
- Trims include E-26 socket adapter for retro fit use

Housing

- Sturdy steel construction
- Suitable for use in new construction applications
- IC Rated for direct contact with batt type fiberglass insulation
- Thermally protected against improper lamping
- 5-9/16" height allows use in 2" x 6" joist construction
- Adjusts to accommodate up to 1" ceiling thickness

Junction Box

- J-Box is listed for through-branch circuit wiring (4in - 4out) and seven 1/2" knockouts
- 3 port quick connectors pre-installed in all J-boxes

Bar Hanger

- Pre-installed bar hangers allow the housing to be positioned at any point within 24" joist span
- Pre-installed captive nails on bar hangers
- Bar hangers can be turned 90° on the plaster frame
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings

Dimensions

- Size: H 5 1/2" x L 13 1/4" will expand to 25"
- Aperture: 4 5/16"

Options

- -EM adds Emergency Backup

Certifications

- cCSAus listed for damp location and feed through wiring
- Meets Washington State energy code for restricted airflow requirements
- 5 year limited warranty

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

8/31/2020 R1



RP LIGHTING • FANS


8215HA Series

120V-60Hz

Specification & Ordering

HOUSING

Example: 8215HA-EM

Housing #		Emergency Backup	
	8215HA		
	8215HA	-EM	: EM adds Emergency Backup


ORDERING GUIDE

Example: 8763WH-90-3K

Model #	Finish	CRI	CCT
 WET	8763	-90	
	8763 4" Recessed LED Module Reflector 90 CRI 120V O.D. 5"	BN : Brushed Nickel BK : Black OB : Oil Rubbed Bronze CL : Clear WH : White	-90 : 90CRI, 10W, 600lms -3K : 3000K -4K : 4000K

ORDERING GUIDE


Example: 8769WH-90-3K

Model #	Finish	CRI	CCT
	8769		-3K
	8769 4" Recessed LED Module Baffle 120V, O.D. 5"	BA : Brushed Aluminum BK : Black ¹ OB : Oil Rubbed Bronze ¹ WH : White	-80 : 80CRI, 10W, 889lms -90 : 92CRI, 10W, 710lms -3K : 3000K

1 - Only available in -80 CRI

ORDERING GUIDE

Example: 8770CL-90-3K

Model #	Finish	CRI	CCT
	8770	CL	-3K
	8770 4" Recessed LED Module Clear/white trim ring 120V, O.D. 5"	CL : Clear	-80 : 81CRI, 10W, 889lms -90 : 90CRI, 10W, 710lms -3K : 3000K

8215HA Series

120V-60Hz

Specification & Ordering

ORDERING GUIDE

Example: 8771WH-90-3K

Model #	Finish	CRI	CCT
 <p>8771 4" Recessed LED Gimbal Module 120V, O.D. 5"</p>			
	BN : Brushed Nickel ¹ OB : Oil Rubbed Bronze ¹ WH : White	-80 : 80 CRI, 895 lms -90 : 90 CRI, 717 lms	-3K : 3000K -4K : 4000K

1 - Only available in -90-3K

ORDERING GUIDE

Example: 8722WH-90-3K

Model #	Finish	CRI	CCT
 <p>8722 4" LED Module/ Retrofit Trim 120V, O.D. 5-1/6"</p>	WH	-90	-3K
	WH : White	-90 : 90 CRI, 650 lms	-3K : 3000K

ORDERING GUIDE

Example: 8773WH-90-3K

Model #	Finish	CRI	CCT
 <p>8773 LED Recessed Square Retrofit-Kit 120V, O.D. 5-1/8"</p>	WH	-90	
	WH : White	-90 : 90 CRI, 700 lms	-3K : 3000K -4K : 4000K

*Oil Rubbed Bronze (OB) and Brushed Nickel (BN) available by special order

4" LED IC Airtight Frame-In