

INSTALLATION INSTRUCTIONS

LED PENDANT Model No.#4430

120VAC Input, Dimmable

READ AND FOLLOW SAFETY INFORMATION

Turn off the main power at the circuit breaker before installing and servicing the fixture to prevent possible injury from electric shock.

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

INSTALLATION & ASSEMBLY

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.


1. Thread the 8/32 hex nut(9) onto the fixture screw(8), and screw the fixture screw(8) into the mounting bracket(3), without tightening the hex nut.
2. Pull the power supply wires out from the outlet box(1). Attach the mounting bracket (3) to the outlet box with two mounting screws(2). The side of the mounting bracket marked "GND" must face out.
3. Make wire connections, connect the black supply wire (5) to black fixture wire (11), white supply wire (4) to white fixture wire(10).
- Connect the fixture ground wire(12) to supply ground wire(6) with wire nut (7). Wrap all wire connections with electrical tape for secure connection.
4. After wires are connected, tuck them carefully inside the outlet box. Place ceiling canopy (13) over the outlet box and feed fixture screws (8) through two holes of ceiling canopy until protrude from ceiling canopy approximately 1/4" and secure with two cap nuts(14).
5. Attach glass shade(15) onto the holder, and securely fastened the glass shade with retaining cap(16).
6. Installation complete, restore power at the circuit breaker and turn light switch on to activate this fixture.

Dimming- This product is compatible with most common residential type dimmers, dimming performance depends on dimmers.

Recommended Dimmers: Lutron MACL-153M, DVL-153P, SCL-153P,
Leviton IPL06-10Z, 6674-POW

Care and maintenance – Use a clean, soft cloth to wipe the surface of the fixture.
DO NOT use any cleaners with chemicals, solvents or harsh abrasives

Replacement- This LED product has no bulb to replace.

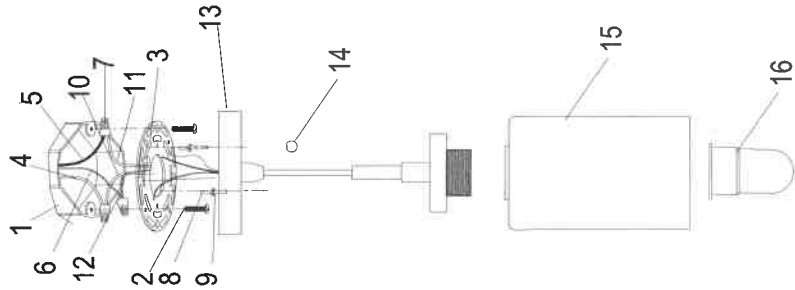

1. OUTLET BOX (NOT INCLUDED)
2. MOUNTING SCREW
3. MOUNTING BRACKET
4. WHITE SUPPLY WIRE
5. BLACK SUPPLY WIRE
6. SUPPLY GROUND WIRE
7. WIRE NUT
8. #8-32 FIXTURE SCREW
9. #8-32 HEX NUT
10. WHITE FIXTURE WIRE
11. BLACK FIXTURE WIRE
12. FIXTURE GROUND WIRE
13. CEILING CANOPY
14. CAP NUT
15. GLASS
16. RETAINING CAP

FIVE YEAR WARRANTY - RP Lighting warrants this product to be free from defects in material and workmanship for five years from the original date of purchase by the consumer. This warranty is limited to the counter replacement at the time of purchase with the original receipt.

We will not be liable for the loss or damage of any kind, incidental or consequential damages of any kind, whether based on or negligence and arising in connection with the sale, use or repair of the product claimed to be defective.

Some states do not allow the exclusion or limitation of incidental or consequential damages so above limitation may not apply to you. This warranty gives you specific legal right and you may also have other rights, which vary from state to state. Misuse, improper installation, accidental installation or maintenance will void warranty.