


4432

Universal Voltage: 120-277V

| | | |
|--------------|--|------|
| Catalog #: | | Type |
| Project: | | Date |
| Prepared by: | | |

Adjustable LED Full-Cutoff Wall Pack

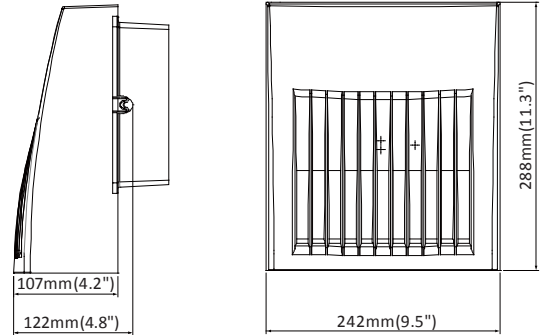

80Watt
11.3" x 9.5" x 4.8"

DESCRIPTION

Increase safety and security outside your building with the adjustable LED full-cutoff wall pack. A modern, minimal design, durable die-cast aluminum construction, and wet location rating make this an ideal wall pack for almost any application.

DESIGN FEATURES

Construction

- Fully sealed, durable die-cast aluminum
- Clear acrylic lens for optimum lumen output

Electrical

- Universal Voltage: 120-277V
- Built-in photocell - Auto "on" at night | Auto "off" at daylight
- Operating temperature: -4°F (-20°C) to 104°F (40°C)
- 4432-80: 80W | 8404 lms | HID Equivalent - 350W
- 4000K | 80 CRI
- 100° beam angle

Installation

- Wall mount

Certifications

- ETLus for wet location
- DLC Certified
- LED Light Engine: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

ORDERING GUIDE

Example: 4432OB-80-4K

| Model # | Finish | Watts | CCT |
|---------|------------------------|-----------|-------------|
| 4432 | OB | -80 | -4K |
| 4432 | OB : Oil Rubbed Bronze | -80 : 80W | -4K : 4000K |

Refer to 4432-1 spec sheet for new model



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

2/28/22 R2



4432 - LED Full-Cutoff Wall Pack