


REL6

120V-277V Universal Voltage

Catalog #:		Type
Project:		Date
Prepared by:		

Indoor High-Lumen Emergency

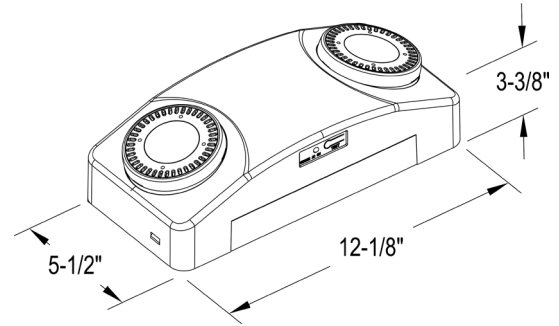

Indoor High-Lumen Emergency

DESCRIPTION

An ultra slim profile, that comes in a standard or high output design with self-diagnostics and self-testing - make this one small emergency light, with lots of big features. The modern design is an attractive way to provide emergency lighting that increases safety, security, and visibility in commercial and industrial applications.

DESIGN FEATURES

Construction

- Fire-rated thermoplastic housing
- Low-profile design with adjustable heads

Electrical

- 120V-277V Universal Voltage, class 2 driver
- Test switch and charge indicator light
- Long-life, maintenance-free, rechargeable high temperature 9.6V Lithium battery
- 24 hours recharge after 90 minutes discharge
- Long-life LEDs and electrical driver
- 50,000 hour projected life
- Available in 5000K
- Standard: 5.4W | 520lms
- High-lumen: 10W | 1100lms
- 3.6V 2W remote capability (RH21) and 3.6V 4W (RH22) remote capabilities are available | for wet location 2.7~7.3V 1W (RH17) or 2.7~7.3V 2x1W (RH18)

Installation

- Suitable for wall mount and conduit mount
- Removable backplate for easy, one-person installation
- Universal pattern knockouts on backplate for J-box

Dimensions (W x D X H)

- 12-1/8" x 3-3/8" x 5-1/2"

Finish

- Available in white (WH)

Certifications

- UL/cUL listed for damp locations
- 5 year limited warranty



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

REL6

120V-277V Universal Voltage

Specification & Ordering


Model #	Dimensions (W x D X H)	Watts	Lumens	Finish
REL6LED-WH Standard	12-1/8" x 3-3/8" x 5-1/2"	5.4W	520lms	White
REL6LED-WH-SD Self-diagnostic				
REL6LED-WH-HO High output		10W	1100lms	
REL6LED-WH-HO-SD High output, Self-diagnostic				

ORDERING


Example: REL6LED-WH-SD

Model #	Finish #	Lens
REL6LED		
REL6LED	-WH : White	<ul style="list-style-type: none"> -SD : - Standard -SD : - Self-diagnostic -HO : - High output -HO-SD : - High output, Self-diagnostic

REL6LED-WH

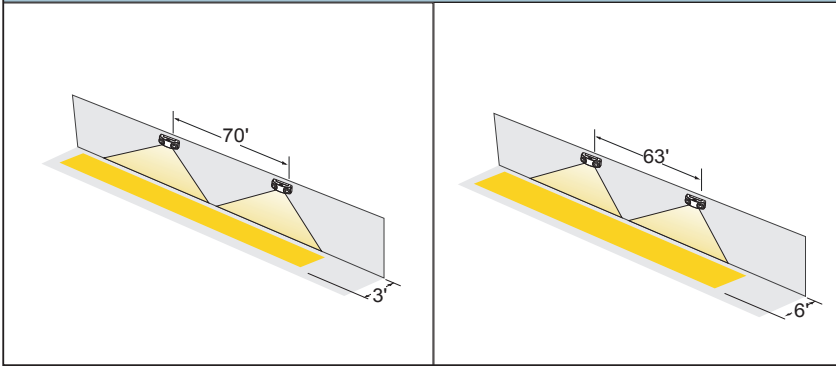

REL6LED-WH-HO

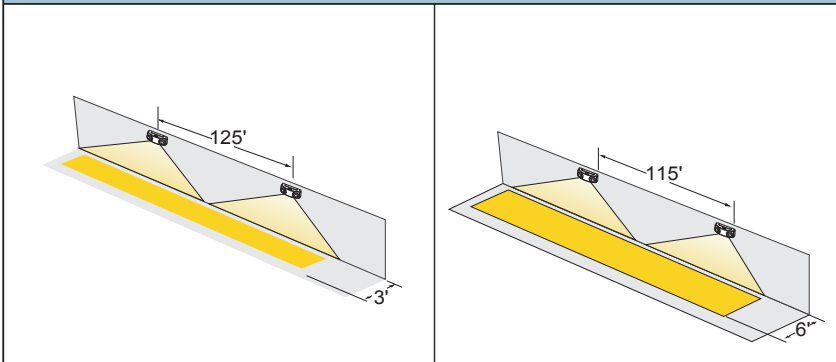

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.