


# 8642

120V

Catalog #:		Type
Project:		Date
Prepared by:		

## 8" LED Ultra-Thin Light

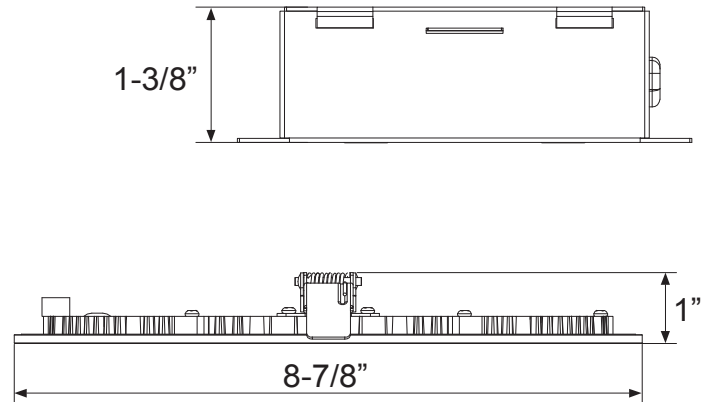

### DESCRIPTION

A versatile LED down light solution with edge-lit technology and an off-board driver allow for an ultra slim profile and flexible mounting options. Installation is a snap with the plenum-rated driver box and linkable connector cable — there is no need for a j-box or recessed housing. The simple spring-loaded retention tabs securely hold each downlight snug to the ceiling.

### DESIGN FEATURES

#### Construction

- Ultra slim profile
- Durable aluminum construction
- Frosted acrylic lens diffuses glare and maximizes output

#### Electrical

- 120V-60Hz
- Dimmable TRIAC or ELV, 10-100%
- 50,000 hour projected life
- 120° Beam Angle
- 18W | 1150 lms (delivered)
- 3000K or 4000K | 90 CRI

#### Installation

- Simple installation with hinged, off-board driver/ junction box, poke-in connectors, and linkable connector cable
- Spring-loaded retention tabs hold downlight snug to ceiling surface
- IC Rated for direct contact with batt type fiberglass insulation

#### Finish

- Available in White

#### Certifications

- cETLus listed for wet location
- Energy Star Listed
- IC Rated
- LED Light Source: 5 year limited warranty
- Other Components: 1 year limited warranty

IC  
RATED



TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

1/6/22 R1

# 8642

120V

## Specification & Ordering

### ORDERING

Example: 8642WH-90-3K

Model #	Finish	CRI	CCT
8642			
8642	WH : White	-90 : 90 CRI	-3K : 3000K -4K : 4000K

# IC RATED

8642 - 8" LED Ultra-Thin Light