



Vol. 2.0 Lighting & Fan Supplement



RP

LIGHTING • FANS



Catalog Supplement









RP Lighting + Fans is committed to continuously expanding its catalog of high-quality, value-priced, energy efficient products that your customers are asking for. This Vol. 2.0 Supplement updates our extensive line of LED lighting fixtures and our broad family of fans that have been added since the printing of our last full-volume catalog.

Please see www.rplighting.com for the most current and up-to-date product information.





Sections

	Recessed Lighting.....	4 - 16
	Decorative Collection.....	17 - 25
	Other New Items	26
	Wall Mount / Ceiling Mount Lighting.....	27 - 28
	Track Lighting.....	29
	Linear Lighting.....	30
	Step Lighting	31
	Exit & Emergency Lighting.....	32 - 34
	Ceiling Fan	35 - 53

Items not in this catalog are available by special order and have a longer lead time; please contact your local sales representative for more information. All products, product specifications, dimensions and data are subject to change without notice – check the latest updates on our website or consult with RP Lighting • Fans.

NEW

Recessed LED Housings & Trims


Energy Saving options for any
room in your home or office.



8320H

2" Round Frame-In LED

120V-277V Universal Voltage

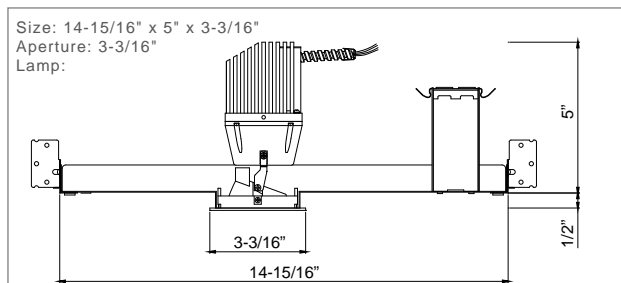

Features

Electrical

- 120V-277V Universal Voltage
- TRIAC and 0-10V dimmable driver
- High efficiency center beam options
- 50,000 hour projected life
- Available in 80 CRI

Housing

- Adjustable trims may be directional 0-30° tilt and 356° rotational precision adjustment with position lock
- Interchangeable optics for beam spread of N: 15°, M: 38°, W: 60°
- Module can be used without the frame in retrofit applications

Junction Box

- Listed for through branch circuit wiring (4in-4out) with five (5) 1/2" knockouts and 4 non metallic cable knock outs with strong clamps
- 3-port quick connectors pre-installed in J-Box

Bar Hanger

- Pre-installed bar hangers are designed to fit "T" bar spine without additional clamps for use in drop ceilings
- Adjustable to position the housing at any point within a 24" joist span or grid section
- 4 captive nails for quick placement

Certifications


- cCSAus Listed for damp location

Trims For 8320H

8861AJ-WH




30° Angle reflector cone
O. D. 3-3/16"



8861S-WH



Straight reflector cone
O. D. 3-3/16"




Housing	Wattage/Lumen	Color Temp	Beam Spread	Emergency
8320H	10 870lms	27 2700K	-15N N:15°	EM adds Battery Pack
	15 1200lms	30 3000K	-38M M:38°	
	23 1800lms		-60W W:60°	



8321H

2" Square Frame-In LED

120V-277V Universal Voltage

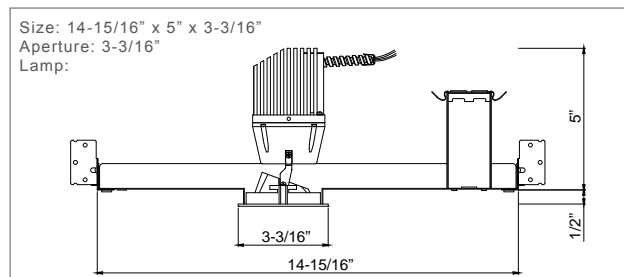

Features

Electrical

- 120V-277V Universal Voltage
- TRIAC and 0-10V dimmable
- High efficiency center beam options
- 50,000 hour projected life
- Available in 80 CRI

Housing

- Adjustable trims may be directional 0~30° tilt and 356° rotational precision adjustment with position lock
- Interchangeable optics for beam spread of N: 15°, M: 38°, W: 60°
- Module can be used without the frame in retrofit applications

Junction Box

- Listed for through branch circuit wiring (4in-4out) with five (5) 1/2" knockouts and 4 non metallic cable knock outs with strong clamps
- 3-port quick connectors pre-installed in J-Box

Bar Hanger

- Pre-installed bar hangers are designed to fit "T" bar spine without additional clamps for use in drop ceilings
- Adjustable to position the housing at any point within a 24" joist span or grid section
- 4 captive nails for quick placement

Certifications


- cSAUS Listed for damp location

Trims For 8321H

8862AJ-WH




Adjustable 0-30° tilt
O. D. 3-3/16"



8862S-WH



Straight fixed lamp
O. D. 3-3/16"



Housing	Wattage/Lumen	Color Temp	Beam Spread	Emergency
8321H	10 870lms	27 2700K	-15N N:15°	EM adds Battery Pack
	15 1200lms	30 3000K	-38M M:38°	
	23 1800lms		-60W W:60°	



8199HICA-FR

6" LED Fire Rated Emergency Airtight
Frame-In

120V/277V



Features

Electrical

- 120V/277V, 60HZ

Housing

- Galvanized steel construction; housing interior is comprised of a flexible non-combustible insulation
- Suitable for use in new construction applications
- IC Rated for direct contact with insulation
- Adjusts to accommodate up to 1-1/2" ceiling thickness
- 2-hours fire rated

Junction Box

- J -box is listed for through-branch circuit wiring (4in —4out), with three 1/2" knockouts and four non-metallic cable knockouts with strain clamps
- 3-port quick connectors pre-installed in J-Box

Bar Hanger


- Pre-installed bar hangers allow the housing to be positioned at any point within 24" joist span
- Pre-installed captive nails on bar hangers
- Bar hangers can be turned 90° on the plaster frame
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings

Certifications

- Energy Star approved & listed for trims 8523 and 8563
- cULus Listed for Wet Location (with specified trims)
- Certified under ASTM-E283 for Air tight construction
- 2 HOURS FIRE RATED UL Listed (UL1598 / UL263)

8199HICA-FR

Size: H 7-1/2" x L 9" x W 12-1/2"
Aperture: 6-1/8"

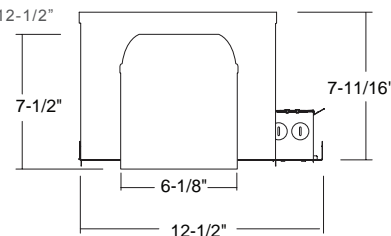


LED Trims for 8199HICA-FR

8523WH, OB




5/6" LED Baffle
12.5W, 850lms,
90 CRI, 3000K,
4000K
120V



8562WH, BN, BK, OB




6" LED Gimbal
13W, 900lms,
80 CRI, 3000K
120V



8563WH, BN, BK, OB, CL




6" LED Reflector
13W, 795lms,
90 CRI, 3000K,
4000K
120V/277V



8568WH



6" LED Module/Baffle Trim High Output
17W, 1240lms,
90 CRI, 3000K,
4000K
120V/277V



8317H

3" LED IC Rated Frame-In

120V



Features

Electrical

- Dimmable TRIAC, 10-100% for most of leading and trailing edge incandescent & low voltage dimmer switches
- Trims includes E-26 socket adapter for retro fit use

Housing

- Sturdy steel construction
- Suitable for use in new construction applications
- 4-7/8" height allows use in 2" x 6" joist construction
- Adjusts to accommodate up to 1-1/4" ceiling thickness
- IC Rated for direct contact with insulation

Junction Box

- J-Box is listed for through-branch circuit wiring (4in - 4out) and five 1/2" knockouts
- 3 port quick connectors pre-installed in all J-boxes

Bar Hanger

- Included bar hangers can be turned 90° on the plaster frame
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings
- Pre-installed captive nails on bar hangers
- Pre-installed bar hangers allow the housing to be positioned at any point within 24" joist span


Certifications

- cCSAus Listed for damp location
- Energy Star approved & listed for trims 8824 and 8825



8317H

Size: H 4-7/8" x L 8-1/8" x W 3-1/16"
Aperture: 3-1/16"

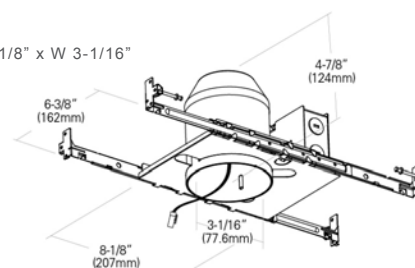


LED Trims for 8317H

8821WH, BN, OB




LED 3" Recessed Baffle
8W, 600lms
90 CRI, 3000K
120V
O.D. 3-3/4"



8822WH, BN, OB




LED 3" Recessed Gimbal
8W, 600lms,
90 CRI, 3000K
120V
O.D. 3-3/4"



8824WH




LED Retrofit Baffle
10W, 600lms,
90 CRI, 3000K
120V
O.D. 3-5/8"



8825WH



LED Retrofit Gimbal
10W, 600lms,
90 CRI, 3000K
120V
O.D. 3-5/8"



8317HR


3" LED IC Rated Remodel

120V



8317HR

Size: H 4-7/8" x L 11-1/4" x W 3-1/16"
Aperture: 3-1/16"

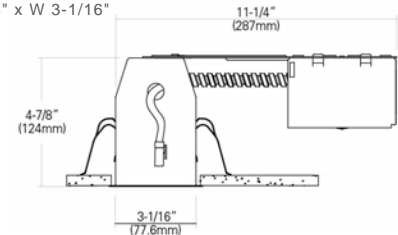

LED Trims for 8317HR

Features

Electrical

- Dimmable TRIAC, 10-100% for most of leading and trailing edge incandescent & low voltage dimmer switches
- Trims includes GU-10 socket adapter for retro fit use

Housing

- Sturdy steel construction
- Suitable for use in remodel applications
- 4-7/8" height allows use in 2"X 6" joist construction
- Adjusts to accommodate up to 1-1/4" ceiling thickness
- IC Rated for direct contact with insulation

Junction Box

- J-Box is listed for through-branch circuit wiring (4in - 4out) and five 1/2" knockouts
- 3-port quick connectors pre-installed in all J-boxes


Certifications

- cCSAus Listed for damp location
- Energy Star approved & listed for trims 8824 and 8825

8821WH, BN, OB




LED 3" Recessed Baffle
8W, 600lms
90 CRI, 3000K
120V
O.D. 3-3/4"



8822WH, BN, OB




LED 3" Recessed Gimbal
8W, 600lms
90 CRI, 3000K
120V
O.D. 3-3/4"



8824WH




LED Retrofit Baffle
10W, 600lms,
90 CRI, 3000K
120V
O.D. 3-5/8"



8825WH



LED Retrofit Gimbal
10W, 600lms,
90 CRI, 3000K
120V
O.D. 3-5/8"




8708

4" J-Box Recessed Insert



Features

- Installs in 4" Octagonal ceiling j-box (min 2" depth)
- 120V
- Dimmable TRIAC, 10-100%
- Beam Angle: 110°
- Simple and easy installation - light engine and trim connects via twist and lock
- IC Rated
- Operating temperature: 14°F - 104°F
- Durable aluminum construction
- 4-5/8" x 2-27/32" x 31/32"
- Available in white (WH), Die Cast Trim Accessories available in black (4-JBR-BK) or brushed nickel (4-JBR-BN)
- JA8 and State of California Title 24 Compliant
- cCSAus Listed for wet location
- Energy Star Listed

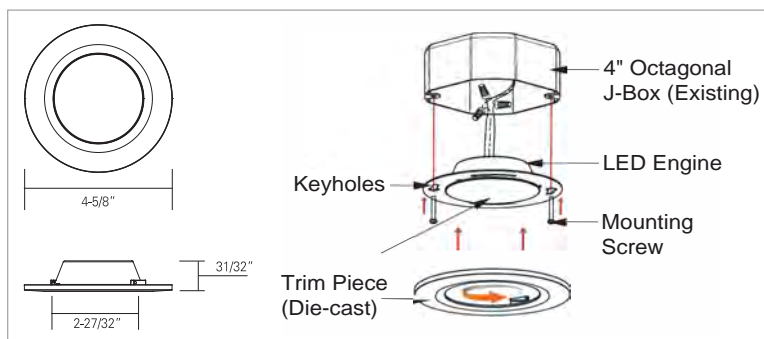

SKU#	Wattage	Lumens	Color Temp	CRI	Die Cast Trim Accessory
8708	11W	Source 830lms Delivered 650lms	30 3000K	90	4-JBR-BK: Black
			40 4000K		4-JBR-BN: Brushed Nickel




8775

4" IC Rated, LED Retrofit & New Construction Downlight

Features

- Built-in mouse trap springs for use in new construction or remodel using a PF-4 Mounting plate (Hole cut-out template included)
- 120V
- Dimmable TRIAC, 10-100%
- All-in-one structure with built-in J-box
- Durable aluminum with integrated trim
- Listed for through branch circuit wiring and includes (4) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp
- Available in white (WH)
- cCSAus Certified for use in wet locations
- Energy Star approved & listed
- JA8 and State of California Title 24 Compliant

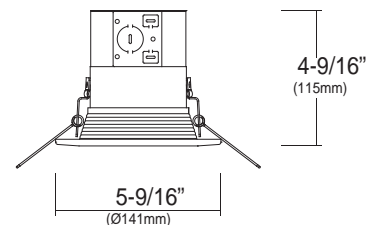

Ceiling Cut-out: 4-3/8"

SKU#	Wattage	Lumens	Color Temp	CRI	Mounting Plate Accessory
8775	13W	Source 960lms	30 3000K	90	PF-4
		Delivered 760lms	40 4000K		




8545

6" IC Rated, LED Retrofit & New Construction Downlight

Features

- Built-in mouse trap springs for use in new construction or remodel using a PF-6 Mounting plate (Hole cut-out template included)
- 120V
- Dimmable TRIAC, 10-100%
- All-in-one structure with built-in J-box
- Durable aluminum with integrated trim
- Listed for through branch circuit wiring and includes (4) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp
- Available in white (WH)
- cCSAus Certified for use in wet locations
- Energy Star approved & listed
- JA8 and State of California Title 24 Compliant

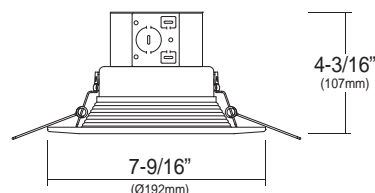

Ceiling Cut-out: 5-7/8"

SKU#	Wattage	Lumens	Color Temp	CRI	Mounting Plate Accessory
8545	20W	Source 1500lms	30 3000K	90	PF-6
		Delivered 1300lms	40 4000K		




8554


9" LED Low-Profile Disk Light

Features

- 120V
- Dimmable TRIAC, 10-100%
- Available in white (WH)
- Mounting bracket fits most 4/0 (4") j-box applications
- Dimensions: 9-1/2" Ø x 1-1/4" Height
- cCSAus for use in wet locations
- Energy Star approved and listed

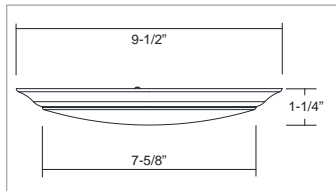

J-Box Mounting

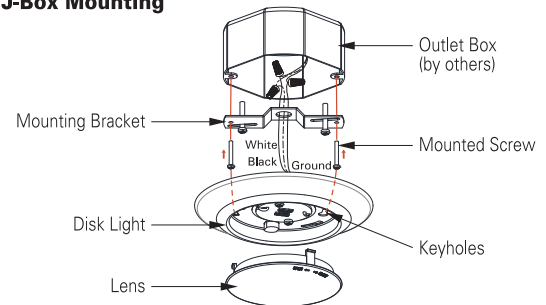

SKU#	Wattage	Lumens	Color Temp	CRI
8554	30W	2580lms Source, 1800lms Delivered	30 3000K	90
		2760lms Source, 1900lms Delivered	40 4000K	



8557__-90-345

6" LED Low-Profile Disc Light, Color Selectable



Features

- 120V
- Dimmable TRIAC, 10-100%
- CCT Selectable: 3000K, 4000K, 5000K
- Mounting bracket fits most 3/O (3") or 4/O (4") j-box application
- Available in white (WH)
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (C)(1)
- cCSAus for use in wet locations



Adjusted Color of Light
with Intrgrated Switch

SOFT WHITE (3000K)
BRIGHT WHITE (4000K)
DAYLIGHT (5000K)

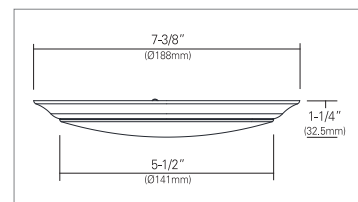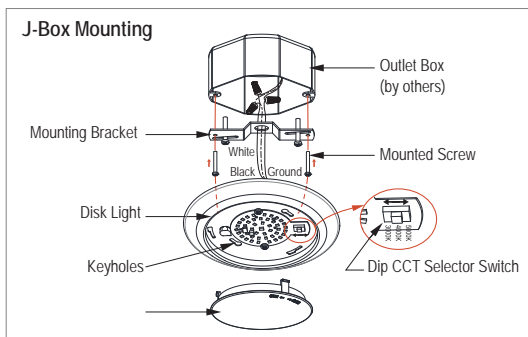



SKU#	Wattage	Lumens	Color Temp	CRI	Finish
8557__-90-345	15W	1050lms source / 850lms delivered @ 3K	CCT Selectable: 3000K, 4000K, 5000K	90	WH White
		1200lms source / 980lms delivered @ 4K			
		1220lms source / 995lms delivered @ 5K			



8556__-S Closet Light

Features

- When motion is detected, it automatically turns lights ON and turns Off after 30 seconds when the room is vacated (default setting)
- Durable metal housing construction
- Beam angle 110°
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (C)(1)
- cCSAus for use in wet locations
- JA8 and State of California Title 24 Compliant
- Energy Star Listed

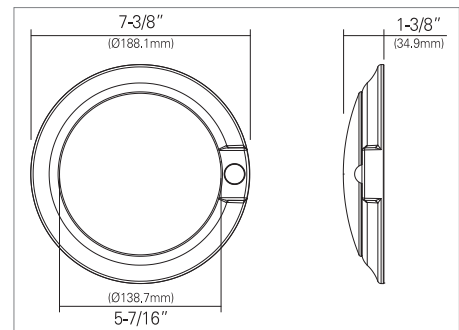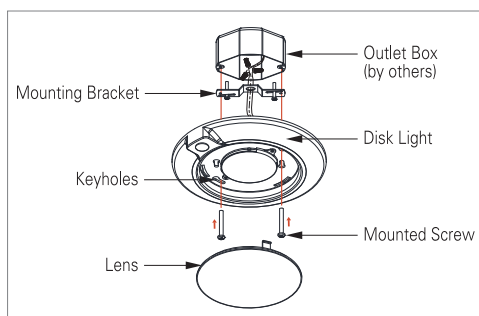

Model	Wattage	Lumen	Color Temp	CRI	Voltage	Dimension	Finish
8556__-S	15.3W	1050lms Source, 902lms Delivered	3K 3000K	90	120V	7-3/8" x 1-3/8"	WH White


4" and 6" LED Ultra-Thin Light



Features

- Ultra slim profile, Durable aluminum construction
- Frosted acrylic lens
- 120V-60Hz
- Dimmable TRIAC, 10-100%, 120° Beam Angle
- Suitable for use in wet locations
- Simple installation with hinged, off-board driver/ junction box, poke-in connectors, and linkable connector cable
- Spring-loaded retention tabs holds snug to ceiling surface
- IC Rated for direct contact with batt type fiberglass insulation
- Available in white (WH)


8742-2

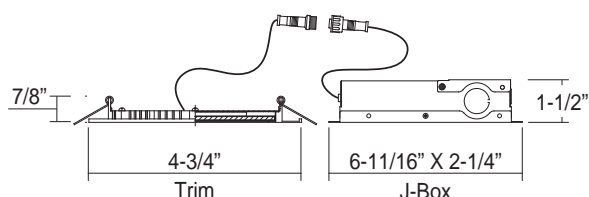


PF-4

Optional Mounting Plate Assembly

- The New Construction Mounting Plate Assembly
- Durable aluminum construction
- Includes four 24" bar hanger





8542-2

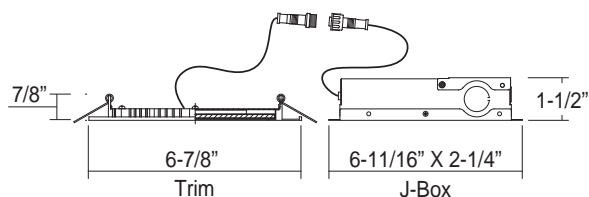

PF-6

Optional Mounting Plate Assembly

- The New Construction Mounting Plate Assembly
- Durable aluminum construction
- Includes four 24" bar hanger

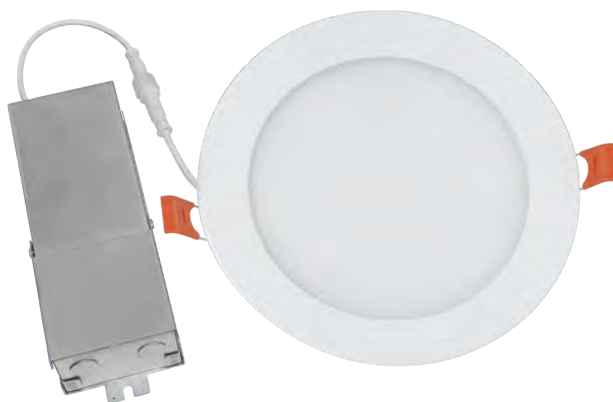

Model	Wattage	Delivered Lumens	Color Temp	CRI	Finish
8742-2 4" Ultra-Thin Light	12W	670lms	30 3000K	90	WH White
8542-2 6" Ultra-Thin Light	14W	884lms	40 4000K		

Introducing the **NEW Decorative Collection**

A sleek, contemporary design that fits any home, office or bathroom decor.

Wall Mount / Ceiling Mount



Vanity Lighting





Chandelier Edge-Lit LED Ribbon Light



Features

- Durable metal construction
- Dimmable TRIAC, 10-100%
- 120° beam angle
- 120V-60Hz - Power-over-cable
- Adjustable 6' wire length
- Available in brushed nickel
- cETLus for damp location listed
- Energy Star listed

4601



4602

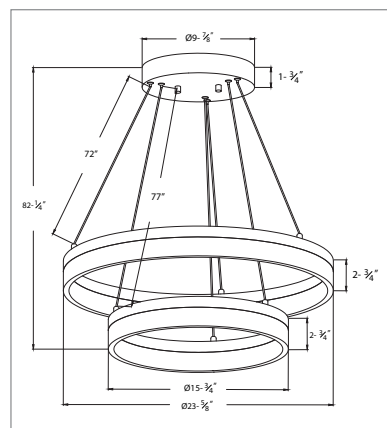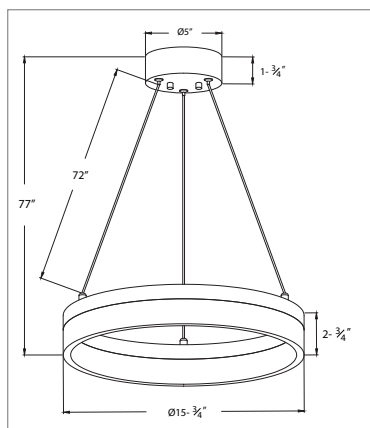

Model	Watts	Lumens	Color Temp	CRI	Voltage	Dimensions (DxH)	Finish
4601	25W	2200lms Source, 1750lms Delivered	3K 3000K	80	120V	15-3/4" x 77"	BN
4602	60W	5300lms Source, 4200lms Delivered				23-5/8" x 82-1/4"	




Island Edge-Lit LED Bar Ribbon Light

Features

- Durable metal construction
- 120V-60Hz - power-over-cable
- Dimmable TRIAC, 10-100%
- 120° beam angle
- Adjustable 6' wire length
- Available in brushed nickel
- Ceiling mount
- cETLus certified for damp location

4600

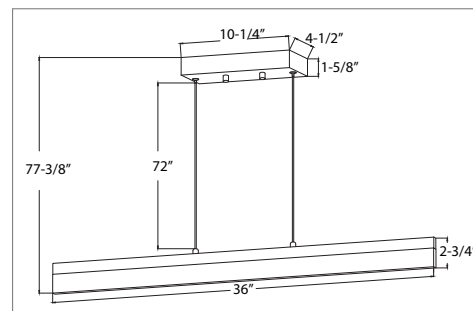

Model	Watt	Lumens	Color Temp	CRI	Voltage	Dimensions	Finish
4600	28W	2450lms Source, 1600lms Delivered	3K 3000K	80	120V	36" x 4-1/2" x 77-3/8"	BN




Edge-Lit LED Ribbon


Features

- Durable metal construction
- Acrylic lens
- Dimmable TRIAC, 10-100%
- 120° beam angle, Warm white light
- Led ceiling and wall mount
- Flexible design
- Easy to install
- Quick-connect design
- Available in brushed nickel


4506

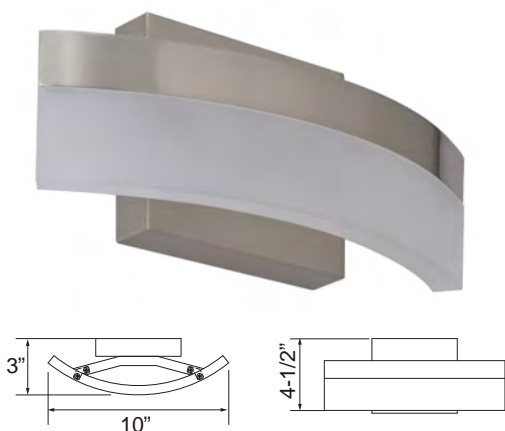

4319

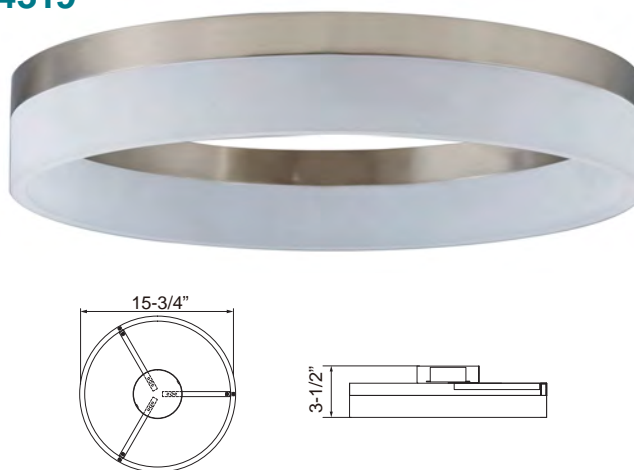

4905

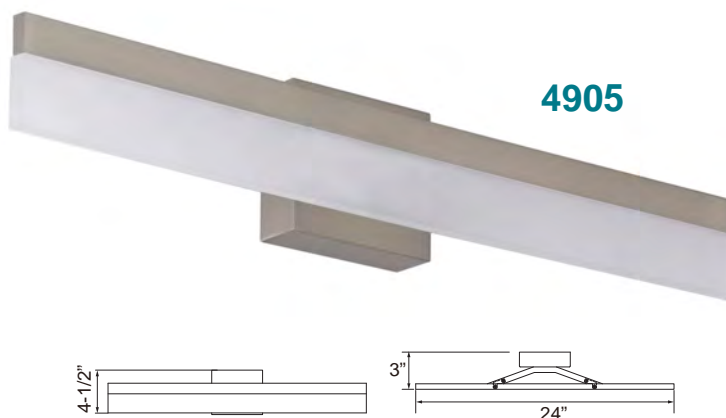

Model	Watts	Delivered Lumens	Color Temp	CRI	Voltage	Dimensions (L x W)	Finish
4506	9W	500lms	3K 3000K	81	120V	10" x 4-1/2" x 3"	BN
4319	25W	1450lms				15-3/4" x 3-1/2"	
4905	22W	15000lms				24" x 4-1/2" x 3"	




E26 A19 Mini Pendant Light

Features

- Durable metal construction, opal glass
- LED A19 Lamps (included)
- 120V-60Hz
- Adjustable length – max length: 6'
- Dimmable TRIAC, 10-100%
- Available in brushed nickel (BN)
- cETLus certified for damp location
- Energy Star listed

4605

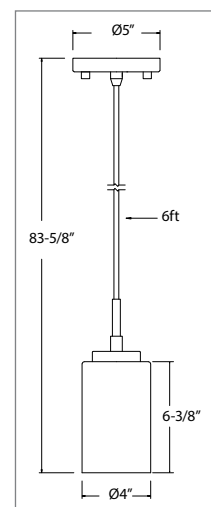

Model	Wattage/Lamp	Color Temp	CRI	Finish
4605 LED Pendant	9W E26	3K 3000K	80	BN Brushed Nickel



Chandelier E26 A19 LED Light



Features

- Durable metal construction
- Dimmable TRIAC, 10-100%
- Beam Angle: 120°
- LED A19 Lamps (included)
- Available in brushed nickel
- cETLus certified for damp location
- Energy Star listed

4603BN-3



4603BN-5

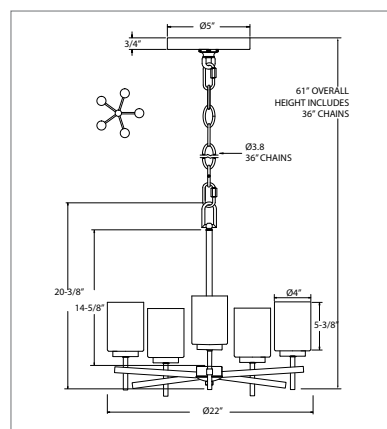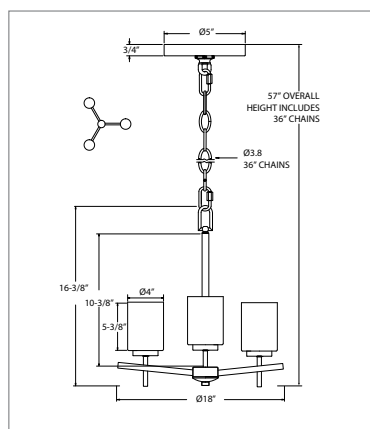

Model	Wattage/Lamp	Color Temp	CRI	Voltage	Dimension	Finish
4603BN-3	3-Light: 9W E26	3K 3000K	80	120V	D 18" x H 57"	BN Brushed Nickel
4603BN-5	5-Light: 9W E26				D 22" x H 61"	




Island E26 A19 LED Light

Features

- Durable metal construction, opal glass
- Ceiling mount
- LED A19 Lamps (included)
- Dimmable TRIAC, 10-100%
- Available in brushed nickel
- Includes: Two (2) 6" rods and Two (2) 12" rods per stem
- cETLus certified, damp location
- Energy Star listed

4604__-4

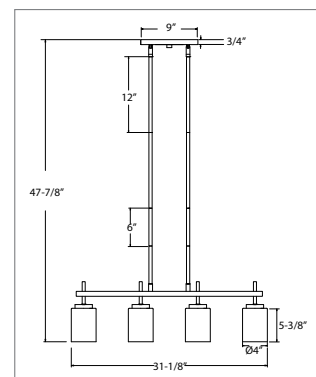


Model	Wattage/Lamp	Color Temp	CRI	Voltage	Dimension (WxH)	Finish
4604BN-4	4-Light: 9W E26	3K 3000K	80	120V	31-1/8" x 47-7/8"	BN Brushed Nickel



Vanity Light LED, 1-4, E26 A19

Features

- 120V-60Hz
- Fixture can be mounted with glass shades facing up or down
- Available in brushed nickel (BN)
- Opal glass shade, available in 1-light to 4-light configurations
- LED A19 Lamps (included)
- Dimmable TRIAC, 10-100%
- cETLus listed for damp locations
- Energy Star listed

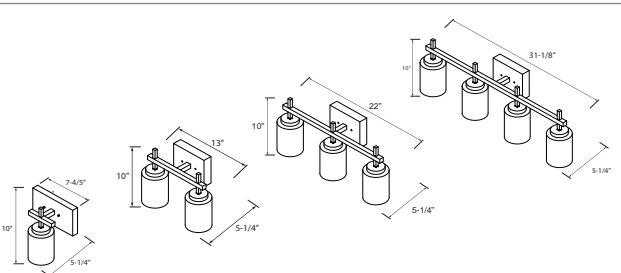

4908-1



4908-2



4908-3



4908-4


Model	Wattage/Lamp	Color Temp	CRI	Voltage	Dimension (WxDxH)	Finish
4908-1	1-Light: 9W E26	3K 3000K	80	120V	7-4/5" x 5-1/4" x 10"	BN
4908-2	2-Light: 9W E26				13" x 5-1/4" x 10"	
4908-3	3-Light: 9W E26				22" x 5-1/4" x 10"	
4908-4	4-Light: 9W E26				31-1/8" x 5-1/4" x 10"	



LED Linear Vanity Light, 18", 24", 36" and 48"

Features

- 120V-60Hz
- Available in brushed nickel (BN)
- Diffused acrylic lens is ideal for uniform light output
- Available in 4 lengths: 18", 24", 36" or 48"
- Dimmable TRIAC, 10-100%
- cETLus listed for damp locations
- JA8 and State of California Title 24 Compliant
- Energy Star listed

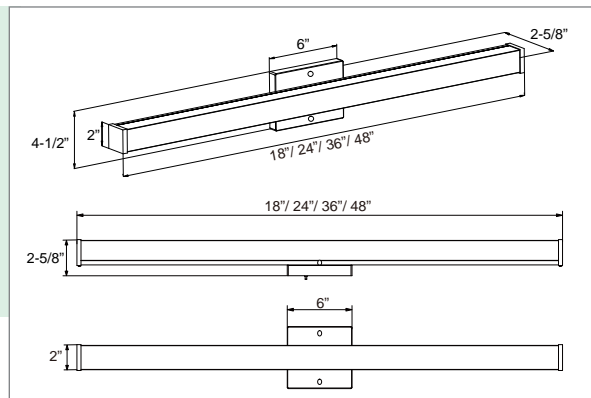

4907__-XX



Model	Watts	Lumens	Color Temp	CRI	Dimension (LxWxH)	Finish
4907__-18	12W	1080lms Source, 700lms Delivered	3K 3000K	90	18" x 2-5/8" x 4-1/2"	BN
4907__-24	15W	1350lms Source, 900lms Delivered			24" x 2-5/8" x 4-1/2"	
4907__-36	25W	2250lms Source, 1600lms Delivered			36" x 2-5/8" x 4-1/2"	
4907__-48	30W	2700lms Source, 2000lms Delivered			48" x 2-5/8" x 4-1/2"	

Other New Items

A collection of lighting that fits any room, office, and outdoor decor.

Lighting



Ceiling Mount



This sleek low profile LED Slim Round Surface Mount Fixture is an energy efficient LED light that comes complete with an integrated LED light engine - no additional light bulbs needed. This fixture can be mounted to any ceiling to provide light anywhere you need it.


4350



White (WH)



Brushed nickel (BN)

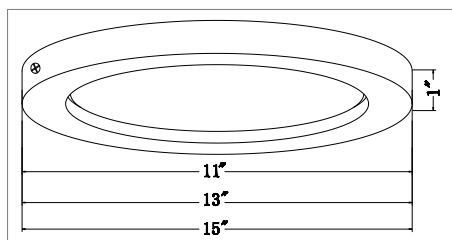

Features

- Durable steel construction
- Operating voltage AC120V-60Hz
- Dimmable TRIAC, 10-100%
- Beam Angle: 120°
- 50,000 hour projected life
- Opal acrylic lens protects LEDs and diffuses glare while allowing for optimum lumen output
- Brushed nickel (BN) or white (WH)
- cETLus
- JA8 and State of California Title 24 Compliant
- Energy Star listed


Model	Watt	Lumens	Color Temp	CRI	Size (Dia x D)	Finish
4350	13.7W	1170lms Source, 1000lms Delivered	3K 3000K	90	11" 11" x 1"	WH White
	18.5W	1680lms Source, 1400lms Delivered	4K 4000K		13" 13" x 1"	BN Brushed Nickel
	27.5W	2220lms Source, 1900lms Delivered			15" 15" x 1"	



Indoor Residential Wall Sconce

10" LED Series is a sconce fixture with white acrylic lens for soft, glare free illumination. The molded sconce lens allows the light designer to produce a cost effective, yet elegantly styled look. The ideal choice for indoor applications that will enhance any decor with its elegant profile.

4404-30-BN

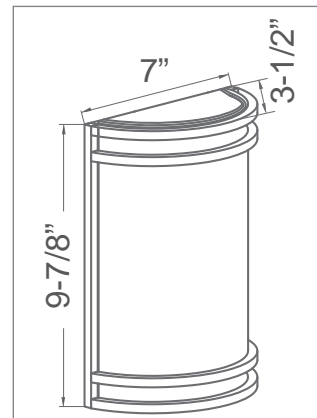

Features

- Durable steel construction
- Acrylic lens protects LEDs and diffuses glare while allowing for optimum lumen output
- For Indoor Use Only
- 120V-60Hz
- Available in 3000K
- Dimmable TRIAC, 10-100%
- 50,000 hour projected life
- Available in Brushed Nickel
- 7" W x 9-7/8" H x 3-1/2" D
- Energy Star listed
- cETLus

Model	Wattage	Lumen	Color Temp	CRI	Voltage	Dimension (W x H x D)	Finish
4404-30-BN	15W	1648lms Source, 1150lms Delivered	3K 3000K	80	120V	7" x 9-7/8" x 3-1/2"	BN

Track Heads


Clean, cool and attractive aesthetics provide an abundance of light for your interior space. Track lights that can be turned and tilted - an ideal choice for almost any interior space, great for residential kitchens, bars, and hospitality applications.

Features

- Operating voltage 120V
- Operating temperature 32°F (0°C) to 122°F (50°C)
- Dimmable TRIAC, 10-100%
- 90 CRI
- Available in 3000K
- 40° beam angle
- J-compatible
- Factory conversion to H-compatible is available
- Available in brushed aluminum (BA), white (WH) and black (BK)


7584

- H 5" x W 2-1/2" x D 3-3/4"
- 10W | 800lms | 80lm/W




7588

- H 9-1/2" x W 5" x D 5-7/16"
- 28W | 2016lms | 72lm/W




7586

- H 6-1/2" x W 2-3/4" x D 2-7/8"
- 8W | 700lms | 87lm/W




7589

- H 4-3/8" x W 3-11/16" x D 4-11/16"
- 15W | 1200lms | 80lm/W




7587

- H 7-1/2" x W 4" x D 4-2/5"
- 20W | 1600lms | 80lm/W



7590

- H 5-1/16" x W 4-15/16" x D 5-1/16"
- 20W | 1600lms | 80lm/W






Under Cabinet Light

9", 12", 18", 21", 24", 36", & 48" Light, Color Selectable

89XX__-2734




Adjusted Color of Light with Intrgrated Switch



Features

- 120V-60Hz
- Dimmable TRIAC, 10-100%
- CCT Selectable: 2700K, 3000K, 4000K
- Linkable design - listed for both hardwire or plug-in
- Hinged wiring trough for easy access to wires
- Fast hard-wiring with snap-in connector
- 8966/8967: (1) 1/2" knockout located on the back side of housing
- 8968-72: (2) 1/2" knockouts located on the back side of housing
- Available in white (WH)
- Energy Star listed
- cCSAus listed

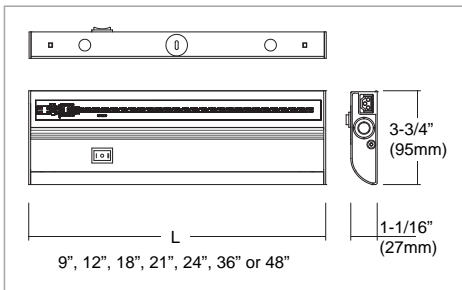

Available Accessories

- 6" Connector cord: 897CN-6
- 12" Connector cord: 897CN-12
- 24" Power cord: 897PC-24
- End-to-end connector: 897CN

Model	Watts	Lumens	Color Temp	CRI	Volt	Dimension (LxWxH)
8966__-2734	4W	320lms Source, 250lms Delivered	CCT Selectable 2700K, 3000K, 4000K	90	120V	9" x 3-3/4" x 1-1/16"
8967__-2734	5W	400lms Source, 315lms Delivered				12" x 3-3/4" x 1-1/16"
8968__-2734	7W	630lms Source, 500lms Delivered				18" x 3-3/4" x 1-1/16"
8969__-2734	8W	750lms Source, 595lms Delivered				21" x 3-3/4" x 1-1/16"
8970__-2734	9W	850lms Source, 670lms Delivered				24" x 3-3/4" x 1-1/16"
8971__-2734	13W	1140lms Source, 900lms Delivered				36" x 3-3/4" x 1-1/16"
8972__-2734	17W	1500lms Source, 1190lms Delivered				48" x 3-3/4" x 1-1/16"



Step Light

8919__-18K

Outdoor LED Mini Step Light - 18K

Features



- 120V-60Hz
- 5W, 215lms
- 1800K, CRI 80
- cETLus listed for wet location



8919BK-18K



8919OB-18K

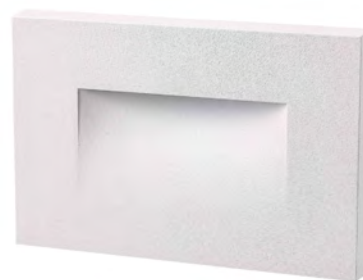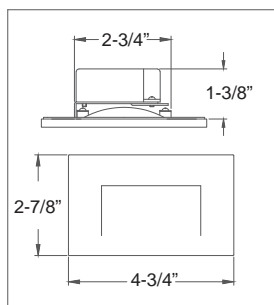

8919WH-18K


Model	Wattage	Lumens	Color Temp	CRI	Dimensions (LxDxH)	Finish
8919__-18K	5W	305lms Source, 171lms Delivered	18K 1800K	80	4-3/4" x 1-3/8" x 2-7/8"	BN Brushed Nickel
						OB Bronze
						WH White

Emergency



REL35-BA

LED Recessed Emergency Lighting

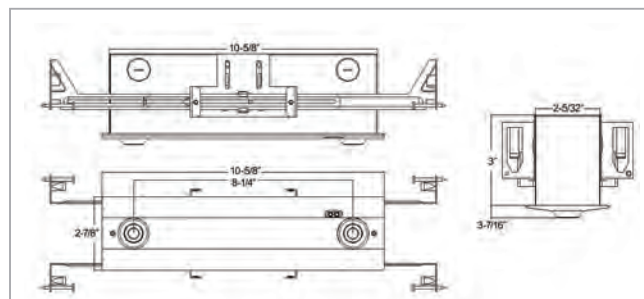

Features

- 120/277VAC 60Hz
- Source lumens: 300lms | delivered lumens: 250lm
- Max. 1.5W* 2pcs
- Ni-Mh 3.6V battery
- Beam angle: 30°
- Ambient temperature of 50°F (10°C) to 104°F (40°C)
- High impact thermoplastic and flame retardant housing, low profile, ultra slim design
- Completely self-contained
- 90 minutes of illumination in case of power failure

- Pre-installed bar hangers allow unit to be positioned at any point within a 24" joist span
- Bar hangers for mounting to T-Grid ceiling
- Conduit entry through knock-outs
- Recessed ceiling and recessed wall mounting
- 10-5/8" x 3" x 2-3/4"
- Finish: Brushed Aluminum
- UL listed for damp location
- UL924 standard, comply with NFPA101, NFPA70, NEC and OSHA requirements

Model	Finish
REL35-__	BA Brushed Aluminum

Operation


When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 12 hours.

Combo



RXEL35, RXEL36

LED Recessed Edge-lit Exit and Emergency Light Combo

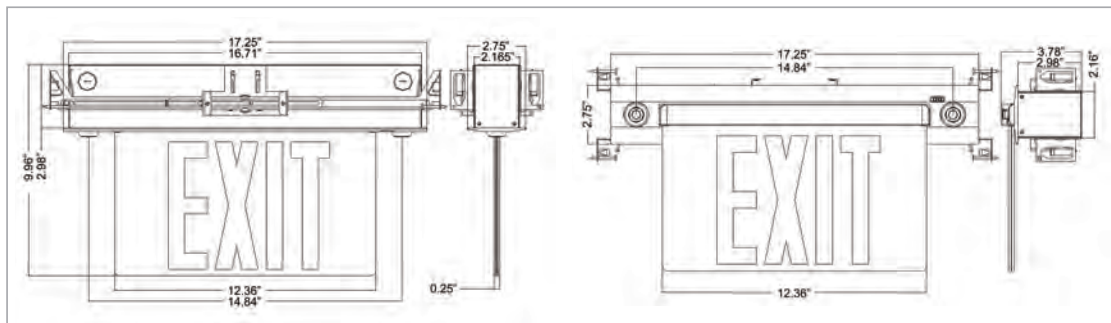

Features

- 120/277VAC 60Hz
- **RXEL35:** Red or green single clear acrylic faceplate
- **RXEL36:** Red or green double sided mirrored finish faceplate
- Source lumens: 300lms | delivered lumens: 250lm
- Max. 1.5W* 2pcs
- Ni-Mh 3.6V battery
- Beam angle: 30°
- Ambient temperature of 50°F (10°C) to 104°F (40°C)
- 90 minutes of illumination in case of power failure
- Extrusion aluminum alloy trim plate with changeable Acrylic panel
- IC Rated
- Full angle adjustable lamp heads
- Completely self-contained
- Recessed ceiling and recessed wall mounting
- JA8 and State of California Title 24 Compliant
- UL listed for damp location
- UL924 standard, comply with NFPA101, NFPA70, NEC and OSHA requirements

Model	Finish
RXEL35	RBA Red letters, brushed aluminum housing
	GBA Green letters, brushed aluminum housing


Model	Finish
RXEL36	RBA Red letters, brushed aluminum housing
	GBA Green letters, brushed aluminum housing

Emergency LED Battery Back-up



4783EM

Constant Power Emergency LED Battery Backup

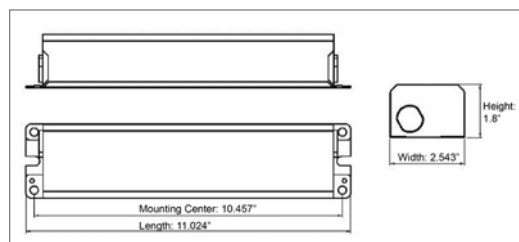

Features

- 120V-277V Universal Voltage
- Input power rating: 7 Watts max.
- Output power: 12 Watts (constant power)
- Output voltage: 10 V~60VDC
- Output current: 1.2 A(@10VDC) - 0.2A(@60VDC)
- Emergency operation: 90 minutes minimum
- Battery: LiFePO₄, 9.6V 3000mAH
- Recharge time: 24 hours maximum
- Temperature rating: 50~122°F
- High watt emergency LED Battery Backup
- 20 gauge steel construction case with powder coated
- IC Rated and suitable for use in plenum and damp location fixtures

- Constant power design maintains illumination throughout the 90-minutes runtime with no light degradation
- Two-wire universal AC input
- Self-sensing output voltage operates various product types reducing product SKUs for emergency options
- 11.024" x 2.543" x 1.8" (L x W x H)
- UL 924 listed for filed installation
- Meets or exceeds all NEC, IBC and Life Safety Code emergency lighting requirements
- RoHS compliant
- California Energy Commission (CEC) compliant

Operation

Universal Battery Back-up for AC and DC LED fixtures in case of power failure.

NEW

Ceiling Fan Collection

A collection of ceiling fans that fit any situation whether it is Energy Star 4.0, wet location listed, large size or a series of Energy Star light kits.

Ceiling Fans



Energy Star Light Kits



Metalis



- 4 MDF blades
- 1023: 153 x 9 mm motor
- 1024: 153 x 15 mm motor
- 12° blade pitch, 12" lead wire
- 4 speed / reversible
- Pull chain control
- Integrated light kit: 15W LED, 1240lms (source), 700lms (delivered), 3000K, 80 CRI, dimmable



Brushed Nickel Finish / Natural Maple Blades



Brushed Nickel Finish / Walnut Blades




Oil Rubbed Bronze Finish / Walnut Blades



Brushed Nickel Finish / Brushed Nickel Blades



White Finish / White Blades

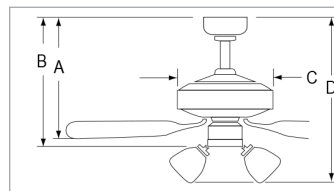

Dimensions
A: 8-1/2"
B: 10-7/8"
C: 7-1/2"
D: -

Ordering Information

Model	Finish / Blade Color
1023__-PC 42" Sweep Hugger	BN Brushed Nickel / Natural Maple
	BN-WT Brushed Nickel / Walnut
	BN-BN Brushed Nickel / Brushed Nickel
1024__-PC 52" Sweep Hugger	OB Oil Rubbed Bronze / Walnut
	WW White / White

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1023__-PC	5600	47	120V
1024__-PC	5300	60	

Sabio



- 3 MDF blades
- 1021: 153 x 9 mm motor
- 1022: 153 x 14 mm motor
- 4 speed / reversible
- 12° blade pitch, 12" lead wire
- Pull chain control
- Integrated light kit: 15W LED, 1240lms (source), 700lms (delivered), 3000K, 80 CRI, dimmable



Brushed Nickel Finish / Walnut Blades



Brushed Nickel Finish /
Natural Maple Blades




Oil Rubbed Bronze Finish /
Walnut Blades



Brushed Nickel Finish /
Brushed Nickel Blades



White Finish / White Blades

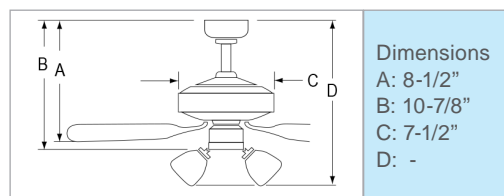

Ordering Information

Model	Finish / Blade Color
1021__-PC 42" Sweep Hugger	BN Brushed Nickel / Natural Maple
	BN-WT Brushed Nickel / Walnut
	BN-BN Brushed Nickel / Brushed Nickel
1022__-PC 52" Sweep Hugger	OB Oil Rubbed Bronze / Walnut
	WW White / White

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1021__-PC	3945	46	120V
1022__-PC	4329	61.4	

Arctic



- 7 Aluminum blades
- 18° blade pitch
- 76" lead wire
- 8" & 24" downrod included (1" diameter)
- 180 x 17 mm DC motor
- 5 speed / reversible
- Includes DC wall control:
1070W: WCR-70 / 1080W: WCR-80
- Light kit adaptable
- UL listed for wet location
- Energy Star 4.0 Compliant




Brushed Pewter Finish / Brushed Pewter Blades




White Finish / White Blades



Oil Rubbed Bronze Finish / Oil Rubbed Bronze Blades

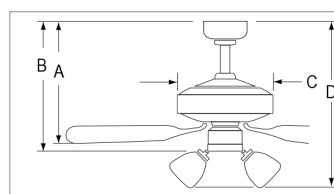

1070
Dimensions
A: 11-1/4"
B: 17-1/4"
C: 8-3/4"
D: -

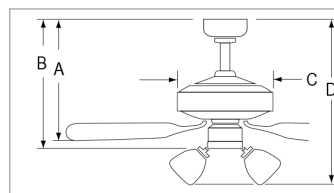

1080
Dimensions
A: 11-1/4"
B: 17-1/4"
C: 8-3/4"
D: -

Ordering Information

Model	Finish / Blade Color
1070W 70" Sweep	BP-BP Brushed Pewter / Brushed Pewter
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze
1080W 80" Sweep	WW-WW White / White

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1070W	10012.36	39.92	120V
1080W	11480	56	



Rio Grande

- 3 Platane wood blades
- 76" lead wire
- 8" & 24" downrod included
- 155 x 20 mm DC motor
- 5 speed / reversible
- Integrated LED light kit on 1088LED
- Includes DC wall control: WCR-88
- Additional downrods available: ER36 (36"), ER48 (48") and ER60 (60")



Oil Rubbed Bronze / Walnut Blades




1088LED

15W, 1240lms (source), 700lms (delivered),
3000K, 83 CRI, Dimmable
Finish: Frosted glass lens
LC-OB-102: Metal cover for no light option

Ordering Information

Model	Finish / Blade Color
1088 88" Sweep	OB Oil Rubbed Bronze / Walnut
1088LED 88" Sweep	

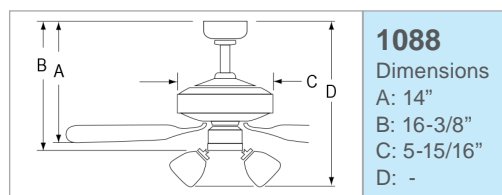

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1088 1088LED	4320	30.6	120V

Europa III




- 4 Wood blades, 12° blade pitch
- 76" lead wire, 4" downrod included
- 90 x 16 mm DC motor
- 3 speed / reversible
- Integrated LED light kit: satin white glass, 16W LED, 1200lms (source), 840lms (delivered), 3000K, 90 CRI, dimmable
- 1009LED: Pull chain control
- 1009LED-__-WC includes wall control WCR-97
- JA8 and State of California Title 24 Compliant
- Energy Star 4.0 Compliant



Brushed Nickel Finish /
Brushed Nickel Blades



1009LED-__-WC
Brushed Nickel Finish /
Brushed Nickel Blades

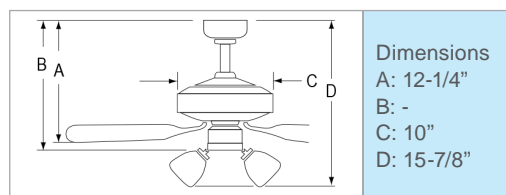

Ordering Information

Model	Finish / Blade Color
1009LED 52" Sweep, DC Motor, Pull Chain	BN Brushed Nickel / Brushed Nickel
1009LED-__-WC 52" Sweep, DC Motor, Wall Control	

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1009LED	5336	31.31	120V
1009LED-__-WC	5269	30.73	

Mirage III




- 5 Wood blades, 12° blade pitch
- 76" lead wire, 4" downrod included
- 90 x 16 mm DC motor,
- 3 speed / reversible
- Integrated LED light kit: satin white glass, 16W LED, 1200lms (source), 840lms (delivered), 3000K, 90 CRI, dimmable
- 1006LED: Pull chain control
- 1006LED-__-WC includes wall control WCR-97
- JA8 and State of California Title 24 Compliant
- Energy Star 4.0 Compliant



Brushed Nickel Finish /
Brushed Nickel Blades



1006LED-__-WC
Brushed Nickel Finish /
Brushed Nickel Blades

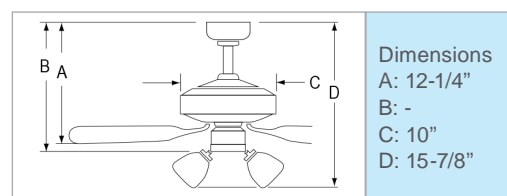

Ordering Information

Model	Finish / Blade Color
1006LED 52" Sweep, DC Motor, Pull Chain	BN Brushed Nickel / Brushed Nickel
1006LED-__-WC 52" Sweep, DC Motor, Wall Control	

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1006LED	5220	29.65	120V
1006LED-__-WC	5115	32.24	

Contempo III




- 3 Wood blades, 12° blade pitch
- 76" lead wire, 4" downrod included
- 90 x 16 mm DC motor
- 3 speed / reversible
- Integrated LED light kit option: satin white glass, 16W LED, 1200lms (source), 840lms (delivered), 3000K, 90 CRI, dimmable
- 1097LED: Pull chain control
- 1097LED-___-WC includes wall control WCR-97
- JA8 and State of California Title 24 Compliant
- Energy Star 4.0 Compliant



Brushed Nickel Finish /
Brushed Nickel Blades



1097LED-___-WC
Brushed Nickel Finish /
Brushed Nickel Blades

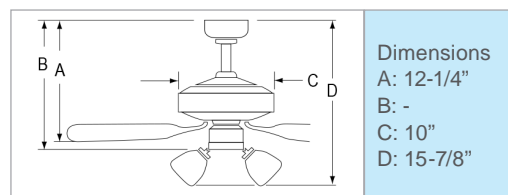

Ordering Information

Model	Finish / Blade Color
1097LED 52" Sweep, DC Motor, Pull Chain	BN Brushed Nickel / Brushed Nickel
1097LED-___-WC 52" Sweep, DC Motor, Wall Control	

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1097LED	5429	30.82	120V
1097LED-___-WC	5436	30.84	

Torque




- 3 Wood blades
- 11° blade pitch
- 76" lead wire, 4" downrod included
- 153 x 18 mm motor
- 3 speed / reversible



Oil Rubbed Bronze Finish / Carved Walnut Blades



Brushed Nickel / Carved Maple

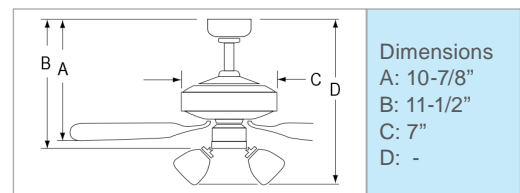

Ordering Information

Model	Finish / Blade Color
1073__-PC 52" Sweep, Pull Chain	BN Brushed Nickel / Carved Maple
	OB Oil Rubbed Bronze / Carved Walnut

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1073__-PC	5600	57	120V

Torque




- 3 Wood blades
- 11° blade pitch
- 76" lead wire, 4" downrod included
- 153 x 18 mm motor
- Integrated LED light kit: polycarbonate lens, 16W LED, 1290lms (source), 850lms (delivered), 3000K, 90 CRI, dimmable
- 3 speed / reversible
- Included Remote: RC-8



Brushed Nickel Finish / Carved Maple Blades



Oil Rubbed Bronze Finish / Carved Walnut Blades

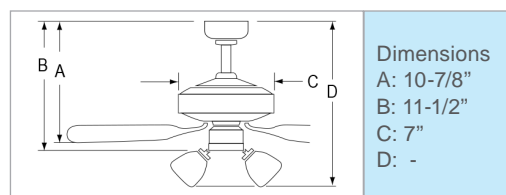

Ordering Information

Model	Finish / Blade Color
1073LED-__-PC 52" Sweep, LED, Pull Chain	BN Brushed Nickel / Carved Maple
	OB Oil Rubbed Bronze / Carved Walnut

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1073LED__-PC	5068	60	120V

Colibri




- 3 ABS blades
- 11° blade pitch
- 76" lead wire
- 4" downrod included
- 188 x 12 mm motor
- 3 speed / reversible
- Pull chain control
- Light kit adaptable



Brushed Nickel Finish / Natural Maple Blades



Oil Rubbed Bronze Finish / Walnut Blades

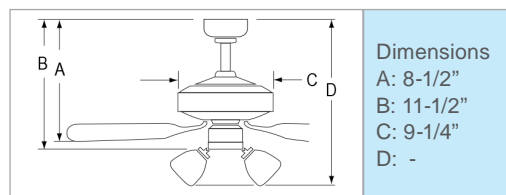

Ordering Information

Model	Finish / Blade Color
1072__-PC	BN Brushed Nickel / Natural Maple
60" Sweep, Pull Chain	OB Oil Rubbed Bronze / Walnut

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1072__-PC	7716	63.5	120V

Colibri




- 3 ABS blades
- 11° blade pitch
- 76" lead wire
- 188 x 12 mm motor
- 4" downrod included
- 3 speed / reversible
- Pull chain control
- Integrated LED light kit: satin white glass, 15W, 1300lms (source), 1170lms (delivered), 3000K, 90 CRI, Dimmable



Brushed Nickel / Natural Maple



Oil Rubbed Bronze / Walnut

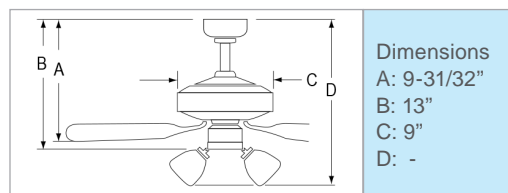

Ordering Information

Model	Finish / Blade Color
1072LED-__-PC	BN Brushed Nickel / Natural Maple
60" Sweep, Pull Chain	OB Oil Rubbed Bronze / Walnut

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1072LED-__-PC	7716	63.5	120V

Aldea



- 4 MDF blades
- 11° blade pitch
- 76" lead wire, 4" downrod included
- 153mm x 12mm motor
- 3 speed / reversible
- Pull chain control
- Integrated LED light kit: satin white glass, 16W, 1200lms (source), 780lms (delivered), 3000K, 90CRI, Dimmable



Brushed Nickel Finish / Walnut Blades



Brushed Nickel Finish /
Brushed Nickel Blades




Brushed Nickel Finish /
Natural Maple Blades



Oil Rubbed Bronze Finish /
Walnut Blades



White Finish / White Blades

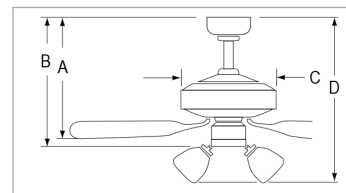

Dimensions
A: 9-31/32"
B: 13"
C: 6-78"
D: -

Ordering Information

Model	Finish / Blade Color
1071LED 52" Sweep, Pull Chain	BN-BN Brushed Nickel / Brushed Nickel
	BN-WT Brushed Nickel / Walnut
	BN-NM Brushed Nickel / Natural Maple
	OB-WT Oil Rubbed Bronze / Walnut
	WW-WW White / White

Performance

Model Number	Energy Information at High Speed			Voltage
	Airflow CFM	Power Use Watts	Efficacy CFM/ Watts	
1071LED	4485	57	79	120V

Aldea II




- 3 MDF blades
- 11° blade pitch
- 76" lead wire, 4" downrod included
- 153mm x 12mm motor
- 3 speed / reversible
- Pull chain control
- Light Kit Capable



Brushed Nickel Finish / Walnut Blades



Brushed Nickel Finish /
Brushed Nickel Blades

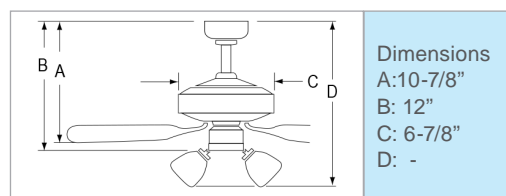

Ordering Information

Model	Finish / Blade Color
1074 52" Sweep, Pull Chain	BN-WT Brushed Nickel / Walnut
	BN-BN Brushed Nickel / Brushed Nickel

Performance

Model Number	Energy Information at High Speed			Voltage
	Airflow CFM	Power Use Watts	Efficacy CFM/ Watts	
1074	4823	56	87	120V

Aldea II



- 3 MDF blades
- 11° blade pitch
- 76" lead wire, 4" downrod included
- 153mm x 12mm motor
- 3 speed / reversible
- Pull chain control
- Integrated LED light kit: satin white glass, 16W, 1200lms (source), 780lms (delivered), 3000K, 90CRI, Dimmable



Brushed Nickel Finish / Walnut Blades



Brushed Nickel Finish /
Brushed Nickel Blades




Brushed Nickel Finish /
Natural Maple Blades



Oil Rubbed Bronze Finish /
Walnut Blades



White Finish / White Blades

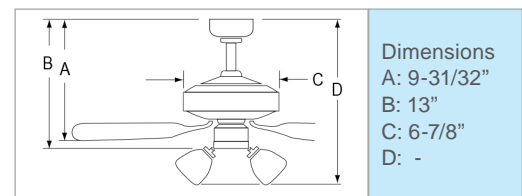

Ordering Information

Model	Finish / Blade Color
1074LED 52" Sweep, Pull Chain	BN-BN Brushed Nickel / Brushed Nickel
	BN-WT Brushed Nickel / Walnut
	BN-NM Brushed Nickel / Natural Maple
	OB-WT Oil Rubbed Bronze / Walnut
	WW-WW White / White

Performance

Model Number	Energy Information at High Speed			Voltage
	Airflow CFM	Power Use Watts	Efficacy CFM/ Watts	
1074LED	4867	56.6	86	120V

Desert Moon



- 5 MDF blades
- 11.5° blade pitch
- 52" lead wire, 4" downrod included
- AC Motor: 172 x14mm
- 3 speed / reversible
- Dual mount
- Light kit adaptable
- Pull chain control
- Energy Star 4.0 Compliant



Brushed Nickel / Natural Maple



Brushed Nickel Finish /
Brushed Nickel Blades



Brushed Nickel Finish /
Rosewood Blades



Brushed Nickel Finish /
White Blades




Brushed Nickel Finish /
Walnut Blades



Oil Rubbed Bronze Finish /
Walnut Blades



White Finish / White
Blades

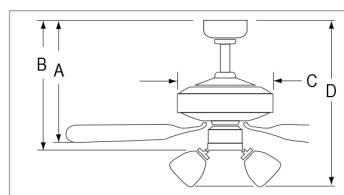

Dimensions
A: 11-7/8"
B: 12-5/8"
C: 11"
D: -

Ordering Information

Model	Finish / Blade Color
1032 52" Sweep, Pull Chain	BN-NM Brushed Nickel / Natural Maple
	BN-BN Brushed Nickel / Brushed Nickel
	BN-RW Brushed Nickel / Rosewood
	BN-WW Brushed Nickel / White
	BN-WT Brushed Nickel / Walnut
	OB-WT Oil Rubbed Bronze / Walnut
	WW-WW White / White

Performance

Model Number	Energy Information at High Speed			Voltage
	Airflow CFM	Power Use Watts	Efficacy CFM/ Watts	
1032	5017	49.84	101	120V


Energy Star Ceiling Fan Light Kit

1RP8__-ES



Features

- 120V-60Hz
- 2x9W, 800lms, E26 LED A19, Lamps included
- Dimmable 10~100%
- Durable steel construction, glass lens
- Available in brushed nickel, oil rubbed bronze or white
- Energy Star 4.0 Compliant
- cETLus listed
- cULus listed

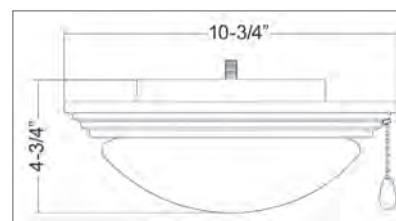


Model No.	Size (W x H)	Input Volt.	Watts	LED		Lumens (Typical)	Shade	Energy Star	Finish
				CCT	CRI				
1RP8__-ES	W 10-3/4" x H 4-3/4"	120V	2x9W	3000K	90	800	Glass	Yes	BN, OB, WW



1RP18__-ES



1RP18__-SG-ES

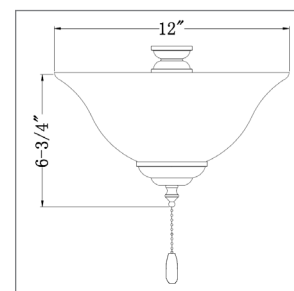

Features

- 120V-60Hz
- 3x9W, 800lms, E26 LED A19, Lamps included
- Durable steel construction
- 1RP18__-ES: Alabaster Glass lens or
- 1RP18__-SG-ES: satin glass
- Available in brushed nickel, oil rubbed bronze, black or white
- Energy Star 4.0 Compliant
- cETLus listed
- cULus listed

Model No.	Input Volt.	Watts	LED		Lumens (Typical)	Shade	Size (W x H)	Finish	Energy Star
			CCT	CRI					
1RP18__-ES	120V	3x9W	3000K	90	800	Alabaster Glass	12" x 6-3/4"	BN, OB, WW, BK	Yes
1RP18__SG-ES						Satin Glass			


Energy Star Ceiling Fan Light Kit



1RP22__-ES

Features

- 120V-60Hz
- 2x9W, 800lms, E26 LED A19, Lamps included
- Durable steel construction, glass lens
- Available in brushed nickel, oil rubbed bronze or white
- Energy Star 4.0 Compliant
- cETLus listed
- cULus listed

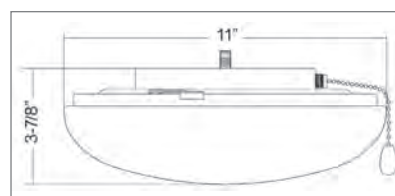


Model No.	Size	Input Volt.	Watts	Lumens (Typical)	LED		Shade	Energy Star	Finish
	(W x H)				CCT	CRI			
1RP22__-ES	W 11" x H 3-7/8"	120V	2x9W	800	3000K	90	Glass	Yes	BN, OB, WW

1RP82__-ES

Features

- 120V-60Hz
- 2x9W, 800lms, E26 LED A19, Lamps included
- Durable steel construction, glass lens
- Available in brushed nickel, oil rubbed bronze or white
- Energy Star 4.0 Compliant
- cETLus listed
- cULus listed

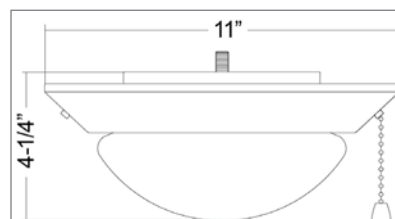

Model No.	Size	Input Volt.	Watts	Lumens (Typical)	LED		Shade	Energy Star	Finish
	(W x H)				CCT	CRI			
1RP82__-ES	W 11" x H 4-1/4"	120V	2x9W	800	3000K	90	Glass	Yes	BN, OB, WW

Wall Controls



Most of our fans are equipped with a pull chain speed control and a forward/reverse switch offering a full range of wall mounted controls.

WCR-70

- Fan / Light Remote Control
- Wall mount
- 5 speed, forward / reverse function
- On / Off light control
- For 1070W fans only



WCR-80

- Fan / Light Remote Control
- Wall mount
- 5 speed, forward / reverse function
- On / Off light control
- For 1080W fans only



WCR-88

- Fan Remote Control
- Wall mount
- 5 speed, forward / reverse function
- For 1088 fans only




WCR-97

- Fan / Light Remote Control
- Wall mount
- 5 speed, forward / reverse function
- On / Off light control
- For 1006LED-___-WC, 1009LED-___-WC or 1097LED-___-WC fans only



Additional Remote Control and Wall Control options available at www.rplighting.com

1006LED	41	4908-4.....	24
1006LED-__-WC	41	7584	29
1009LED	40	7586	29
1009LED-__-WC	40	7587.....	29
1021__-PC.....	37	7588	29
1022__-PC.....	37	7589	29
1023__-PC.....	36	7590	29
1024__-PC.....	36	8199HICA-FR.....	7
1032.....	50	8317H	8
1070W	38	8317HR.....	9
1071LED.....	47	8320H.....	5
1072__-PC.....	45	8321H	6
1072LED-__-PC	46	8523	7
1073__-PC.....	43	8542-2	16
1073LED__-PC.....	44	8556__-S.....	15
1074.....	48	8557__-90-345	14
1074LED.....	49	8545	12
1080W	38	8554	13
1088	39	8562	7
1088LED	39	8563	7
1097LED.....	42	8568	7
1097LED-__-WC	42	8708.....	10
1RP18__-ES.....	51	8742-2.....	16
1RP18__-SG-ES	51	8775.....	11
1RP22__-ES.....	52	8821.....	8, 9
1RP8__-ES.....	51	8822	8, 9
1RP82__-ES.....	52	8824	8, 9
4319.....	20	8825	8, 9
4350	27	8861AJ-WH.....	5
4404-30-BN	28	8861S-WH.....	5
4506	20	8862AJ-WH.....	6
4600	19	8862S-WH.....	6
4601	18	8919__-18K.....	31
4602	18	8966__-2734	30
4603BN-3.....	22	8967__-2734.....	30
4603BN-5.....	22	8968__-2734	30
4604__-4	23	8969__-2734	30
4605	21	8970__-2734.....	30
4783EM	34	8971__-2734.....	30
4905	20	8972__-2734.....	30
4907__-18	25	REL35-BA	32
4907__-24.....	25	RXEL35.....	33
4907__-36.....	25	RXEL36.....	33
4907__-48.....	25	WCR-70.....	53
4908-1	24	WCR-80	53
4908-2.....	24	WCR-88	53
4908-3.....	24	WCR-97.....	53



RP LIGHTING • FANS

4931 Paseo Del Norte NE
Albuquerque, NM 87113

Phone: (505) 821-6964
Toll Free: (800) 937-6925

Fax: (505) 821-0367
Toll Free: (888) 207-9509

Email: rplighting@rplighting.com

© 2019 RP Lighting • Fans

www.RPLighting.com