


# 4432-1

120-277V

Catalog #:		Type
Project:		Date
Prepared by:		

## Adjustable Outdoor LED Full-Cutoff Wall Pack, Wet Listed

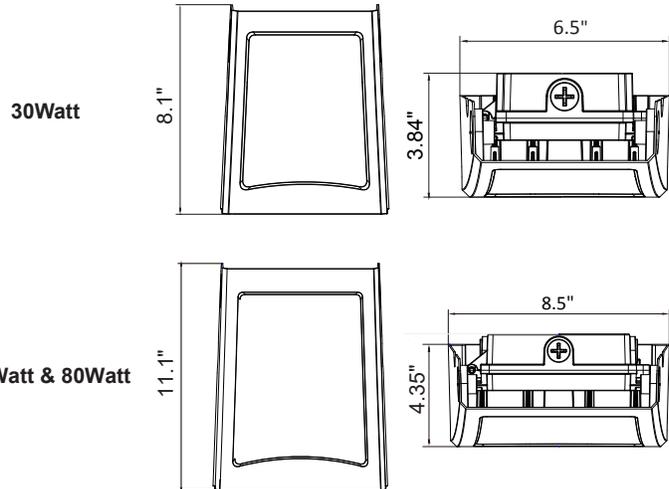

### DESCRIPTION

Flexibility and high output in a small footprint are key with this 120-277V adjustable LED outdoor wall pack. Adjustments from 0°-90° provides you with a "full cut-off" option in the down position or adjustments in between to meet your lighting needs. The included photocell is connected as a default but can be disconnected, depending on your application. With lumen output from 3600 to 9600 in either 4000K or 5000K, this wet listed fixture is perfect to increase safety and security around your outdoor application.

### DESIGN FEATURES

#### Construction

- Die-cast aluminum housing and back box
- High efficiency, UV-resistant fresnel lens for reduced glare

#### Electrical

- 120-277V | PF = >0.9
- Photocell included: default=connected; disconnect is optional
- Operating temperature: -22°F (-30°C) to 104°F (40°C)
- 4432-1-30: 30W | 3600 lms | HID Equivalent - 150W
- 4432-1-60: 60W | 7200 lms | HID Equivalent - 250W
- 4432-1-80: 80W | 9600 lms | HID Equivalent - 350W
- L70 > 100,000 Hours
- 4000K or 5000K | 80 CRI
- 100° beam angle

#### Installation

- Wall Mounted back box in standard J-Box application
- Adjustable 0°-90° light-engine housing with scale on side for easy positioning

#### Weight

- 4432-1-30 - 3.0 lbs
- 4432-1-60 - 4.9 lbs
- 4432-1-80 - 4.9 lbs

#### Certifications

- cETLus Listed for wet location
- IP65 rated for wet location
- DLC Listed
- LED Lamp: 5 Year Limited Warranty
- Non-electrical: 1 Year Limited Warranty

ORDERING GUIDE		Example: 4432-10B-30-4K	
Model #	Finish	Watts	CCT
4432-1	OB		
4432-1	OB : Oil Rubbed Bronze	-30 : 30W -60 : 60W -80 : 80W	-4K : 4000K -5K : 5000K

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.



10/19/2020 R1

