


# 4117-1 Series

120-277V Universal Voltage

Catalog #:		Type
Project:		Date
Prepared by:		

## LED 4' Linear Vapor Tight

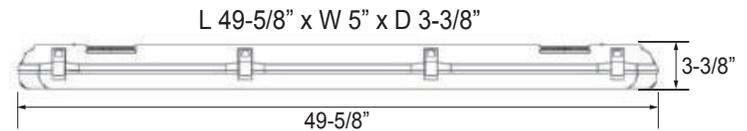

### DESCRIPTION

A low-profile, cost effective and energy efficient alternative to fluorescents, this LED Vapor Tight luminaire features a full-length, gasketed polycarbonate lens and single piece non-corrosive (PC) Polycarbonate body. This fixture is designed to meet or exceed IP65 ratings against dust and pressurized water jets. Ideal for places where dirt, humidity, dust, and cold temperatures reside. Increase energy savings with the optional built-in Daylight/Occupancy sensor that can be set for either detecting minimum Daylight levels or motion for Occupancy.

### DESIGN FEATURES

#### Construction

- Single piece polycarbonate body
- Gasketed UV resistant polycarbonate lens
- Stainless Steel latches included

#### Electrical

- 120-277V Universal Voltage
- Operating Temperature: -22°F to 122°F
- 50,000 hour projected life
- 0-10V Dimming | 4000K | 80 CRI
- 35W | 3675 lms (delivered)
- 50W | 5250 lms (delivered)
- 70W | 7350 lms (delivered)

#### Emergency (EM) Option

- RP Lighting 4782EM emergency battery back up factory installed (see separate 4782EM spec sheet for further details)
- Emergency Wattage Output = 9W
- Emergency Lumen Output = 9W x fixture L/W

#### Installation

- Surface mount with included removable, snap-in mounting brackets
- Suspended installation with included wire support arms
- Tool-less lens lock system for easy wiring access
- 1/2" conduit access on either end

#### Dimensions

- 49-5/8" L x 5" W x 3-3/8" D

#### Daylight/Occupancy Sensor (MS) Option

- Microwave Sensor installed behind lens
- Daylight Sensor (factory default = Disabled)
  - Ambient Range = 0.5 foot-candle - 14 foot-candle
  - Stand-by Dimming Level = 10%, 20%, or 50%
- Occupancy Sensor
  - Detection Area (factory default = 100%)
    - Settings = 10%; 50%; 75%; 100%
  - Hold Time at 100% (factory default = 30 seconds)
    - Settings = 5s, 30s, 1m, 3m, 20m, 30m
  - Stand-by (factory default = 5 seconds)
    - Settings = 0s, 5s, 5m, 30m, 60m
- See Installation Instructions for further details

#### Certifications

- CSAus Listed for wet location
- DLC 5.1 Listed
- IP65 rated against dust and water
- LED Light Source: 5 Year Limited Warranty

#### ORDERING GUIDE

Example: 4117-1-WH-50-4K-MS-EM

Model #	Finish	Watts	CCT	Sensor Option	EM Option
4117-1	-WH		-4K		
4117-1	-WH : White	-35 : 35W -50 : 50W -70 : 70W	-4K : 4000K	blank: No Sensor -MS : Microwave Sensor	blank: No Sensor -EM : add Emergency battery back-up



LED Light Source Other Components

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

3/1/23 R4



RP LIGHTING · FANS

4117-1 - LED 4' Linear Vapor Tight