


1RP69LED

120V

| | | |
|--------------|--|------|
| Catalog #: | | Type |
| Project: | | Date |
| Prepared by: | | |

LED Ceiling Fan Light Kit, Wet Location Listed

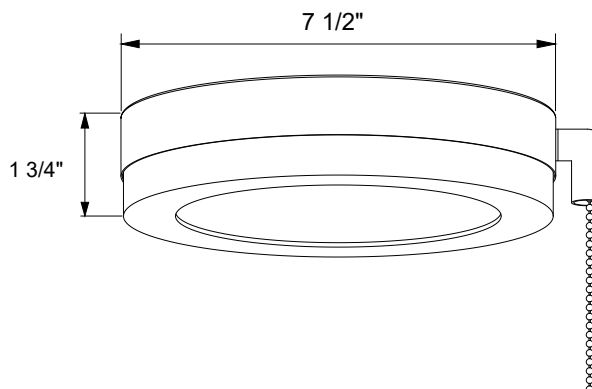

DESCRIPTION

The 1RP69LED Wet Location Listed ceiling fan light kit can be added to a number of different RP Lighting + Fans wet listed ceiling fans for a complete solution for outdoor applications. This light kit can be controlled via the standard pull chain or there are remote or wall control options for the ceiling fan and light together.

DESIGN FEATURES

Construction

- Durable Aluminum Frame
- Acrylic lens to diffuse glare

Electrical

- 120V-60Hz
- 50,000 hour projected life
- 12W | 700 lms (delivered) | 3000K | 90 CRI | Dimmable Triac or ELV, 10-100%
- 120° beam angle

Dimensions

- 1-3/4" H x 7-5/8" W

Wet Listed Ceiling Fans (sold separately)

- 1015W
- 1016W
- 1037
- 1067
- 1069
- 1069
- 1070W
- 1080W

Controls

- Pull Chain Standard
- Optional Remote Control (sold separately; indoor use only) RC-10
- Optional Wall Control (sold separately; indoor use only) WC-8 | WC-16

Certifications

- CEC JA8 Compliant
- cETLus listed for wet location
- LED Light Source: 5 Year Limited Warranty
- Non-Electrical: 1 Year Limited Warranty

ORDERING GUIDE

Example: 1RP69LED-MBK

| Model # | Finish |
|-----------|--|
| 1RP69LED- | |
| 1RP69LED- | BP : Brushed Pewter MBK : Matte Black OB : Oil Rubbed Bronze WW : White |

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



Intertek

Light Source

Non-Electrical

3/15/23 R4



RP | LIGHTING • FANS

1RP69LED - LED Ceiling Fan Light Kit