RP | LIGHTING · FANS

CATALOG VOL. 3

Over 30 Years
Experience

Quality Product Priced Right

Apartments, Assisted Living, Dorms

Your Multi-Family Specialists

Value Engineering
Light Commercial

For over 30 years, RP Lighting + Fans has been a valued supplier of ceiling fans and lighting fixtures to electrical distributors and lighting showrooms. In that time our product offering has grown to encompass all types of lighting fixtures typically installed in multi-family or mixed use facilities, as well as many LED fixtures applicable for light commercial installations.

With our Headquarters located in Albuquerque, NM and several strategically placed warehouses across the country, RP provides fast and efficient delivery to our customers when and where they need it.

RP Lighting + Fans is committed to continuously expanding its catalog of quality products that our customers require. This volume 3.0 catalog presents our latest offering of energy efficient, high quality products priced right.

Sections

Ceiling Fans..... 6 - 56

Fans..... 10 - 45

Light Kits..... 46 - 50

Controls..... 51

Specifications..... 52 - 56

Recessed Lighting..... 58 - 103

Commercial Recessed..... 62 - 76

Residential Recessed..... 78 - 96

Recessed Alternative..... 97 - 102

Wall / Ceiling Mount..... 104 - 122

Vanity Lighting..... 124 - 131

Decorative Suspended..... 132 - 139

Linear Lighting..... 140 - 149

Exit & Emergency Lighting..... 150 - 167

Outdoor Lighting..... 168 - 181

Step Lighting..... 182 - 184

Track Lighting..... 186 - 195

Ceiling Fans

Ceiling Fan Overview

Contemporary Fans

1079LED/1079-E26-L
Contempo
3-Blade 50” Ceiling Fan
Page 10

1078LED/1078-E26-L
Contempo I
3-Blade 50” Ceiling Fan
Page 11

1049LED/1049-E26-L
Contempo II
3-Blade 44” Ceiling Fan
Page 12

1043LED
Contempo IV
3-Blade 52” Ceiling Fan
Page 13

1008LED/1004-E26-L
Europa
4-Blade 50” Ceiling Fan
Page 14

1007LED/1007-E26-L
Europa I
4-Blade 50” Ceiling Fan
Page 15

1041LED/1041-E26-L
Europa II
4-Blade 44” Ceiling Fan
Page 16

1044LED
Europa IV
4-Blade 52” Ceiling Fan
Page 17

1005LED/1005-E26-L
Mirage
5-Blade 50” Ceiling Fan
Page 18

1025LED/1025-E26-L
Mirage I
5-Blade 50” Ceiling Fan
Page 19

1042LED/1042-E26-L
Mirage II
5-Blade 44” Ceiling Fan
Page 20

1045LED
Mirage IV
5-Blade 52” Ceiling Fan
Page 21

1074/1074LED
Aldea II
3-Blade 52” Ceiling Fan
Page 22

1046/1046LED
Aldea III
3-Blade 52” Ceiling Fan
Page 23

1071/1071LED
Aldea
4-Blade 52” Ceiling Fan
Page 24

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Ceiling Fan Overview

Contemporary Fans (cont.)

1047/1047LED
Aldea IV
4-Blade 52” Ceiling Fan
Page 25

1065/1065LED
Aldea V
5-Blade 52” Ceiling Fan
Page 26

1048/1048LED
Aldea VI
5-Blade 52” Ceiling Fan
Page 27

1021
Sabio
3-Blade 42” Hugger Fan
Page 28

1022
Sabio
3-Blade 52” Hugger Fan
Page 28

1023
Metalis
4-Blade 42” Hugger Fan
Page 29

1024
Metalis
4-Blade 52” Hugger Fan
Page 29

1073/1073LED
Torque
3-Blade 52” Ceiling Fan
Page 30

1072/1072LED
Colibri
3-Blade 60” Ceiling Fan
Page 31

Wet Listed Fans

1067
Aldea VII
3-Blade 52” Ceiling Fan
Page 32

1068
Aldea VIII
4-Blade 52” Ceiling Fan
Page 33

1069
Aldea IX
5-Blade 52” Ceiling Fan
Page 34

1015W
Sunset
5-Blade 52” Ceiling Fan
Page 35

1016W
Sunset II
5-Blade 42” Ceiling Fan
Page 36

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Ceiling Fan Overview

Industrial Fans

1070W/1080W
Arctic
7-Blade 70” & 80” Ceiling Fan
Page 37

1088/1088LED
Rio Grande
3-Blade 88” Ceiling Fan
Page 38

1091
Industrial Fan
3-Blade 56” Ceiling Fan
Page 39

Traditional Fans

1057-L
Star Light
5-Blade 52” Ceiling Fan
Page 40

1032
Desert Moon
5-Blade 52” Ceiling Fan
Page 41

1052
Royal Star
5-Blade 52” Ceiling Fan
Page 42

1053
Royal Knight
5-Blade 42” Ceiling Fan
Page 43

1054
Royal Knight
5-Blade 30” Ceiling Fan
Page 43

1062-1
Royal Knight Hugger
5-Blade 52” Hugger Fan
Page 44

1063-1
Royal Knight Hugger
5-Blade 42” Hugger Fan
Page 44

1064-1
Royal Knight Hugger
5-Blade 30” Hugger Fan
Page 44

1051
Caribbean
5-Blade 52” Ceiling Fan
Page 45

Warranty Information

Fan Motor

Integrated LED Light Kits

E26 A19 LED Light Kits
Other Components

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Contempo

1079-E26 | Intertek | Fan Motor

- AC Motor | 3 Speed | Reversible
- 3 Plywood Blades | 12° pitch | 4” Downrod
- Pull Chain Standard
- 50” Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1079-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1079LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable

Brushed Nickel Motor / Brushed Nickel Blades

Brushed Nickel Motor / Walnut Blades

Black Motor / Black Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

White Motor / White Blades

Matte Black Motor / Matte Black Blades

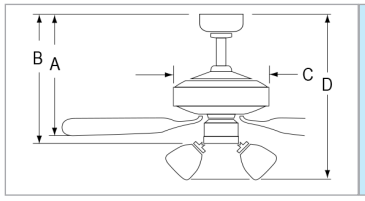

Dimensions

1079LED	1079-E26-L
A: 10-1/4”	A: 10-1/4”
B: -	B: -
C: 10”	C: 10”
D: 15-1/4”	D: 16”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1079LED **1079-E26-L**	5204	57.74	120V

ORDERING GUIDE

Example: 1079LED-BN-BN

Model	Motor / Blade Finish	
1079LED- 50” Sweep with integral LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-WT	Oil Rubbed Bronze / Oil Rubbed Bronze
	OB-OB	Black / Black
	BK-BK	Matte Black / Matte Black
	MBK-MBK	White / White
	WW-WW	

Example: 1079BN-BN-E26-L

Model	Motor / Blade Finish		Socket Base	Light Kit
1079 50” Sweep with E26 LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel	**-E26** socket base	**-L** A19 LED Lamps Included
	BN-WT	Brushed Nickel / Walnut		
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze		
	BK-BK	Black / Black		
	MBK-MBK	Matte Black / Matte Black		
	WW-WW	White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Contempo I

1078-E26 | Intertek | Fan Motor

- AC Motor | 3 Speed | Reversible
- 3 Plywood Blades | 12 ° Pitch | 4” Downrod
- Pull Chain Standard
- 50” Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1078-E26-L: E26 LED Light Kit; 2x9W A19 LED lamps included, 3000K, Dimmable
- 1078LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable

Black Motor / Black Blades

Brushed Nickel Motor / Brushed Nickel Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

White Motor / White Blades

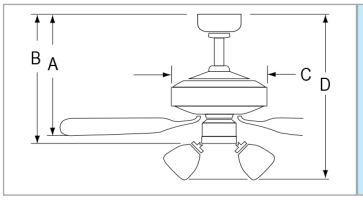

Dimensions

1078LED	1078-E26-L
A: 10-1/2”	A: 10-1/2”
B: -	B: -
C: 10”	C: 10”
D: 15-1/4”	D: 16”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1078LED **1078-E26-L**	5449	57.26	120V

ORDERING GUIDE

Example: 1078LED-BN-BN

Model	Motor / Blade Finish	
1078LED- 50” Sweep with integral LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	BK-BK	Black / Black
	WW-WW	White / White

Example: 1078BN-BN-E26-L

Model	Motor / Blade Finish		Socket Base	Light Kit
1078 50” Sweep with E26 LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel	**-E26** socket base	**-L** A19 LED Lamps Included
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze		
	BK-BK	Black / Black		
	WW-WW	White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Contempo II

1049-E26 | Intertek | Fan Motor

- AC Motor | 3 Speed | Reversible
- 3 Plywood Blades | 12° pitch | 4” Downrod
- Pull Chain Standard
- 44” Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1049-E26-L: E26 LED Light Kit; 2x9W A19 LED lamps included, 3000K, Dimmable
- 1049LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

Black Motor / Black Blades

Brushed Nickel Motor / Brushed Nickel Blades

White Motor / White Blades

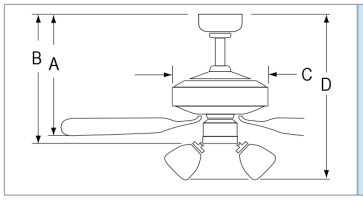

Dimensions
A: 10-1/4”
B: -
C: 10”
D: 15-1/4”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1049LED **1049-E26-L**	4361	47.71	120V

ORDERING GUIDE

Example: 1049LED-BN-BN

Model	Motor / Blade Finish	
1049LED- 44” Sweep with integral LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	BK-BK	Black / Black
	WW-WW	White / White

Example: 1049BN-BN-E26-L

Model	Motor / Blade Finish		Socket Base	Light Kit
1049 44” Sweep with E26 LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel	**-E26** socket base	**-L** A19 LED Lamps Included
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze		
	BK-BK	Black / Black		
	WW-WW	White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Contempo IV

Fan Motor

- AC Motor | 3 Speed | Reversible
- 3 Plywood blades | 12° pitch | 4” downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Integral LED Light Kit: satin white glass, 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, dimmable
- Energy Star 4.0 Compliant

Brushed Nickel Motor / Brushed Nickel Blades

Black Motor / Black Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

White Motor / White Blades

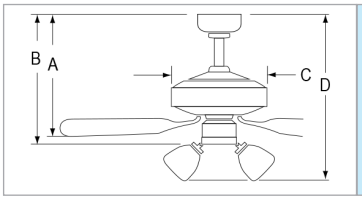

Dimensions
A: 10-1/4”
B: -
C: 10”
D: 15-1/4”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1043LED	5540	49	120V

ORDERING GUIDE

Example: 1043LED-BN-BN

Model	Motor / Blade Finish	
1043LED- 52” Sweep, with Integral LED Light KIt	**BN-BN**	Brushed Nickel / Brushed Nickel
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	BK-BK	Black / Black
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Europa

Intertek

Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 Plywood Blades | 12° pitch | 4” downrod
- Pull Chain Standard
- 1004-E26-L: 50” Sweep | 153 x 15mm
- 1008LED: 50” Sweep | 153 x 15mm
- Remote and Wall Control Optional
- 1004-E26-L: E26 LED Light Kit; 2x9W A19 LED lamps included, 3000K, Dimmable
- 1008LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable; JA8/Title 24 Compliant

Brushed Nickel Motor / Brushed Nickel Blades

Matte Black Motor / Matte Black Blades

Black Motor / Black Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

Brushed Nickel Motor / Walnut Blades

White Motor / White Blades

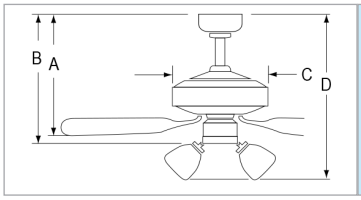

Dimensions

1004-E26-L	1008LED
A: 10-1/4”	A: 10-1/4”
B: -	B: -
C: 10”	C: 10”
D: 16”	D: 15-1/4”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1008LED 1004-E26-L	5351	61.96	120V

ORDERING GUIDE

Example: 1008LED-BN-BN

Model	Motor / Blade Finish	
1008LED- 50” Sweep with Integral LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-WT	Brushed Nickel / Walnut
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	BK-BK	Black / Black
	MBK-MBK	Matte Black / Matte Black
	WW-WW	White / White

Example: 1004BN-BN-E26-L

Model	Motor / Blade Finish		Socket Base	Light Kit
1004 50” Sweep with E26 LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel	**-E26** socket base	**-L** A19 LED Lamps Included
	BN-WT	Brushed Nickel / Walnut		
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze		
	BK-BK	Black / Black		
	MBK-MBK	Matte Black / Matte Black		
	WW-WW	White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Europa I

1007-E26 | Intertek | Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 Curved Plywood Blades | 12° pitch | 4” downrod
- Pull Chain Standard
- 50” Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1007-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1007LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable

Oil Rubbed Bronze Finish / Oil Rubbed Bronze Blades

Black Motor / Black Blades

Brushed Nickel Motor / Brushed Nickel Blades

White Motor / White Blades

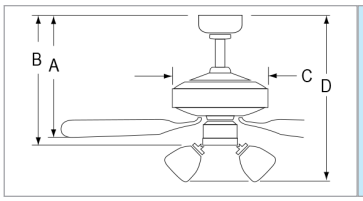

Dimensions

1007LED	1007-E26-L
A: 10-1/2”	A: 10-1/2”
B: -	B: -
C: 10”	C: 10”
D: 15-1/4”	D: 16”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1007LED **1007-E26-L**	5300	58.66	120V

ORDERING GUIDE

Example: 1007LED-BN-BN

Model	Motor / Blade Finish	
1007LED- 50” Sweep with Integral LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	BK-BK	Black / Black

Example: 1007BN-BN-E26-L

Model	Motor / Blade Finish		Socket Base	Light Kit
1007 50” Sweep with E26 LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel	**-E26** socket base	**-L** A19 LED Lamps Included
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze		
	BK-BK	Black / Black		
	WW-WW	White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Europa II

1041-E26 | Intertek | Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 Plywood Blades | 12° pitch | 4” downrod
- Pull Chain Standard
- 44” Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1041-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1041LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable

White Motor / White Blades

Black Motor / Black Blades

Brushed Nickel Motor / Brushed Nickel Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

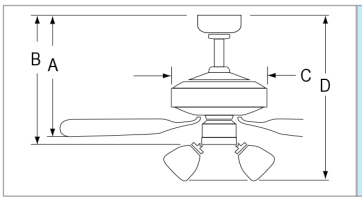

Dimensions
A: 10-1/4”
B: -
C: 10”
D: 15-1/4”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1041LED **1041-E26-L**	4255	49.48	120V

ORDERING GUIDE

Example: 1041LED-BN-BN

Model	Motor / Blade Finish	
1041LED- 44” Sweep with Integral LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BK-BK	Black / Black
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW	White / White

Example: 1041BN-BN-E26-L

Model	Motor / Blade Finish		Socket Base	Light Kit
1041 44” Sweep with E26 LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel	**-E26** socket base	**-L** A19 LED Lamps Included
	BK-BK	Black / Black		
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze		
	WW-WW	White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Europa IV

Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 Plywood Blades | 12° pitch | 4” downrod
- Pull Chain Standard
- 52” Sweep | 172 x 14mm
- Remote or Wall Control Optional
- Energy Star 4.0 Listed
- Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable

Brushed Nickel Motor / Brushed Nickel Blades

White Motor / White Blades

Black Motor / Black Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

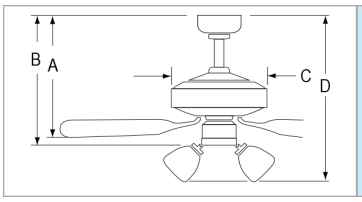

Dimensions
A: 10-1/4”
B: -
C: 10”
D: 15-1/4”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1044LED	5454	49.21	120V

ORDERING GUIDE

Example: 1044LED-BN-BN

Model	Motor / Blade Finish	
1044LED- 52” Sweep, AC Motor, Pull Chain, with Integral LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BK-BK	Black / Black
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Mirage

1005-E26 | Intertek | Fan Motor

- AC Motor | 3-Speed | Reversible
- 5 Plywood Blades | 12° pitch | 4” downrod
- Pull Chain Standard
- Remote Control Optional
- 50" Sweep | 153 x 15mm
- 1005-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1005LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable

Brushed Nickel Motor / Brushed Nickel Blades

Matte Black Motor / Matte Black Blades

Black Motor / Black Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

White Motor / White Blades

Brushed Nickel Motor / Walnut Blades

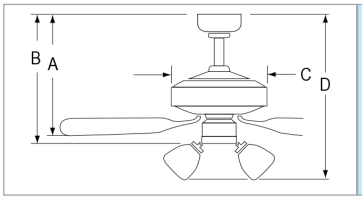

Dimensions

1005LED	1005-E26-L
A: 10-1/4”	A: 10-1/4”
B: -	B: -
C: 10”	C: 10”
D: 15-1/4”	D: 16”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1005LED **1005-E26-L**	5149	59.6	120V

ORDERING GUIDE

Example: 1005LED-BN-BN

Model	Motor / Blade Finish	
1005LED- 50” Sweep with integral LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-WT	Brushed Nickel / Walnut
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	BK-BK	Black / Black
	MBK-MBK	Matte Black / Matte Black
	WW-WW	White / White

Example: 1005BN-BN-E26-L

Model	Motor / Blade Finish		Socket Base	Light Kit
1005 50” Sweep with E26 LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel	**-E26** socket base	**-L** A19 LED Lamps Included
	BN-WT	Brushed Nickel / Walnut		
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze		
	BK-BK	Black / Black		
	MBK-MBK	Matte Black / Matte Black		
	WW-WW	White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Mirage I

1025-E26 | Intertek | Fan Motor

- AC Motor | 3-Speed | Reversible
- 5 Curved Plywood Blades | 12° pitch | 4” downrod
- Pull Chain Standard
- Remote or Wall Control Optional
- 50" Sweep | 153 x 15mm
- 1025-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1025LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable

Brushed Nickel Motor / Brushed Nickel Blades



Black Motor / Black Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

White Motor / White Blades

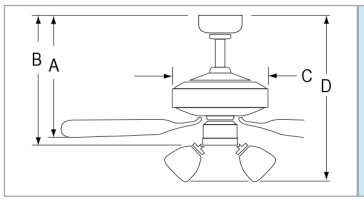

Dimensions

1025LED	1025-E26-L
A: 10-1/2”	A: 10-1/2”
B: -	B: -
C: 10”	C: 10”
D: 15-1/4”	D: 16”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1025LED 1025-E26-L	5246	59.23	120V

ORDERING GUIDE

Example: 1025LED-BN-BN

Model	Motor / Blade Finish	
1025LED- 50” Sweep with integral LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BK-BK	Black / Black
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW	White / White

Example: 1025BN-BN-E26-L

Model	Motor / Blade Finish		Socket Base	Light Kit
1025 50” Sweep with E26 LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel	**-E26** socket base	**-L** A19 LED Lamps Included
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze		
	WW-WW	White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Mirage II

1042-E26 | Intertek | Fan Motor

- AC Motor | 3-Speed | Reversible
- 5 Plywood Blades | 12° pitch | 4” downrod
- Pull Chain Standard
- Remote or Wall Control Optional
- 44" Sweep | 153 x 12mm
- 1042-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1042LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

Brushed Nickel Motor / Walnut Blades

Brushed Nickel Motor / Brushed Nickel Blades

White Motor / White Blades

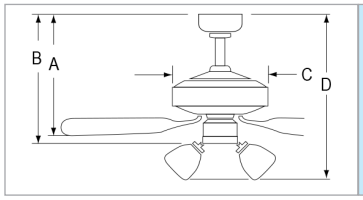

Dimensions
A: 10-1/4”
B: -
C: 10”
D: 15-1/4”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1042LED **1042-E26-L**	4020	48.63	120V

ORDERING GUIDE

Example: 1042LED-BN-WT

Model	Motor / Blade Finish	
1042LED- 44” Sweep with integral LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-WT	Brushed Nickel / Walnut
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW	White / White

Example: 1042BN-WT-E26-L

Model	Motor / Blade Finish		Socket Base	Light Kit
1042 44” Sweep with E26 LED Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel	**-E26** socket base	**-L** A19 LED Lamps Included
	BN-WT	Brushed Nickel / Walnut		
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze		
	WW-WW	White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Mirage IV

Fan Motor

- AC Motor | 3-Speed | Reversible
- 5 Plywood Blades | 12° pitch | 4” downrod
- Pull Chain Standard
- 52” Sweep | 172 x 14mm
- Remote or Wall Control Optional
- Energy Star 4.0 Listed
- Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable

Brushed Nickel Motor / Brushed Nickel Blades

Black Motor / Black Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

White Motor / White Blades

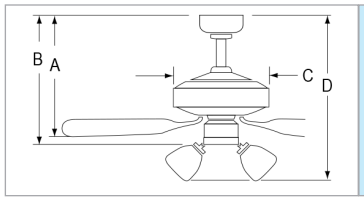

Dimensions
A: 10-1/4”
B: -
C: 10”
D: 15-1/4”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1045LED	5224	50.16	120V

ORDERING GUIDE

Example: 1045LED-BN-BN

Model	Motor / Blade Finish
1045LED- 52” Sweep, with Integral LED Light Kit	**BN-BN** Brushed Nickel / Brushed Nickel **BK-BK** Black / Black **OB-OB** Oil Rubbed Bronze / Oil Rubbed Bronze **WW-WW** White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea II

Intertek

Fan Motor

- AC Motor | 3-Speed | Reversible
- 3 MDF Blades | 11° pitch | 4” downrod
- Pull Chain Standard
- 52” Sweep | 153 x 12mm
- Remote or Wall Control Optional
- 1074: Light Kit Adaptable
- 1074LED: Integral LED Light Kit: 16 W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable

1074 Brushed Nickel Motor / Brushed Nickel Blades

1074LED

Oil Rubbed Bronze Motor / Walnut Blades

Brushed Nickel Motor / Brushed Nickel Blades

Brushed Nickel Motor / Walnut Blades

White Motor / White Blades

Matte Black Motor / Matte Black Blades

1074

Oil Rubbed Bronze Motor / Walnut Blades

Brushed Nickel Motor / Walnut Blades

White Motor / White Blades



Matte Black Motor / Matte Black Blades

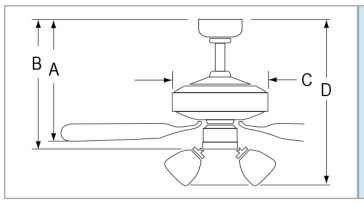

Dimensions

1074	1074LED
A: 9-3/4”	A: 9-3/4”
B: 12-1/4”	B: 13”
C: 6-7/8”	C: 6-7/8”
D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1074	5062	57.38	120V
1074LED	5062	57.45	

ORDERING GUIDE

Example: 1074BN-BN or 1074LED-BN-BN

Model	Motor / Blade Finish	
1074 52” Sweep, Pull Chain Light Kit Adaptable **1074LED-** 52” Sweep, Pull Chain Integrated Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-WT	Brushed Nickel / Walnut
	MBK-MBK	Matte Black / Matte Black
	OB-WT	Oil Rubbed Bronze / Walnut
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea III

1046 1046LED Fan Motor

- AC Motor | 3-Speed | Reversible
- 3 MDF Blades | 11° pitch | 4” downrod
- Pull Chain Standard
- 52” Sweep | 172 x 14mm
- Remote or Wall Control Optional
- 1046: Light Kit Adaptable
- 1046LED: Integral LED Light Kit: 16W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable

1046LED Oil Rubbed Bronze Motor / Walnut Blades

1046

Oil Rubbed Bronze Motor / Walnut Blades

1046LED

Brushed Nickel Motor / Brushed Nickel Blades

Brushed Nickel Motor / Brushed Nickel Blades

Brushed Nickel Motor / Walnut Blades

Brushed Nickel Motor / Walnut Blades

White Motor / White Blades

White Motor / White Blades

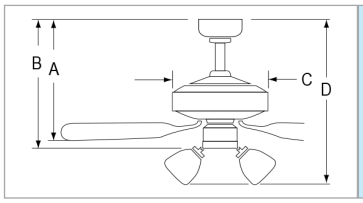

Dimensions

1046	1046LED
A: 9-3/4”	A: 9-3/4”
B: 12-1/4”	B: 12-1/4”
C: 7-5/8”	C: -
D: -	D: 13”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1046	5538	50	120V
1046LED	5531	50.22	

ORDERING GUIDE

Example: 1046BN-BN or 1046LED-BN-BN

Model	Motor / Blade Finish	
1046 52” Sweep, Pull Chain Light Kit Adaptable **1046LED-** 52” Sweep, Pull Chain Integrated Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-WT	Brushed Nickel / Walnut
	OB-WT	Oil Rubbed Bronze / Walnut
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea

1071 Intertek Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 MDF Blades | 11° pitch | 4” downrod
- Pull Chain Standard
- 52” Sweep | 153 x 12mm
- Remote or Wall Control Optional
- Light Kit Adaptable
- 1071LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable
- 1071: Title 20 Compliant

1071LED Brushed Nickel Motor / Brushed Nickel Blades

1071LED

Oil Rubbed Bronze Motor / Walnut Blades

Brushed Nickel Motor / Brushed Nickel Blades

Brushed Nickel Motor / Walnut Blades

White Motor / White Blades

Matte Black Motor / Matte Black Blades

1071

Oil Rubbed Bronze Motor / Walnut Blades

Brushed Nickel Motor / Walnut Blades

White Motor / White Blades

Matte Black Motor / Matte Black Blades

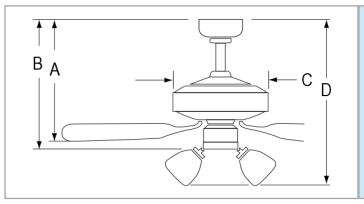

Dimensions

1071	1071LED
A: 9-3/4”	A: 9-3/4”
B: 12-1/4”	B: 13”
C: 6-7/8”	C: 6-7/8”
D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1071	4899	57	120V
1071LED	4945	57.63	

ORDERING GUIDE

Example: 1071BN-BN

Model	Motor / Blade Finish	
1071 52” Sweep, Pull Chain	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-WT	Brushed Nickel / Walnut
1071LED- 52” Sweep, Pull Chain Integrated Light Kit	**MBK-MBK**	Matte Black
	OB-WT	Oil Rubbed Bronze / Walnut
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea IV

1047 1047LED Intertek Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 MDF Blades | 11° pitch | 4” downrod
- Pull Chain Standard
- 52” Sweep | 172 x 14mm
- Remote or Wall Control Optional
- 1047LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable

1047LED: Brushed Nickel Motor / Walnut Blades

1047

Brushed Nickel Motor / Walnut Blades

Brushed Nickel Motor / Brushed Nickel Blades

1047LED

Brushed Nickel Motor / Brushed Nickel Blades

Oil Rubbed Bronze Motor / Walnut Blades

Oil Rubbed Bronze Motor / Walnut Blades

White Motor / White Blades

White Motor / White Blades

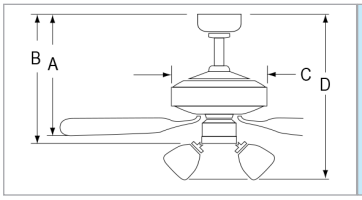

Dimensions

1047	1047LED
A: 9-3/4”	A: 9-3/4”
B: 12-1/4”	B: 12-1/4”
C: 7-5/8”	C: -
D: -	D: 13”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1047	5400	50.4	120V
1047LED	5420	50.5	

ORDERING GUIDE

Example: 1047BN-BN or 1047LED-BN-BN

Model	Motor / Blade Finish	
1047 52” Sweep, Pull Chain Light Kit Adaptable **1047LED-** 52” Sweep, Pull Chain Integrated Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-WT	Brushed Nickel / Walnut
	OB-WT	Oil Rubbed Bronze / Walnut
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea V

Intertek

Fan Motor

- AC Motor | 3-Speed | Reversible
- 5 MDF Blades | 11° pitch | 4” downrod
- Pull Chain Standard
- 52” Sweep | 153 x 12mm
- Remote or Wall Control Optional
- 1065LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable

1065LED: Brushed Nickel Motor / Brushed Nickel Blades

1065LED

Brushed Nickel Motor / Brushed Nickel Blades

Brushed Nickel Motor / Walnut Blades

1065

Brushed Nickel Motor / Walnut Blades

Oil Rubbed Bronze Motor / Walnut Blades

Oil Rubbed Bronze Motor / Walnut Blades

White Motor / White Blades



White Motor / White Blades

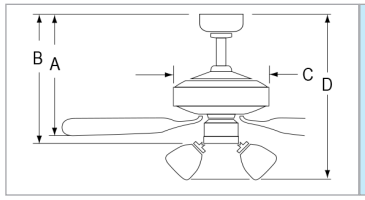

Dimensions

1065	1065LED
A: 9-3/4”	A: 9-3/4”
B: 12-1/4”	B: 12-1/4”
C: 7-5/8”	C: -
D: -	D: 13”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1065 **1065LED**	5156	58.64	120V

ORDERING GUIDE

Example: 1065BN-BN or 1065LED-BN-BN

Model	Motor / Blade Finish	
1065 52” Sweep, Pull Chain Light Kit Adaptable **1065LED-** 52” Sweep, Pull Chain Integrated Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-WT	Brushed Nickel / Walnut
	OB-WT	Oil Rubbed Bronze / Walnut
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea VI

1048 1048LED Intertek Fan Motor

- AC Motor | 3-Speed | Reversible
- 5 MDF Blades | 11° pitch | 4” downrod
- Pull Chain Standard
- 52” Sweep | 172 x 14mm
- Remote or Wall Control Optional
- 1048LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable

1048LED: Brushed Nickel Motor / Walnut Blades

1065

Brushed Nickel Motor / Walnut Blades

Brushed Nickel Motor / Brushed Nickel Blades

1065LED

Brushed Nickel Motor / Brushed Nickel Blades

Oil Rubbed Bronze Motor / Walnut Blades

Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades

White Motor / White Blades

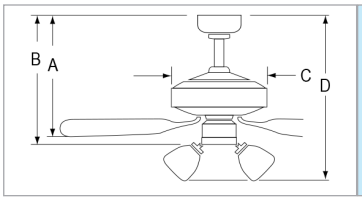

Dimensions

1065	1065LED
A: 9-3/4”	A: 9-3/4”
B: 12-1/4”	B: 12-1/4”
C: 7-5/8”	C: -
D: -	D: 13”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1048	5314	51	120V
1048LED	5333	51	

ORDERING GUIDE

Example: 1048BN-BN or 1048LED-BN-BN

Model	Motor / Blade Finish	
1048 52” Sweep, Pull Chain Light Kit Adaptable **1048LED-** 52” Sweep, Pull Chain Integrated Light Kit	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-WT	Brushed Nickel / Walnut
	OB-WT	Oil Rubbed Bronze / Walnut
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Sabio

LISTED

Fan Motor

- AC Motor | 3-speed | Reversible
- 3 MDF Blades | 12° pitch | Hugger
- Pull Chain Standard
- 1021-PC: 42” Sweep | 153 x 9mm
- 1022-PC: 52” Sweep | 153 x 14mm
- Remote or Wall Control Optional
- Integral LED Light Kit: 15W, 1521 lms (source), 789 lms (delivered), 3000K, 80 CRI, Dimmable

Brushed Nickel Motor / Walnut Blades

Brushed Nickel Motor / Brushed Nickel Blades

Oil Rubbed Bronze Motor / Walnut Blades

White Motor / White Blades

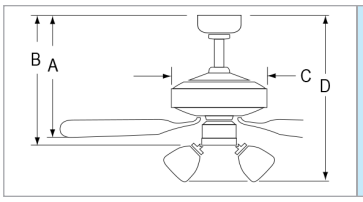

Dimensions
A: 8-1/2”
B: -
C: 7-1/2”
D: 10-7/8”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1021-PC	3214	43.57	120V
1022-PC	4498	55.94	

ORDERING GUIDE

Example: 1021BN-BN-PC

Model	Motor / Blade Finish	Control
1021 42” Sweep Hugger **1022** 52” Sweep Hugger	**BN-BN** Brushed Nickel / Brushed Nickel **BN-WT** Brushed Nickel / Walnut **OB-WT** Oil Rubbed Bronze / Walnut **WW-WW** White / White	**-PC** Pull chain included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Metalis

LISTED

Fan Motor

- AC Motor | 4-speed | Reversible
- 4 MDF Blades | 12° pitch | Hugger
- Pull Chain Standard
- 1023-PC: 42” Sweep | 153 x 9mm
- 1024-PC: 52” Sweep | 153 x 14mm
- Remote or Wall Control Optional
- Integral LED Light Kit: 15W, 1521 lms (source), 789 lms (delivered), 3000K, 80 CRI, Dimmable

Brushed Nickel Motor / Walnut Blades



Brushed Nickel Motor / Brushed Nickel Blades

Oil Rubbed Bronze Motor / Walnut Blades

White Motor / White Blades

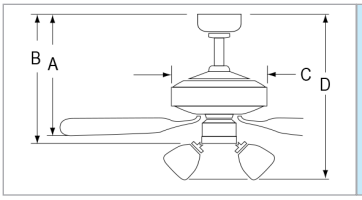

Dimensions
A: 8-1/2”
B: -
C: 7-1/2”
D: 10-7/8”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1023-PC	3002	42.83	120V
1024-PC	4486	56.79	

ORDERING GUIDE

Example: 1024BN-BN-PC

Model	Motor / Blade Finish	Control
1023 42” Sweep Hugger **1024** 52” Sweep Hugger	**BN-BN** Brushed Nickel / Brushed Nickel **BN-WT** Brushed Nickel / Walnut **OB-WT** Oil Rubbed Bronze / Walnut **WW-WW** White / White	**-PC** Pull chain included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Torque

Intertek

Fan Motor

- AC Motor | 3 Speed | Reversible
- 3 Wood blades | 11° pitch | 4” downrod
- Pull Chain Standard
- 52” Sweep | 153 x 18 mm
- Remote or Wall Control Optional
- 1073LED-PC: Integral LED Light Kit: 16W, 1293 lms (source), 908 lms (delivered), 3000K, 90 CRI, Dimmable

1073LED-PC Brushed Nickel Motor / Maple Blades

1073-PC

Oil Rubbed Bronze Motor / Walnut Blades

1073LED-PC

Oil Rubbed Bronze Motor / Walnut Blades

Brushed Nickel Motor / Maple Blades

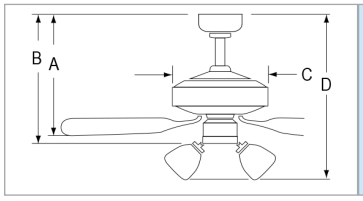

Dimensions

1073-PC	1073LED-PC
A: 9-1/2”	A: 9-1/2”
B: 12”	B: -
C: 6-1/2”	C: 6-1/2”
D: -	D: 13”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1073-PC **1073LED-PC**	5666	60	120V

ORDERING GUIDE

Example: 1073BN-WT-PC or 1073LED-BN-NM-PC

Model	Motor / Blade Finish	Pull Chain
1073 52” Sweep, Pull Chain **1073LED-** 52" Sweep, Pull Chain with Integral LED Light Kit	**BN-NM** Brushed Nickel / Natural Maple **OB-WT** Oil Rubbed Bronze / Walnut	**-PC** Pull Chain included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Colibri

Intertek

Fan Motor

- AC Motor | 3 Speed | Reversible
- 3 ABS blades | 11° pitch | 4” downrod
- Pull Chain Standard
- 60" Sweep | 188 x 12mm
- Remote or Wall Control Optional
- 1072LED-PC: Integrated LED Light Kit: 15W LED, 1461 lms (source), 1018 lms (delivered), 3000K, 90 CRI, Dimmable

1072LED-PC Brushed Nickel Motor / Natural Maple Blades

1072-PC

Oil Rubbed Bronze Motor / Walnut Blades

1072LED-PC

Oil Rubbed Bronze Motor / Walnut

Brushed Nickel Motor / Maple Blades

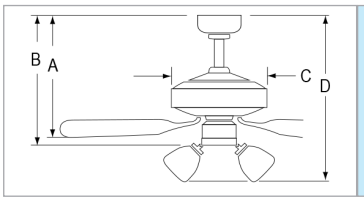

Dimensions

1072-PC	1072LED-PC
A: 8-1/2”	A: 9-31-32”
B: 11-1/2”	B: 13”
C: 9-1/4”	C: 9”
D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1072-PC	7827	65.46	120V
1072LED-PC	7681	61.18	

ORDERING GUIDE

Example: 1072BN-NM-PC or 1072LED-BN-NM

Model	Motor / Blade Finish	Pull Chain
1072 60” Sweep **1072LED-** 60" Sweep with Integral LED Light Kit	**BN-NM** Brushed Nickel / Natural Maple **OB-WT** Oil Rubbed Bronze / Walnut	**-PC** Pull Chain included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea VII

Fan Motor

- AC Motor | 3-Speed | Reversible
- 3 ABS Waterproof Blades
- 11° pitch | 4” downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Light Kit Adaptable with wet listed 1RP69LED Light Kit (sold separately)
- Wet Location Listed

Matte Black Motor / Matte Black Blades

Brushed Pewter Motor / Brushed Pewter Blades

White Motor / White Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

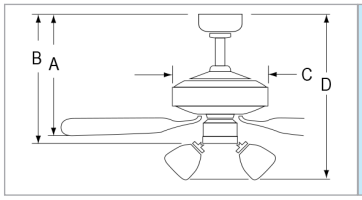

Dimensions
A: 9-7/8”
B: 12-3/8”
C: 7-5/8”
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1067	5600	50.9	120V

ORDERING GUIDE

Example: 1067BP-BP

Model	Motor / Blade Finish	
1067 52” Sweep, Pull Chain Light Kit Adaptable	**BP-BP**	Brushed Pewter / Brushed Pewter
	MBK-MBK	Matte Black / Matte Black
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea VIII

Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 ABS Waterproof Blades
- 11° pitch | 4” downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Light Kit Adaptable with wet listed 1RP69LED Light Kit (sold separately)
- Wet Location Listed

Matte Black Motor / Matte Black Blades

Brushed Pewter Motor / Brushed Pewter Blades

White Motor / White Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

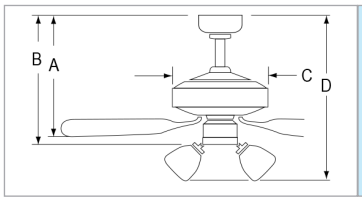

Dimensions
A: 9-7/8”
B: 12-3/8”
C: 7-5/8”
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1068	5500	50.5	120V

ORDERING GUIDE

Example: 1068BP-BP

Model	Motor / Blade Finish	
1068 52” Sweep, Pull Chain Light Kit Adaptable	**BP-BP**	Brushed Pewter / Brushed Pewter
	MBK-MBK	Matte Black / Matte Black
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea IX

Fan Motor

- AC Motor | 3-Speed | Reversible
- 5 ABS Waterproof Blades
- 11° pitch | 4” downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Light Kit Adaptable with wet listed 1RP69LED Light Kit (sold separately)
- Wet Location Listed

Matte Black Motor / Matte Black Blades

Brushed Pewter Motor / Brushed Pewter Blades

White Motor / White Blades



Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

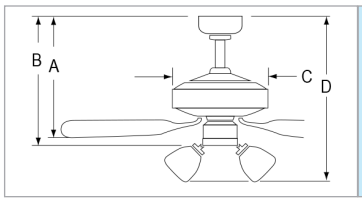

Dimensions
A: 9-7/8”
B: 12-3/8”
C: 7-5/8”
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1069	5197	50.28	120V

ORDERING GUIDE

Example: 1069BP-BP

Model	Motor / Blade Finish	
1069 52” Sweep, Pull Chain Light Kit Adaptable	**BP-BP**	Brushed Pewter / Brushed Pewter
	MBK-MBK	Matte Black / Matte Black
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Sunset

WET | UL LISTED | LIFE TIME LIMITED WARRANTY Fan Motor

- AC Motor | 3 Speed | Reversible
- 5 ABS blades | 12° pitch | 4” downrod
- 52" Sweep | 153 x 12mm
- Pull Chain Standard
- Light Kit Adaptable
- Wet Location Listed

Brushed Pewter Motor / Brushed Pewter Blades

Matte Black Motor / Matte Black Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades



White Motor / White Blades

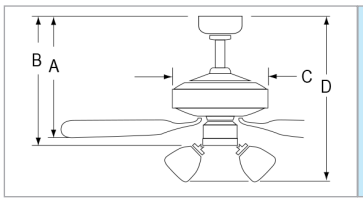

Dimensions
A: 11”
B: 12-5/8”
C: 11-1/2”
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1015W	4246	55.78	120V

ORDERING GUIDE

Example: 1015W-BN-BN

Model	Motor / Blade Finish	
1015W- 52” Sweep, Wet Listed	**BP-BP**	Brushed Pewter / Brushed Pewter
	MBK-MBK	Matte Black / Matte Black
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Sunset II

WET | UL LISTED | LIFE TIME LIMITED WARRANTY Fan Motor

- AC Motor | 3 Speed | Reversible
- 5 ABS blades | 12° pitch | 4” downrod
- 42" Sweep | 153 x 9mm
- Pull Chain Standard
- Light Kit Adaptable
- Wet Location Listed

Brushed Pewter Motor / Brushed Pewter Blades

White Motor / White Blades

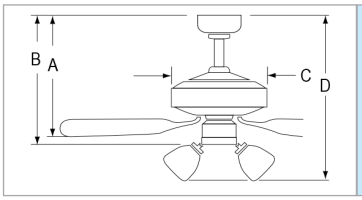

Dimensions
A: 10”
B: 11-1/2”
C: 9”
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1016W	3076	46.65	120V

ORDERING GUIDE

Example: 1016W-BP-BP

Model	Motor / Blade Finish	
1016W- 42” Sweep, Wet Listed	**BP-BP** **WW-WW**	Brushed Pewter / Brushed Pewter White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Arctic

WET | ENERGY STAR | UL LISTED | LIFE TIME Fan Motor

- DC Motor | 5-Speed | Reversible
- 7 Aluminum Blades | 18° pitch
- 8” & 24” downrod Included
- 1070W-WC: 70” Sweep | 180 x 17mm | WRC-70 Wall Control Included
- 1080W-WC: 80” Sweep | 180 x 17mm | WRC-80 Wall Control Included
- Energy Star 4.0 Compliant
- Wet Location Listed
- Light Kit Adaptable

Brushed Pewter Motor / Brushed Pewter Blades

White Motor / White Blades

Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades

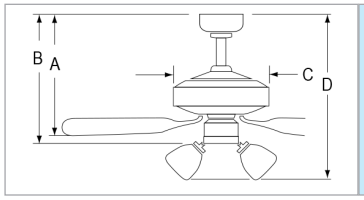

Dimensions

1070W	1080W
A: 11-1/4”	A: 11-1/4”
B: 17-1/4”	B: 17-1/4”
C: 8-3/4”	C: 8-3/4”
D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1070W	10012	39.92	120V
1080W	11274	46.94	

ORDERING GUIDE

Example: 1070W-BP-BP-WC

Model	Motor / Blade Finish	Control
1070W- 70” Sweep **1080W-** 80” Sweep	**BP-BP** Brushed Pewter / Brushed Pewter **OB-OB** Oil Rubbed Bronze / Oil Rubbed Bronze **WW-WW** White / White	**-WC** wall control included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Rio Grande

LISTED

Fan Motor

- DC Motor | 5-Speed | Reversible
- 3 Platane Curved Wood Blades | 16° pitch | 8” & 24” downrods included
- 88" Sweep | 155 x 20mm
- WCR-88 Wall Control Included
- 1088: Not Light Kit Adaptable
- 1088LED: Integral LED Light Kit: 16W, 1521 lms (source), 551 lms (delivered), 3000K, 80 CRI, Dimmable

Oil Rubbed Bronze / Walnut Blades

1088LED

Oil Rubbed Bronze Motor / Walnut Blades

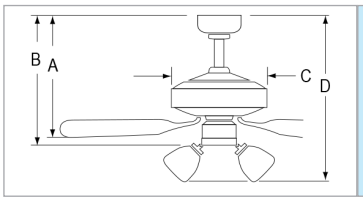

Dimensions

1088	1088LED
A: 14”	A: 14”
B: 16-3/8”	B: 16-3/8”
C: 5-15/16”	C: 5-15/16”
D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1088	10956	44.37	120V
1088LED	10066	44.37	

ORDERING GUIDE

Example: 1088OB-WT or 1088LED-OB-WT

Model	Motor / Blade Finish
1088 88” Sweep **1088LED-** 88" Sweep, Integral LED Light Kit	**OB-WT** Oil Rubbed Bronze / Walnut

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Industrial

Intertek

Fan Motor

- AC Motor | 1 Speed
- 3 Metal blades | 11° pitch | 12” downrod
- 56" Sweep | 194 x 16mm
- Multiple Speeds Available with Optional Wall Control
- Fan Motor: 10 Year Limited Warranty

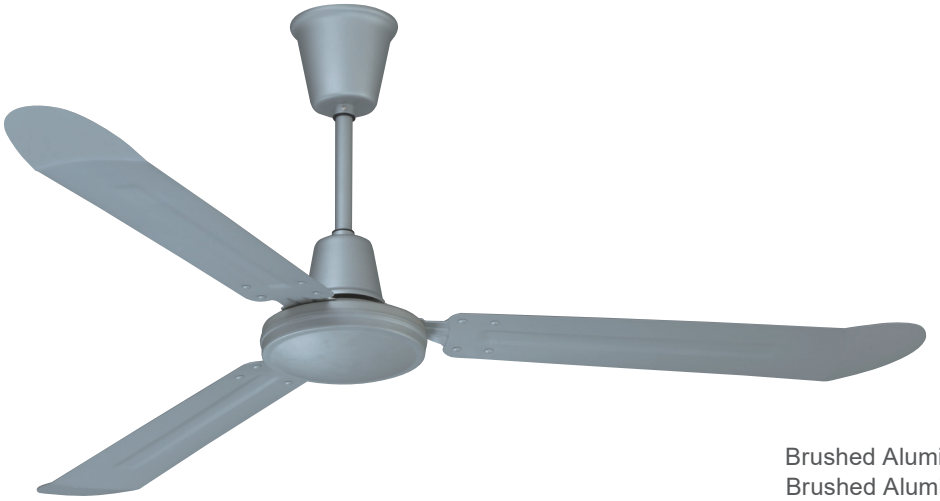

Brushed Aluminum Motor / Brushed Aluminum Blades

White Motor / White Blades

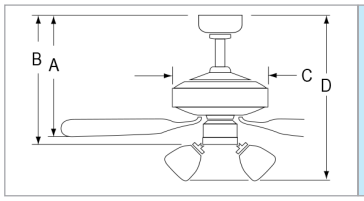

Dimensions
A: 19”
B: 21”
C: 8”
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1091	7876	58.9	120V

ORDERING GUIDE

Example: 1091BA-BA

Model	Motor / Blade Finish	
1091 56” Sweep	**BA-BA**	Brushed Aluminum / Brushed Aluminum
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Star Light

LISTED

Fan Motor

- AC Motor | 3 Speed | Reversible
- 5 MDF blades | 12° pitch | 4” downrod
- Pull Chain Standard
- 52" Sweep | 153 x 12mm
- Remote or Wall Control Optional
- UL Listed
- LED Light Kit Included: (3x) Candelabra E12 Socket, (3x) 4.5W LED bulbs included, 1050 lms (Delivered) 3000K, CRI 80, Dimmable

Matte Black Motor / Matte Black Blades

Brushed Nickel Finish / Walnut Blades

Oil Rubbed Bronze Finish / Walnut Blades

Matte White Finish / Matte White Blades

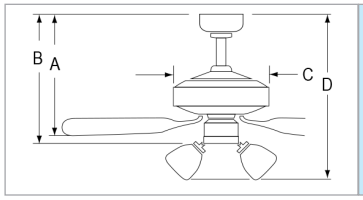

Dimensions
A: 9-3/4”
B: 12-1/4”
C: 11”
D: 18”

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1057-L	3020	39	120V

ORDERING GUIDE

Example: 1057BN-WT-L

Model	Motor / Blade Finish	Light Kit
1057 **52” Sweep, AC Motor, Pull Chain**	**BN-WT** **Brushed Nickel / Walnut*** **MBK** **Matte Black / Matte Black** **MWW** **Matte White / Matte White** **OB-WT** **Oil Rubbed Bronze / Walnut****	**-L** : Light Kit Included

* Brushed Nickel blade finish on one side and Walnut blade finish on other side

** Oil Rubbed Bronze blade finish on one side and Walnut blade finish on other side

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Desert Moon

Intertek

Fan Motor

- AC Motor | 3 Speed | Reversible
- 5 MDF blades | 11.5° pitch | 4” downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Light Kit Adaptable
- Energy Star 4.0 Compliant

Brushed Nickel Motor / Natural Maple Blades

Brushed Nickel Motor / Brushed Nickel Blades

Brushed Nickel Motor / Rosewood Blades

Brushed Nickel Motor / Walnut Blades

Oil Rubbed Bronze Motor / Walnut Blades

Brushed Nickel Motor / White Blades

White Motor / White Blades

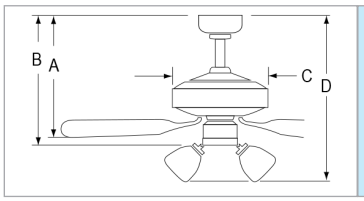

Dimensions
A: 11-7/8”
B: 12-5/8”
C: 11”
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1032	5017	49.84	120V

ORDERING GUIDE

Example: 1032BN-BN

Model	Motor / Blade Finish	
1032 52” Sweep, Pull Chain	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-NM	Brushed Nickel / Natural Maple
	BN-RW	Brushed Nickel / Rosewood
	BN-WW	Brushed Nickel / White
	BN-WT	Brushed Nickel / Walnut
	OB-WT	Oil Rubbed Bronze / Walnut
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Royal Star

Fan Motor

- AC Motor | 3 Speed | Reversible
- 5 MDF blades | 12° pitch | 4” downrod
- 52" Sweep | 153 x 12mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Light Kit Adaptable

Oil Rubbed Bronze Motor / Walnut Blades

White Finish / White Blades



Brushed Nickel Finish / Natural Maple Blades



Brushed Nickel Finish / White Blades

Brushed Nickel Finish / Brushed Nickel Blades

Brushed Nickel Finish / Walnut Blades

Brushed Nickel Finish / Rosewood Blades

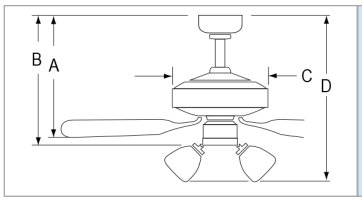

Dimensions
A: 10-1/16”
B: 11-5/8”
C: 11”
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1052	3020	39	120V

ORDERING GUIDE

Example: 1052BN-BN

Model	Motor / Blade Finish	
1052 52" Sweep, Pull Chain	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-NM	Brushed Nickel / Natural Maple
	BN-WT	Brushed Nickel / Walnut
	BN-WW	Brushed Nickel / White
	BN-RW	Brushed Nickel / Rosewoood
	OB-WT	Oil Rubbed Bronze / Walnut
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Royal Knight

LISTED

Fan Motor

- AC Motor | 3 Speed | Reversible
- 5 MDF blades | 12° pitch | 4” downrod
- Pull Chain Standard
- 1053: 42” Sweep | 153 x 9 mm
- 1054: 30" Sweep | 153 x 9 mm
- Remote or Wall Control Optional
- Light Kit Adaptable

Brushed Nickel Motor / Natural Maple Blades

White Motor / White Blades

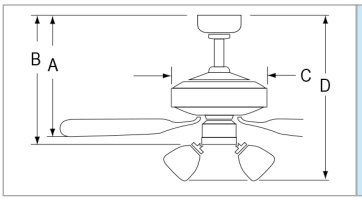

Dimensions
A: 9-3/4”
B: 11-1/2”
C: 9”
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1053	3195	47.41	120V
1054	2640	28	

ORDERING GUIDE

Example: 1054BN-BN

Model	Motor / Blade Finish	
1053 42" Sweep, Pull Chain **1054** 30" Sweep, Pull Chain	**BN-NM** **WW-WW**	Brushed Nickel / Natural Maple White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Royal Knight Hugger

LISTED

Fan Motor

- AC Motor | 3 Speed | Reversible
- 5 MDF blades | 12° pitch
- Pull Chain Standard
- 1062-1: 52” Sweep | 153 x 15mm
- 1063-1: 42” Sweep | 153 x 12mm
- 1064-1: 30” Sweep | 153 x 12mm
- Remote or Wall Control Optional
- Light Kit Adaptable

Brushed Nickel Motor / Natural Maple Blades

Oil Rubbed Bronze Motor / Walnut Blades

White Motor / White Blades



Dimmensions

1062-1	1063-1	1064-1
A: 5-3/4”	A: 5”	A: 5”
B: 8-1/4”	B: 8-1/2”	B: 8-1/2”
C: 11”	C: 9-1/5”	C: 9-1/5”
D: -	D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1062-1	2608	47.04	120V
1063-1	2684	43.83	
1064-1	2122	40.8	

ORDERING GUIDE

Example: 1062-1BN-NM

Model	Motor / Blade Finish	
1062-1 52” Sweep Hugger	**BN-NM**	Brushed Nickel / Natural Maple
1063-1 42” Sweep Hugger	**OB-WT**	Oil Rubbed Bronze / Walnut
1064-1 30” Sweep Hugger	**WW-WW**	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Caribbean

Fan Motor

- AC Motor | 3 Speed | Reversible
- 5 MDF blades | 12° pitch | 4” Downrod
- Pull Chain Standard
- 52” Sweep | 153 x 12mm
- Remote or Wall Control Optional
- Light Kit Adaptable

Brushed Nickel Motor / Brushed Nickel Blades

White Motor / White Blades



Brushed Nickel Motor / Natural Maple Blades

Oil Rubbed Bronze Motor / Walnut Blades

Brushed Nickel Motor / Walnut Blades

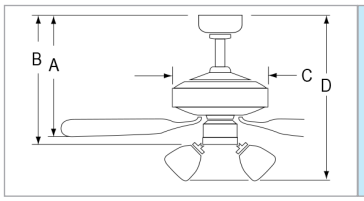

Dimensions
A: 11-1/4”
B: 12-3/5”
C: 11-3/5”
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1051	4180	65.74	120V

ORDERING GUIDE

Example: 1051BN-NM

Model	Motor / Blade Finish	
1051 52” Sweep	**BN-BN**	Brushed Nickel / Brushed Nickel
	BN-NM	Brushed Nickel / Natural Maple
	BN-WT	Brushed Nickel / Walnut
	OB-WT	Oil Rubbed Bronze / Walnut
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Energy Star Ceiling Fan Light Kit

3 YEAR WARRANTY Lamp Only

1 YEAR WARRANTY Light Kit Only

- 120V-60Hz
- 2 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- Shade: Satin White Glass
- Replacement Glass: 1RP8X-G
- Energy Star 4.0 Compliant
- cETLus Listed for damp location

White (WW)



Brushed Nickel (BN)

Oil Rubbed Bronze (OB)

Black (BK)

ORDERING GUIDE Example: 1RP8BN-ES

Model	Finish	Energy Star
1RP8	**BN** Brushed Nickel **BK** Black **OB** Oil Rubbed Bronze **WW** White	**-ES** Energy Star

- 120V - 60Hz
- 3 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- 1RP18-ES: Alabaster Glass Shade
- 1RP18-SG-ES: White Satin Glass Shade
- Replacement Glass: 1RP18G 1RP18SG
- Energy Star 4.0 Compliant
- cETLus Listed for damp location

1RP18-ES
Oil Rubbed Bronze (OB)



1RP18-SG-ES
Brushed Nickel (BN)

1RP18-ES
White (WW)

1RP18-ES
Black (BK)

ORDERING GUIDE Example: 1RP18BN-SG-ES

Model	Finish	Glass	Energy Star
1RP18	**BN** Brushed Nickel **BK** Black **OB** Oil Rubbed Bronze **WW** White	blank Alabaster Glass **-SG** Satin Glass	**-ES** Energy Star

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Energy Star Ceiling Fan Light Kit

3 YEAR WARRANTY Lamp Only | 1 YEAR WARRANTY Light Kit Only

- 120V - 60 Hz
- 2 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- Shade: Satin White Acrylic lens
- Replacement Lens: 1RP22G
- Energy Star 4.0 Compliant
- cETLus Listed for damp location

Brushed Nickel (BN)



White (WW)

ORDERING GUIDE Example: 1RP22BN-ES

Model	Finish	Energy Star
1RP22	**BN** Brushed Nickel **WW** White	**-ES** Energy Star

- 120V - 60 Hz
- 2 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- Shade: Satin White Glass
- Replacement Glass: 1RP82-G
- Energy Star 4.0 Compliant
- cETLus Listed for damp location



White (WW)

Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 1RP82BN-ES

Model	Finish	Energy Star
1RP82	**BN** Brushed Nickel **OB** Oil Rubbed Bronze **WW** White	**-ES** Energy Star

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Energy Star LED Light Kits

LED Dimmable ENERGY STAR Intertek 5 YEAR WARRANTY

Can be added to the following Ceiling Fans: 1015W, 1016W, 1032, 1051, 1052, 1053, 1054, 1062-1, 1063-1, 1064-1, *(Sold Separately)*

White (WW), Brushed Nickel (BN), Brushed Pewter (BP), Black (BK) or Oil Rubbed Bronze (OB)

- 120V - 60Hz
- Dimmable
- Durable Steel and Satin Glass
- Energy Star Listed
- cETLus Listed

1RP31_-LED

BN, WW

17W | 1000 lms | 3000K | 90 CRI
W 10” x H 4-1/4”

1RP84_-LED

BN, BK, OB, WW

17W | 890 lms | 3000K | 90 CRI
W 11” x H 5”

1RP83_-LED

BN, OB, WW

17W | 950 lms | 3000K | 90 CRI
W 8” x H 2”

1RP88LED-_

BN, OB, WW

17W | 1200 lms | 3000K | 90 CRI
W 7-3/8” x H 1”
Use with Wall or Remote control only

1RP89LED-_

BN, OB

12W | 840 lms | 3000K | 90 CRI
W 7-3/8” x H 1”
Use with Wall or Remote control only

1RP69LED-_

BP, MBK, OB, WW

12W | 700 lms | 3000K | 90 CRI
W 7-5/8” x H 1-3/4”

WET

Integrated LED Light Kit

Can be added to the following Ceiling Fans: 1015W, 1016W, 1032, 1051, 1052, 1053, 1054, 1062-1, 1063-1, 1064-1, *(Sold Separately)*

White (WW), Brushed Nickel (BN), Brushed Pewter (BP), Black (BK) or Oil Rubbed Bronze (OB)

1RP32_-LED

BN, BK, OB, WW

17W | 1040 lms | 3000K | 80 CRI
W 11” x H 3-7/8”

E26 LED Light Kits

Can be added to the following Ceiling Fans: 1015W, 1016W, 1032, 1051, 1052, 1053, 1054, 1062-1, 1063-1, 1064-1, *(Sold Separately)*

Brushed Pewter (BP), Matte Black (MBK), Oil Rubbed Bronze (OB), White (WW)

1RP28_-E26-L

BP, MBK, OB, WW

Opal Glass
120V | 3 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI
Lamps Included
W 9-3/4” x H 5-5/8”

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Light Fitters

Available in White (WW), Brushed Nickel (BN), Brushed Pewter (BP), Black (BK), Matte Black (MBK), or Oil Rubbed Bronze (OB) finishes

- 120V - 60 Hz
- E26 A19 LED | Dimmable | 3000K | 80 CRI | Lamps Included
- Match with appropriate Shade Glass (sold separately)
- cETLus Listed for damp location

LK10_-E26-L

BN, OB, WW

1 x 9.5W E26 A19 LED

LK12_-E26-L

BP, MBK, OB, WW

1 x 9.5W E26 A19 LED

Wet Listed

LK30_-E26-L

BN, OB, WW

3 x 9.5W E26 A19 LED

LK412_-E26-L

BN, OB, WW

4 x 9.5W E26 A19 LED

Side / Center Glass Shades

2004CG

2-1/4" Clear Glass
Use with LK30-E26-L, LK412-E26-L

2004FG

2-1/4" Frosted Glass
Use with LK30-E26-L, LK412-E26-L

2015CG

2-1/4" Clear Glass
Use with LK30-E26-L, LK412-E26-L

2015FG

2-1/4" Frosted Glass
Use with LK30-E26-L, LK412-E26-L

2021G

2-1/4" Opal Glass
Use with LK30-E26-L, LK412-E26-L

2061G

2-1/4" Alabaster Glass
Use with LK30-E26-L, LK412-E26-L

3001G

4" White Opal Schoolhouse
Use with LK10-E26-L, LK12-E26-L, LK412-E26-L

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Light Kit Covers

To be used to cover up integrated LED and E26 Light Kits when not needed.

Available in White (WW), Oil Rubbed Bronze (OB), or Brushed Nickel (BN)

LC-WW-102

White Steel
6-3/8” Diameter
For use with Fans: 1021-PC, 1022-PC, 1023-PC, and 1024-PC

LC-WW-79

White Steel
8-1/3” Diameter
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079

LC-OB-102

Oil Rubbed Bronze Steel
6-3/8” Diameter
For use with Fans: 1021, 1022, 1023,1024, and 1088LED

LC-OB-79

Oil Rubbed Bronze Steel
8-1/3” Diameter
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079

LC-BN-102

Brushed Nickel Steel
6-3/8” Diameter
For use with Fans: 1021-PC, 1022-PC, 1023-PC, and 1024-PC

LC-BN-79

Brushed Nickel Steel
8-1/3” Diameter
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079

LC-BK-79

Blackl Steel
8-1/3” Diameter
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079

Fan Motor Finishes

OB-Oil Rubbed Bronze

BN-Brushed Nickel

BK-Black

MBK-Matte Black

WW-White

BP-Brushed Pewter
OUTDOOR

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Wall Controls

Most RP Lighting Fans have a Pull Chain as the standard control for 3-speed or 4-speed control. There is also a forward/reverse switch to control the flow of air for cooling or warming. RP Lighting + Fans offers a full range of wall-mounted remote controls. (Sold Separately)

WC-3

- 2 Wire installation
- Rotary
- 4 speed fan control
- White knob included
- Face plate not included

WC-13

- White Finish
- Single slide
- 2 Wire installation
- 4 speed fan control
- Fan up to 1.25 Amps

WC-4

- White Finish
- Single slide
- 3 Wire installation
- 3 speed fan control
- Designed only for multiple fan use
- Fan up to 5 Amps

WC-16

- White Finish
- Single slide
- 3 Wire installation
- 3 speed fan control
- On / Off Light Control
- Fan up to 1.25 Amps

WC-8

- White Finish
- Dual slide
- 4 speed fan control
- 3 Wire installation
- Full range light dimming
- Compatible with LED, CFL and Incandescent

Remote Controls

Our basic remote controls are sold separately and are adaptable to most of our fans throughout the line. They operate from a wireless radio frequency and with the touch of a button you can control the fan's three, or four, speeds and full range of light dimming from off to full bright at distances of up to 50 feet. This remote control system has a ceiling mounted receiver, a hand held 9-volt battery powered transmitter, and a wall mounting bracket.

RC-10

- Fan / Light Remote Control
- Canopy mount
- 3 speed fan control
- Full range light dimming
- Compatible with LED, CFL
- Universal with all fans

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Downrods & Connectors

Downrod Connector

For extra high ceilings - this coupler allows two downrods to be connected together.

Available in brushed nickel (BN), black (BK), oil rubbed bronze (OB), white (WW)

DC-BN DC-BK DC-OB DC-WW

Downrods



1/2” Diameter decorative downrods are available in a variety of sizes and finishes. For best performance and appearance, use an extension downrod with your ceiling fan when installing on a sloped ceiling.

Finishes	Downrod Model # / Length									
	E12	E18	E24	E36	ER36*	E48	ER48*	E60	ER60*	E72
	X	X	X	X	X	X	X	X	X	X
White (WW)	X	X	X	X		X		X		X
Black (BK)	X	X	X	X	X	X		X		X
Brushed Nickel (BN)	X	X	X	X	X	X	X	X	X	X
Oil Rubbed Bronze (OB)							X		X	

It is recommended that there is at least 7’ of clearance under your ceiling fan blades - the standard 4” downrod should work in most 8’ ceiling installation.

1/2” down rod connector joins two downrods together for extended lengths. Do not exceed 144” (two 72” downrods connected together is the maximum length recommended)

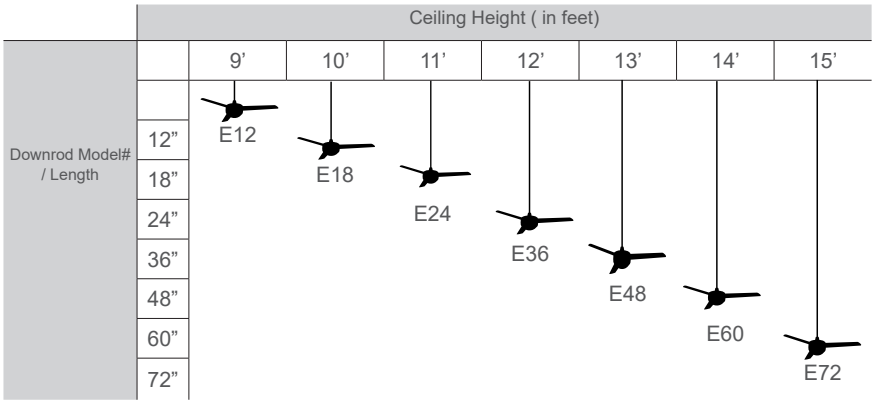

Tear Drops

T-09 WH T-09 NM T-09 BK T-09 WT T-09 BN

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Room Size Compatibility

Measurements are for general air flow requirements only. Decorating plans or aesthetic considerations should influence your fan choices beyond these room size specifications.

For large rooms, multiple fans are recommended.

Blade Sweep	80”	70”	56” - 60”	50” - 52”	30” - 42”
Approximate Room Size	20’ x 20’ Over 200 sq. ft.	15’ x 15’ Over 180 sq. ft.	12’ x 15’ 160-180 sq. ft.	10’ x 12’ 100-150 sq. ft.	6’ x 8’ 40-60 sq. ft.

Hanging Systems

Tri-mount system (flush mount, standard mount and vaulted ceilings up to 45°)



FLUSH



DOWNROD



VAULTED

Sloped Ceiling Adapter Kit

Slope adapters for ceiling pitch from 30° to 45°

Large ceiling mount bracket stabilizes the junction box in ceiling for a smoother and quieter performance.

SA45 WW

SA45 BN

SA45 OB

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Ceiling Fan Dimensions

Series	Model #	Dimensions (inches)			
		A	B	C	D
Europa	1004-E26-L	10-1/4”	--	10”	15-1/4"
Mirage	1005-E26-L	10-1/4”	--	10”	16"
Mirage	1005LED	10-1/4”	--	10”	16"
Europa I	1007-E26-L	10-1/2”	--	10”	16"
Europa I	1007LED	10-1/2”	--	10”	16"
Europa	1008LED	10-1/4”	--	10”	15-1/4”
Sunset	1015W	11”	12-5/8"”	11-1/2”	--
Sunset II	1016W	10”	11-1/2”	9”	--
Sabio	1021-PC	7-1/4"	--	10-7/8”	7-1/2”
Sabio	1022-PC	7-1/4"	--	10-7/8”	7-1/2”
Metalis	1023-PC	7-1/4"	--	10-7/8”	7-1/2”
Metalis	1024-PC	7-1/4"	--	10-7/8”	7-1/2”
Mirage I	1025-E26-L	10-1/2”	--	10”	16"
Mirage I	1025LED	10-1/2”	--	10”	16"
Desert Moon	1032	11-7/8”	12-5/8”	11”	--
Europa II	1041-E26-L	10-1/4”	--	10”	15-1/4”
Europa II	1041LED	10-1/4”	--	10”	15-1/4”
Mirage II	1042E26-L	10-1/4”	--	10”	15-1/4”
Mirage II	1042LED	10-1/4”	--	10”	15-1/4”
Contempo IV	1043LED	10-1/4”	--	10”	15-1/4”
Europa IV	1044LED	10-1/4”	--	10”	15-1/4”
Mirage IV	1045LED	10-1/4”	--	10”	15-1/4”
Aldea III	1046	9-3/4"	12-1/4"	7-5/8"	-
Aldea III	1046LED	9-3/4"	12-1/4"	--	13"
Aldea IV	1047	9-3/4"	12-1/4"	7-5/8"	-
Aldea IV	1047LED	9-3/4"	12-1/4"	--	13"
Aldea VI	1048	9-3/4"	12-1/4"	7-5/8"	-
Aldea VI	1048LED	9-3/4"	12-1/4"	--	13"
Contempo II	1049-E26-L	10-1/4”	--	10”	15-1/4”
Contempo II	1049LED	10-1/4”	--	10”	15-1/4”
Caribbean	1051	11-1/4”	12-3/5”	11-3/5”	--
Royal Star	1052	10-1/16”	11-5/8”	11"	--
Royal Knight	1053	9-3/4”	11-1/2”	9”	--
Royal Knight	1054	9-3/4”	11-1/2”	9”	--
Star Light	1057-L	9-3/4"	12-1/4"	11"	18"
Royal Knight Hugger	1062-1	6-1/8"	8-1/4”	11”	--
Royal Knight Hugger I	1063-1	5”	8-1/2”	9-1/5”	--
Royal Knight Hugger I	1064-1	5”	8-1/2”	9-1/5”	--
Aldea V	1065	9-3/4"	12-1/4"	7-5/8"	-
Aldea V	1065LED	9-3/4"	12-1/4"	--	13"
Aldea VII	1067	9-7/8"	12-3/8"	7-5/8"	-
Aldea VIII	1068	9-7/8"	12-3/8"	7-5/8"	-
Aldea IX	1069	9-7/8"	12-3/8"	7-5/8"	-
Arctic	1070W	11-1/4”	17-1/4”	8-3/4”	--
Aldea	1071	9-3/4”	12-1/4”	6-7/8”	--
Aldea	1071LED	9-3/4”	--	6-7/8”	13"
Colibri	1072-PC	9-31/32"	13"	9"	--
Colibri	1072LED-PC	9-31/32”	--	9”	13-1/2"
Torque	1073-PC	9-1/2"”	12"	6-1/2”	--
Torque	1073LED-PC	9-1/2"”	--	6-1/2”	13"
Aldea II	1074	9-3/4”	12-1/4”	6-7/8”	--
Aldea II	1074LED	9-3/4”	--	6-7/8”	13"
Contempo I	1078-E26-L	10-1/2”	--	10”	16"
Contempo I	1078LED	10-1/2”	--	10”	16"
Contempo	1079-E26-L	10-1/4”	--	10”	16"
Contempo	1079LED	10-1/4”	--	10”	16"
Arctic	1080W	11-1/4”	17-1/4”	8-3/4”	--
Rio Grande	1088	14”	16-3/8”	5-15/16”	--
Rio Grande	1088LED	14”	16-3/8”	5-15/16”	--
Industrial	1091	19”	21”	8”	--

Dimension A and B are measured with standard downrod included with the fan.

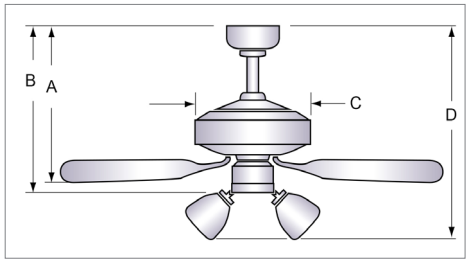

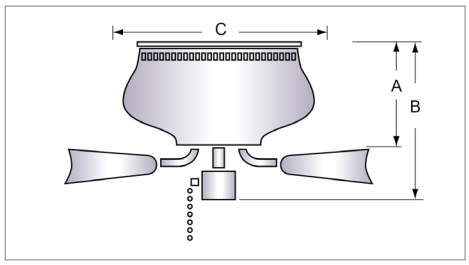

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Ceiling Fan Specifications

Model #	Blade Sweep	Motor Size (m/m)	Speed (RPM)		Airflow (CFM)	No. of Blades	Blades Pitch (Deg.)	Electricity Used Watts	Estimated Yearly Energy Cost	Airflow Efficiency	Amps	Capacitor
			High	Low								
1004-E26-L	50"	153 x 15	214	100	5351	4	12	61.96	11	86.4	0.52	3
1005-E26-L	50"	153 x 15	196	84	5149	5	12	59.6	11	86.4	0.5	3
1005LED	50"	153 x 15	196	84	5149	5	12	59.6	11	86.4	0.5	3
1007-E26-L	50"	153 x 15	228	109	5300	4	12	58.66	11	90.4	0.49	3
1007LED	50"	153 x 15	228	109	5300	4	12	58.66	11	90.4	0.55	3
1008LED	50"	153 x 15	214	100	5351	4	12	61.96	11	86.4	0.52	3
1015W	52"	153 x 12	166	79	4246	5	12	55.78	10	76.1	0.47	3
1016W	42"	153 x 9	220	90	3076	5	12	46.65	8	65.9	0.39	3
1021-PC	42"	153 x 9	232	97	3214	3	12	43.57	8	73.8	0.36	3
1022-PC	52"	153 x 14	189	84	4498	3	12	55.94	10	80.4	0.47	3
1023-PC	42"	153 x 9	210	84	3002	4	12	42.83	8	70.1	0.36	3
1024-PC	52"	153 x 14	177	81	4486	4	12	56.79	10	79.0	0.48	3
1025-E26-L	50"	153 x 15	204	89	5246	5	12	59.23	11	88.6	0.5	3
1025LED	50"	153 x 15	204	89	5246	5	12	59.23	11	88.6	0.5	3
1032	52"	172 x14	197	79	5017	5	11.5	49.84	9	100.7	0.47	3
1041-E26-L	44"	153 x 15	239	120	4255	4	12	49.48	10	86.0	0.42	3
1041LED	44"	153 x 15	239	120	4255	4	12	49.48	10	86.0	0.42	3
1042-E26-L	44"	153 x 12	217	111	4020	5	12	48.63	10	82.7	0.42	3
1042LED	44"	153 x 12	217	111	4020	5	12	48.63	10	82.7	0.42	3
1043LED	52"	172 x14	214	88	5540	3	12	49	9	113.1	0.46	3
1044LED	52"	172 x14	198	81	5454	4	12	49.21	9	110.8	0.46	3
1045LED	52"	172 x14	177	73	5224	5	12	50.16	9	104.1	0.47	3
1046	52"	172 x14	200	83	5538	3	11	50	9	110.8	0.45	3
1046LED	52"	172 x 14	198	81	5531	3	11	50.22	9	110.1	0.45	3
1047	52"	172 x14	184	74	5400	5	11	50.4	9	107.1	0.46	3
1047LED	52"	172 x 14	182	73	5420	5	11	50.5	9	107.3	0.46	3
1048	52"	172 x 14	171	70	5314	5	11	51	9	104.2	0.47	3
1048LED	52"	172 x 14	170	68	5333	5	11	51	9	104.6	0.47	3
1049-E26-L	44"	153 x 15	264	147	4361	3	12	47.71	10	91.4	0.41	3
1049LED	44"	153 x 15	264	147	4361	3	12	47.71	10	91.4	0.41	3
1051	52"	153 x 12	170	70	4180	5	12	65.74	11	63.6	0.53	3
1052	52"	153 x 12	162	75	3020	5	12	39	11	77.4	0.51	3
1053	42"	153 x 9	217	88	3195	5	12	47.41	8	67.4	0.4	3
1054	30"	153 x 9	280	115	2640	5	16	28	8	94.3	0.37	3
1057-L	52"	153 x 12	162	75	3020	5	12	39	11	77.4	0.51	3
1062-1	52"	153 x 15	156	74	2608	5	12	47.04	9	55.4	0.4	3
1063-1	42"	153 x 12	200	85	2684	5	12	43.83	8	61.2	0.37	3
1064-1	30"	153 x 12	307	139	2122	5	12	40.8	7	52.0	0.34	3
1065	52"	153 x 12	174	73	5156	5	11	58.64	10	87.9	0.49	3
1065LED	52"	153 x 12	174	73	5156	5	11	58.64	10	87.9	0.49	3
1067	52"	172 x 14	209	83	5600	5	11	50.9	9	110.0	0.46	3
1068	52"	172 x 14	190	73	5500	5	11	50.5	9	108.9	0.46	3
1069	52"	172 x 14	164	64	5197	5	11	50.28	9	103.4	0.46	3
1070W	70"	180 x 17	145	76	10012	7	15	39.92	7	250.8	0.58	0
1071	52"	153 x 12	195	73	4899	4	11	57	10	85.9	0.5	3
1071LED	52"	153 x 12	177	71	4945	4	11	57.63	10	85.8	0.48	3
1072-PC	60"	188 x 12	182	58	7827	3	11	65.46	11	119.6	0.54	3
1072LED-PC	60"	188 x 12	174	57	7681	3	11	61.18	11	125.5	0.538	3
1073-PC	52"	153 x 18	204	79	5666	3	11	60	10	94.4	0.5	3
1073LED-PC	52"	153 x 18	204	79	5666	3	11	60	10	94.4	0.5	3
1074	52"	153 x 12	196	78	5062	3	11	57.38	10	88.2	0.48	3
1074LED	52"	153 x 12	194	78	5062	3	11	57.45	10	88.1	0.48	3
1078-E26-L	50"	153 x 15	234	106	5449	3	12	57.26	11	95.2	0.48	3
1078LED	50"	153 x 15	234	106	5449	3	12	57.26	11	95.2	0.48	3
1079-E26-L	50"	153 x 15	229	100	5204	3	12	57.74	11	90.1	0.48	3
1079LED	50"	153 x 15	229	100	5204	3	12	57.74	11	90.1	0.48	3
1080W	80"	181 x 17	101	61	11274	7	18	46.94	9	240.2	0.66	0
1088	88"	155 x 20	102	49	10956	3	16	44.37	8	246.9	0.63	0
1088LED	88"	155 x 20	102	49	10066	3	16	44.37	8	226.9	0.63	0
1091	56"	194 x 16	310	100	7876	3	10	58.9	-	133.7	0.491	1

Except industrial fan model #1091, all ceiling fans measured airflow according to DOE test method, all estimates based on typical use, excluding lights.

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Energy Saving Features

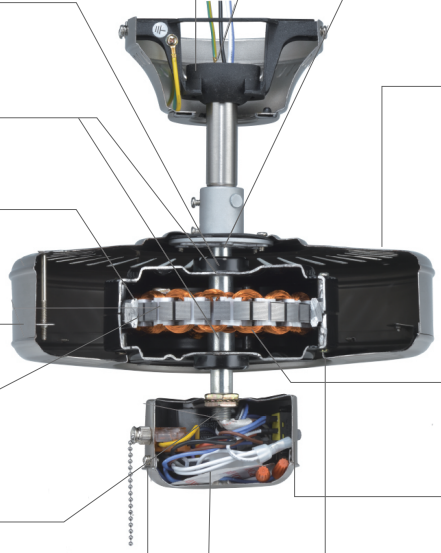

Oversized, Triple Mounting Systems and heavy duty die cast hanging ball which eliminates wobble problems and provides maximum angles up to 35° for sloped and vaulted ceiling.

Precision ground solid steel motor shaft fixed into stators, create no wobble and friction.

Self-lubrication, permanently double sealed ball bearings.

Pure aluminum die cast rotors provide the most energy efficiency possible.

Motor housing is stamped or die casted, triple plated and double casted with corrosion resistors. Housings are matched for a perfect fit.

Heavy duty copper wiring.

Detachable switch housing with pre-wired plug in connector makes installation quick and easy. Light kit adaptable.

Heavy duty, UL approved switches give constant speed and action through entire operation and warranty.

Triple capacitors for more silent operation.

52" or 76" lead wire on downrod ceiling fans, virtually eliminates splicing to accommodate longer downrod.

Maximum security, dual locking system, Threaded coupling to fit downrod tightly Safety cable installed.

No motor burn out from heat built up because our 16 pole motors have fiberglass insulation and silicon steel laminations.

Lifetime quality, vacuum dipped and lacquered stator provides constant magnetic operation.

3 speed with reversible switch can be used for summer/winter air flow.

DC Motors are utilized for maximum efficiency on our largest fans (1070, 1080).

Summer

In the warm months of summer, switch your fan to turn counter clockwise in order to make your room feel up to 7°C cooler.

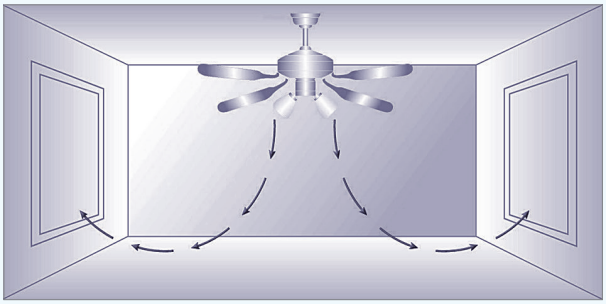

Winter

In the cooler months of autumn and winter, switch your fan to turn clockwise in order to recirculate the hot air that has been trapped near the ceiling.

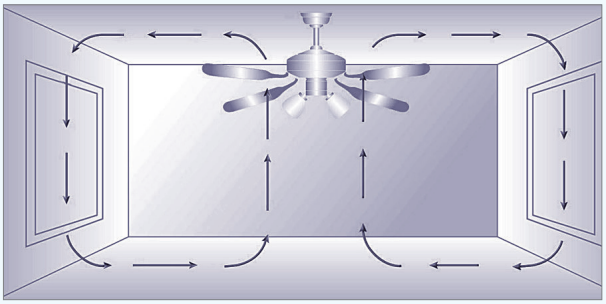

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Recessed Lighting

Recessed Lighting Housing Overview

Commercial Housing

8320H
2” Round Frame-In LED
Page 62

8321H
2” Square Frame-In LED
Page 62

8120H
4” LED Frame-In
Page 64

8120HIC
4″ LED IC Airtight Frame-In
Page 64

8121H
4” LED Architectural Housing
Page 64



8199HICA-FR
6” LED 2-Hour Fire Rated
Page 68

8122H
6” LED Frame-In
Page 70

8122HIC
6″ LED IC Airtight Frame-In
Page 70

8124H
6” LED Architectural Housing
Page 70

8162H
6” LED High Output Architectural Housing
Page 72

8163H
8” LED High Output Architectural Housing
Page 73

8125H
8” LED Frame-In
Page 74

8125HIC
8″ LED IC Airtight Frame-In
Page 74

8126H
8” LED Architectural Housing
Page 74

8041
4” Non-IC, LED Retrofit
Page 76

8061
6” Non-IC, LED Retrofit
Page 76

8081
8” Non-IC, LED Retrofit
Page 76

For all IC Rated housing consult factory if using cellulose, blown-in or foam insulation.

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Recessed Lighting Housing Overview

Residential Housing cont.

8317H
3” LED IC Frame-In
Page 78

8317HR
3” LED IC Remodel
Page 78

8215HA
4” LED IC Airtight Frame-In
Page 80

8215HRA
4” LED IC Airtight Remodel
Page 80

8117HA
6″ LED IC Airtight Shallow Frame-In
Page 82

8117HRA
6” LED IC Airtight Shallow Remodel
Page 82

8201HA
4” Airtight Frame-In
Page 84

8201HRA
4” Airtight Remodel
Page 84



8202HA
4” IC Airtight Frame-In
Page 84

8116HIC
6” LED IC Airtight Frame-In
Page 87

8102HAQ
6” IC Airtight Frame-In
Page 88

8102HRA
6” IC Airtight Remodel
Page 88

8104HICA
6” IC Airtight Shallow Frame-In
Page 88

8708
4” LED Retrofit Kit
Page 91

8711
4” LED Retrofit Trim,
2.25” Aperture
Page 91

8742-2
4” LED Ultra-Thin Light
Page 92

8542-2
6” LED Ultra-Thin Light
Page 92

8842
3” LED Ultra-Thin Light
Page 93

8642
8” LED Ultra-Thin Light
Page 93

8775
4” IC Rated, LED Retrofit & New
Construction J-Box Downlight
Page 94

8545
6” IC Rated, LED Retrofit &New
Construction J-Box Downlight
Page 95

8776
4” IC Rated, LED Recessed
Adjustable Gimbal J-Box Downlight
Page 96

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Recessed Lighting Housing Overview

Recessed Alternative

8739
5" Slim Round Disk
Page 97

8536
7" Slim Round Disk
Page 97

8539
7" Slim Round Disk
Page 97

8748
5" Square Ceiling Mount
Page 98

8548
7" Square Ceiling Mount
Page 98

8756
4" Low-Profile Disk
Page 99

8556
6" Low-Profile Disk
Page 99

8556-S
6" Low-Profile Closet Light
Page 100

8557
6" LED, CCT Selectable,
Low-Profile Disk
Page 100

8538
7" Flat Lens Disk
Page 101

8569
7" High Lumen Flat Lens Disk
Page 101

8554
9" LED Low-Profile Disk Light
Page 102

Warranty Information

Integrated LED Lights

Other Components

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

2” Frame-In LED

- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 2700K | 3000K | 80 CRI
- Beam Spread Options: 15°N | 38°M | 60°W
- Adjustable Trims: 0-30° tilt | 356° rotational
- cCSAus Listed for damp location
- 5 Year Limited Warranty
- Captive Bar Hangers Included

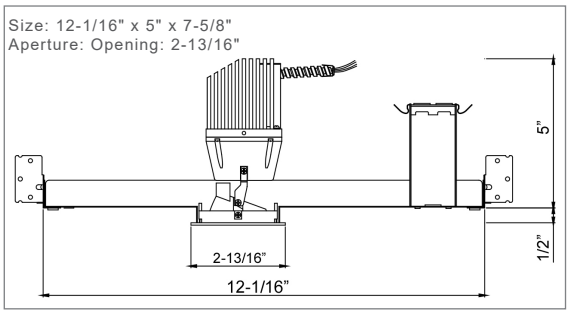

8320H
2" Round LED Frame-In

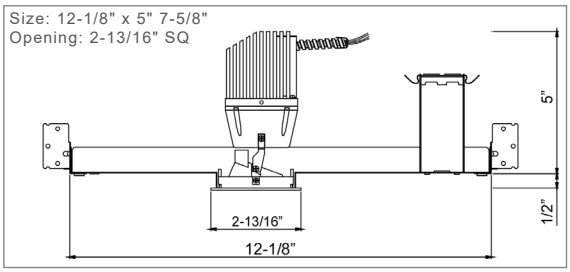

8321H
2" Square LED Frame-In

ORDERING GUIDE

Example: 8320H-10-30-38M-EM

Model #	Wattage	Color Temp	Beam Spread	Emergency
8320H	**-10** 10W, 870lms	**-27** 2700K	**-15N**	blank no EM Option
8321H	**-15** 15W, 1200lms	**-30** 3000K	**-38M**	**-EM** adds Battery Pack
	-23 23W, 1800lms		**-60W**	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Trims For 8320H

Wattage, lumen output, and CCT determined by housing choice.
Check housing Ordering Guide. Trim Aperture = 2-1/4”

8861AJ

0-30° Tilt White Cone
356° Rotational



ORDERING GUIDE

Example: 8861AJ-WH

Model #	Finish	
8861AJ	-WH	White

8861S

Straight White Cone



ORDERING GUIDE

Example: 8861S-WH

Model #	Finish	
8861S	-WH	White

Trims For 8321H

Wattage, lumen output, and CCT determined by housing choice.
Check housing Ordering Guide. Trim Aperture = 2-1/4”

8862AJ

0-30° Tilt White Cone
356° Rotational



ORDERING GUIDE

Example: 8862AJ-WH

Model #	Finish	
8862AJ	-WH	White

8862S

Straight White Cone



ORDERING GUIDE

Example: 8862S-WH

Model #	Finish	
8862S	-WH	White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4” LED Housings

- 120V-277V Universal Voltage
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | 80+ CRI
- 14W | 1150 lms 23W | 1950 lms
- 8120H & 8121H | 4-7/8” height for 2”x 6” construction
- 8120H & 8120HIC | Captive Bar Hangers Included
- Energy Star Listed – 3000K & 4000K only
- 8120H & 8121H – cCSAus Listed
- 8120HIC – cETLus Listed
- 5 Year Limited Warranty

8120H
4" LED Frame-In

Size: 12-1/6" x 7-5/8" x 4-7/8"
Opening: 4-13/16"

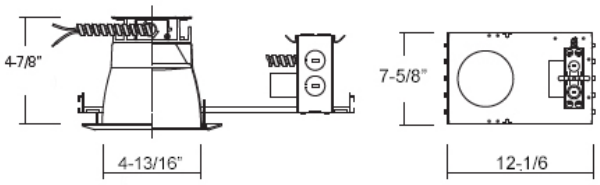

8120HIC
4" LED IC Airtight Frame-In

Size: 12-1/16" x 7-5/8" x 7-9/16"
Opening: 4-13/16"

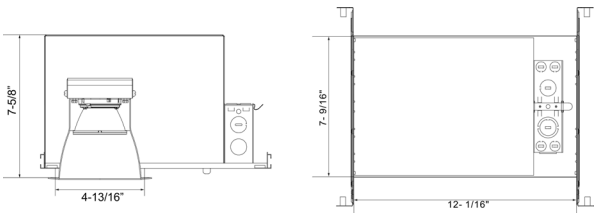

8121H
4" LED Architechural Housing

Size:12-1/16" x 7-15/16" x 4-7/8"
Opening: 4-13/16"

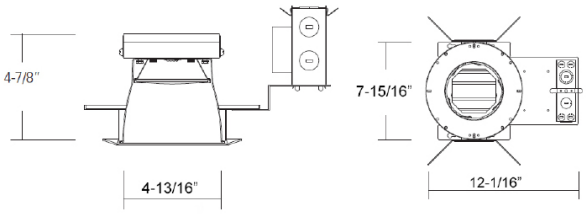

8096B

Optional Two Piece Bar Hanger set
24” Joist Span

ORDERING GUIDE

Example: 8120HIC-14-30-EM

Model #	Wattage		CCT		Emergency
8120H	-14	14W	-30	3000K	blank no EM option
8120HIC	-23	23W	-35	3500K	**EM** adds EM Battery Pack
8121H			-40	4000K	
			-50	5000K	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Trims For 8120H, 8120HIC and 8121H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

8590

Haze Cone Reflector



ORDERING GUIDE Example: 8590HZ

Model #	Finish	
8590	HZ	Haze

8586

Haze Reflector
with White Baffle



ORDERING GUIDE Example: 8586WH

Model #	Finish	
8586	WH	White

8587

WET

Haze Reflector
with White Baffle
with lens



ORDERING GUIDE Example: 8587WH

Model #	Finish	
8587	WH	White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

6” LED 2-Hour Fire Rated IC Airtight New Construction

- 120V-277V Universal Voltage
- Dimmable TRIAC, 10-100%
- 50,000 Hours Projected Life
- 3000K | 4000K | 90 CRI
- IC Rated for direct contact with installation
- 1-1/2” ceiling thickness adjustment
- Captive Bar Hangers Included
- Housing: cULus Listed; select trims wet location
- UL 1598 rated | 2-hr fire rating UL263
- ASTM-E283 Listed for Air-tight construction
- 5 Year Limited Warranty

Size: H 7-1/2” x L 9” x W 12-1/2”
Opening: 6-1/8”

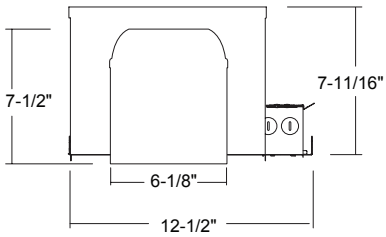

ORDERING GUIDE

Example: 8199HICA-FR-EM

Model #	Emergency	
8199HICA-FR	blank	no EM option added
	-EM	adds Battery Pack

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Trims For 8199HICA-FR

277V Trims Available By Special Order. Please contact RP Lighting + Fans for information.

8523

WET

Recessed White Baffle
120V | 12.5W |
850 lms
Wet Location



ORDERING GUIDE Example: 8523WH-90-3K

Model #	Finish	CRI	CCT
8523	**WH** White	**-90**	**-3K** 3000K **-4K** 4000K

8562

Recessed Gimbal
120V | 13W |
900 lms

ORDERING GUIDE Example: 8562WH-90-3K

Model #	Finish	CRI	CCT
8562	**BN** Brushed Nickel **BK** Black **OB** Oil Rubbed Bronze **WH** White	**-80**	**-3K** 3000K

8563

WET

Recessed Reflector
120V | 13W |
795 lms
Wet Location



ORDERING GUIDE Example: 8563CL-90-3K

Model #	Finish	CRI	CCT
8563	**BN** Brushed Nickel **BK** Black **CL** Clear **OB** Oil Rubbed Bronze **WH** White	**-90**	**-3K** 3000K

8568

WET

Recessed High Output Reflector
120V | 17W |
1240 lms
Wet Location



ORDERING GUIDE Example: 8568WH-90-3K

Model #	Finish	CRI	CCT
8568	**BK** Black **CL** Clear[1] **OB** Oil Rubbed Bronze **WH** White	**-90**	**-3K** **3000K** **-4K** **4000K**

1 - Only available in -90-3K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

6” LED Housings

- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | 80 CRI
- 14W | 1150 lms 23W | 1950 lms
- 30W | 2720 lms 45W | 3640 lms
- 8122H & 8122HIC | Captive Bar Hangers Included
- Energy Star Listed – 3000K & 4000K only
- cCSAus Listed for damp location; select trims wet location
- 5 Year Limited Warranty

8122H

6” LED Frame-In

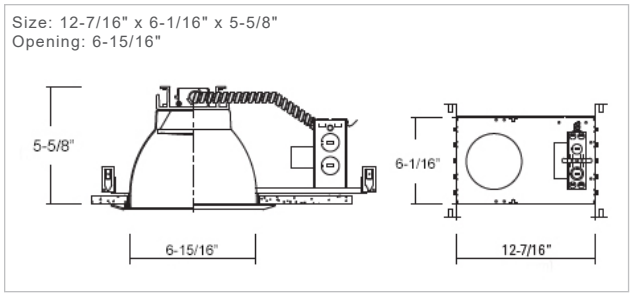

8122HIC

6″ LED IC Airtight Frame-In

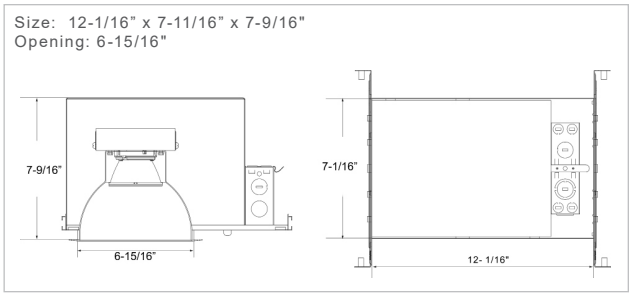

8124H

6″ LED Architectural Housing

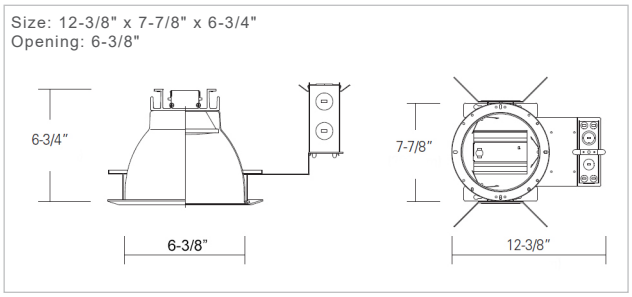

8096B

Optional Two Piece Bar Hanger set
24” Joist Span

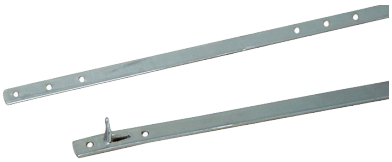

ORDERING GUIDE

Example: 8122H-14-40-EM

Model #	Wattage		CCT		Emergency
8122H	-14	14W	-30	3000K	blank no EM option
8122HIC	-23	23W	-35	3500K	**EM** adds Battery Pack
8124H	-30	30W	-40	4000K	
	-45	45W	-50	5000K	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Trims For 8122H, 8122HIC and 8124H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

8651

Haze Cone Reflector



ORDERING GUIDE Example: 8651HZ

Model #	Finish	
8651	HZ	Haze

8652

Haze Reflector with White Baffle



ORDERING GUIDE Example: 8652WH

Model #	Finish	
8652	WH	White

8653

WET



Haze Reflector with White Baffle with lens



ORDERING GUIDE Example: 8653WH

Model #	Finish	
8653	WH	White

8655

Haze Cone Reflector with Wall Wash



ORDERING GUIDE Example: 8655WH

Model #	Finish	
8655	WH	White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

6” LED High Output Housing

- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 4000K | 5000K | 80 CRI
- 50W | 3438 lms 60W | 4265 lms
- 70W | 4921 lms 90W | 5798 lms
- cULus Listed for damp location
- 5 Year Limited Warranty

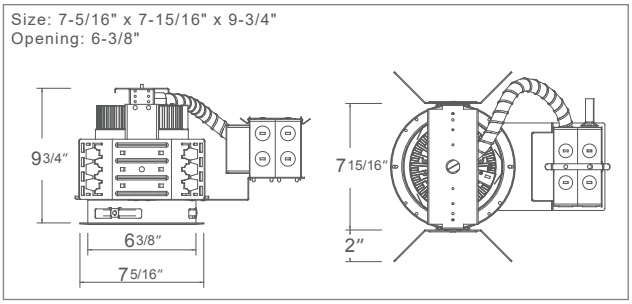

ORDERING GUIDE

Example: 8162H-50-30-EM

Housing	Wattage	Color Temp	Emergency
8162H	**-50** 50W **-60** 60W **-70** 70W **-90** 90W	**-30** 3000K **-40** 4000K **-50** 5000K	blank no EM option **EM** adds Battery Pack

Trims For 8162H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

8656

Haze Cone Reflector
O. D. 7-15/16”



ORDERING GUIDE

Example: 8656HZ

Model #	Finish
8656	**HZ** Haze

8096B

Optional Two Piece Bar Hanger set
24” Joist Span

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

8” LED High Output Housing

- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 4000K | 5000K | 80 CRI
- 50W | 3438 lms 60W | 4265 lms
- 70W | 4921 lms 90W | 5798 lms
- Energy Star Listed
- cULus Listed for damp location
- 5 Year Limited Warranty

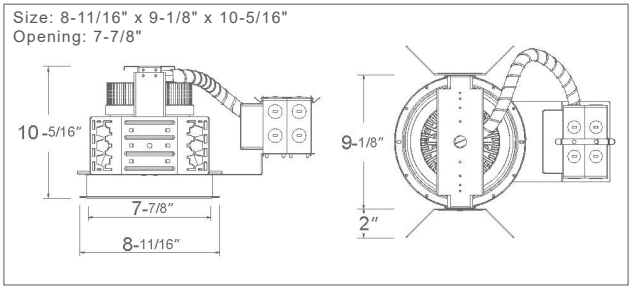

ORDERING GUIDE

Example: 8163H-50-30-EM

Housing	Wattage	Color Temp	Emergency
8163H	**-50** 50W **-60** 60W **-70** 70W **-90** 90W	**-30** 3000K **-40** 4000K **-50** 5000K	blank no EM option **EM** adds Battery Pack

Trims For 8163H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

8676

Haze Cone Reflector
O. D. 9-7/16"



ORDERING GUIDE

Example: 8656HZ

Model #	Finish
8656	**HZ** Haze

8096B

Optional Two Piece Bar Hanger set
24” Joist Span

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

8” LED Housings

- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | ?? CRI
- 23W | 1950 lms 30W | 2720 lms 45W | 3640 lms
- 8125H & 8125HIC | Captive Bar Hangers Included
- Energy Star Listed – 3000K & 4000K only
- cCSAus Listed for damp location; select trim wet location
- 5 Year Limited Warranty

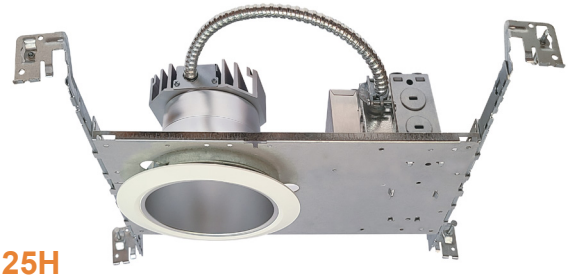

8125H
8” LED Frame-In

Size: 15-3/8" x 11-5/16" x 7-11/16"
Opening:7-5/8"

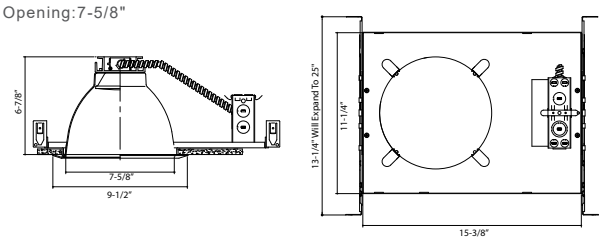

8125HIC
8″ LED IC Airtight Frame-In

Size: 15-3/8” x 11-5/16” x 7-11/16"
Opening: 7-15/16"

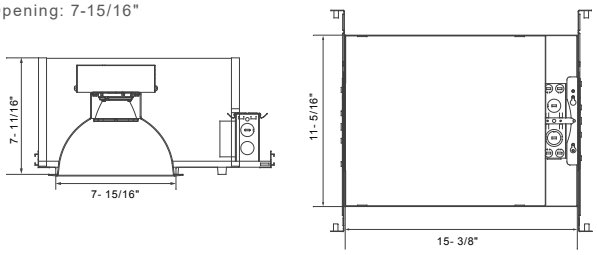

8126H
8” LED Architectural Housing

Size: 13-9/16” x 9” x 7-7/8”
Opening: 7-7/8"

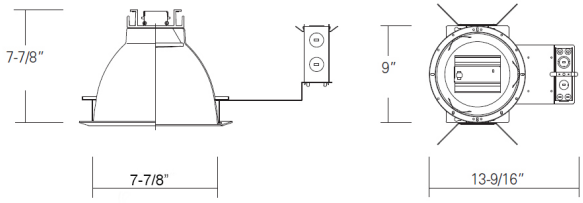

8096B
Optional Two Piece Bar Hanger set
24” Joist Span

ORDERING GUIDE

Example: 8125H-23-40-EM

Model #	Wattage		CCT		Emergency
8125H	-23	23W	-30	3000K	blank no EM option
8125HIC	-30	30W	-35	3500K	**EM** adds Battery Pack
8126H	-45	45W	-40	4000K	
			-50	5000K	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Trims For 8125H, 8125HIC and 8126H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

8671

Haze Cone Reflector
O. D. 9-7/16”



ORDERING GUIDE Example: 8671HZ

Model #	Finish	
8671	HZ	Haze

8673

WET

Haze Reflector
with lens
O. D. 9-7/16”



ORDERING GUIDE Example: 8673WH

Model #	Finish	
8673	WH	White

Non-IC, Architectural LED Retrofit

- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | 80 CRI
- 15W | 1015 lms 20W | 1245 lms
- 30W | 1915 lms 40W | 2565
- Beam Angle: 8041 | 65° 8061 & 8081 | 60°
- Energy Star Listed
- cCSAus Listed for damp location
- 5 Year Limited Warranty
- IC / Non-IC New Construction Mounting Plates Available

8041
4" Aperture Non-IC, LED Retrofit

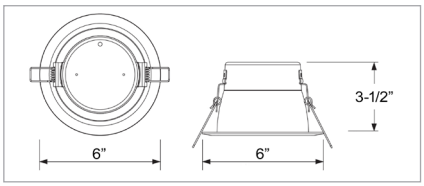

8061
6" Aperture Non-IC, LED Retrofit

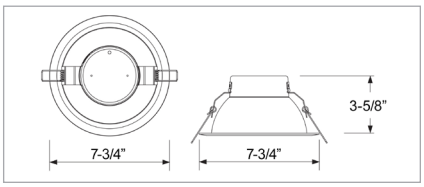

8081
8" Aperture Non-IC, LED Retrofit

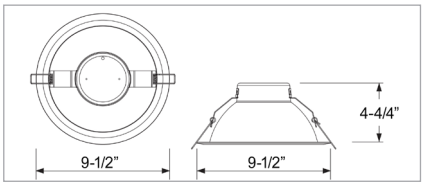

8164H

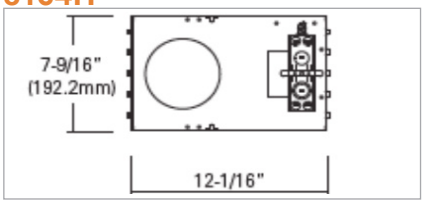

8166H

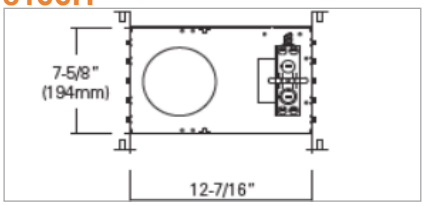

8168H

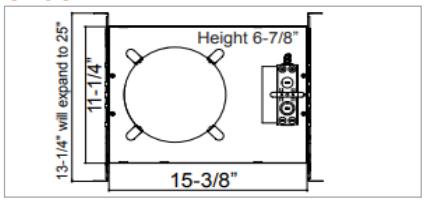

8164HIC

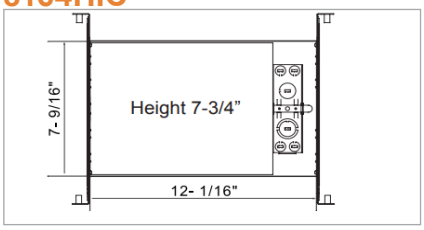

8166HIC

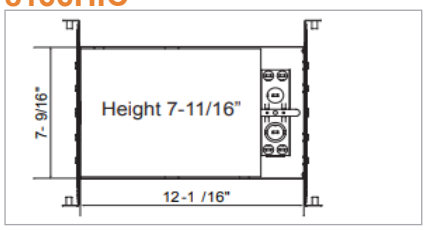

8168HIC

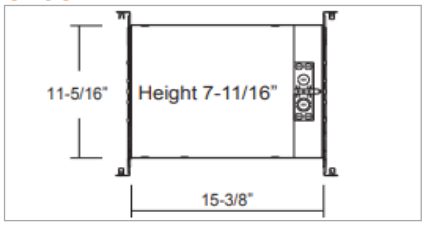

ORDERING GUIDE

Example: 8041-15-30-EM

Housing	Wattage	Source Lumens	Emergency
8041	**-15** 15W	**-30** 3000K	blank no EM option
8061	**-20** 20W	**-35** 3500K	**EM** adds Battery Pack
8081	**-30** 30W[1]	**-40** 4000K	
	-40 40W[2]		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4

3” LED IC Rated Housings

LED Lamps Housings

Housing
- 120V
- IC Rated for direct contact
- 1-1/4” ceiling thickness adjustable

Trims *(sold separately)*
- 3” Nominal Aperture
- 50,000 Hour Project Life
- 3000K | 80 or 90 CRI
- Dimmable TRIAC, 10-100%

- cCSAus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

8317H
3” LED IC Rated Frame-In

Size: H 4-7/8” x L 8-1/8” x W 3-1/16”
Opening: 3-1/16”

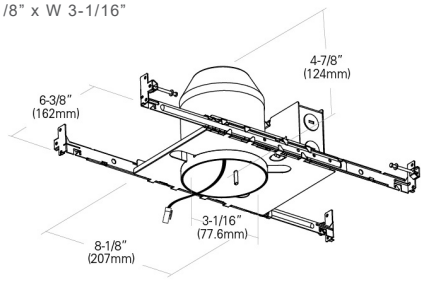

8317HR
3” LED IC Rated Remodel

Size: H 4-7/8" x L 11-1/4" x W 3-1/16"
Opening: 3-1/16"

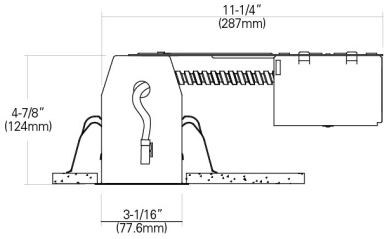

ORDERING GUIDE Example: 8317H

Model #
8317H
8317HR

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Trims For 8317H and 8317HR

8821-1

3" LED Recessed Baffle
10W | 650 lms
3000K | 80 CRI
120V
O.D. 3-3/4"

ORDERING GUIDE Example: 8821-1-WH-3K

Model #	Finish	CCT
8821-1-	**WH** White	**-3K** 3000K

8822-1

3" LED Recessed Gimbal
10W | 650 lms
3000K | 80 CRI
120V
O.D. 3-3/4"

ORDERING GUIDE Example: 8822-1-WH-3K

Model #	Finish	CCT
8822-1-	**WH** White	**-3K** 3000K

8823

3" Recessed Eyeball
8W | 600 lms
3000K | 90 CRI
120V
O.D. 3-5/8"

ORDERING GUIDE Example: 8823WH

Model #	Finish
8823	**WH** White

8824

3" LED Retrofit Baffle
10W | 600 lms
3000K | 90 CRI
120V
O.D. 3-5/8"

ORDERING GUIDE Example: 8824WH-90-3K

Model #	Finish	CRI	CCT
8824	**WH** White	**-90**	**-3K** 3000K

8825

3" LED Retrofit Gimbal
10W | 600 lms
3000K | 90 CRI
120V
O.D. 3-5/8"

ORDERING GUIDE Example: 8825WH-90-3K

Model #	Finish	CRI	CCT
8825	**WH** White	**-90**	**-3K** 3000K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4” LED IC Airtight Housings

C US LED Lamps Housings

Housing
- 120V
- IC Rated for direct contact
- 1” ceiling thickness adjustable

Trims *(sold separately)*
- 4” Nominal Aperture
- 50,000 Hours Projected Life
- 3000K or 4000K | 80 or 90 CRI
- Dimmable TRIAC, 10-100%

- cCSAus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

8215HA
4” LED IC Airtight Frame-In

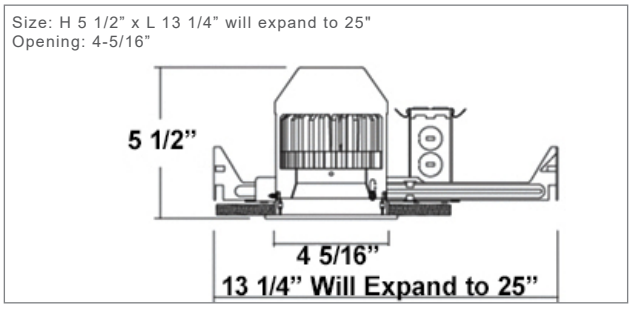

8215HRA
4” LED IC Airtight Remodel

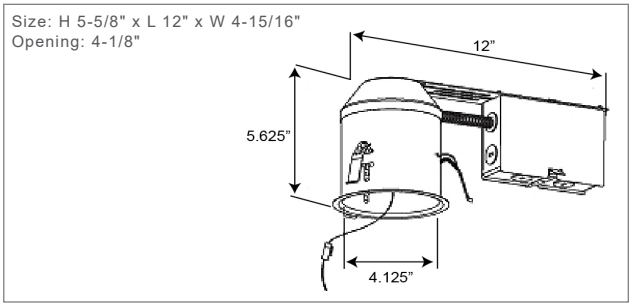

ORDERING GUIDE

Example: 8215HA

Model #	EM Option
8215HA 8215HRA	**-EM** adds EM Battery Backup (8215 housing only)

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Trims For 8215HA and 8215HRA

8763

4" LED Recessed Reflector
10W | 600 lms
3000K or 4000K | 90 CRI
120V
O.D. 5”

ORDERING GUIDE Example: 8763WH-90-3K

Model #	Finish		CRI	CCT	
8763	**BN**	Brushed Nickel	**-90**	**-3K**	3000K
	BK	Black		**-4K**	4000K
	OB	Oil Rubbed Bronze			
	CL	Clear			
	WH	White			

8769

4" LED Recessed Baffle
10W | 3000K
80CRI: 889 lms
90CRI: 710 lms
120V
O.D. 5"

ORDERING GUIDE Example: 8769WH-90-3K

Model #	Finish		CRI	CCT	
8769	**BA**	Brushed Aluminum	**-80**	**-3K**	3000K
	BK	Black[1]	**-90**		
	OB	Oil Rubbed Bronze[1]			
	WH	White			

1 - Only available in -80 CRI

8770

4" LED Recessed Clear Reflector
10W | 710 lms
3000K | 90 CRI
120V
O.D. 5”

ORDERING GUIDE Example: 8770CL-90-3K

Model #	Finish		CRI	CCT	
8770	**CL**	Clear	**-90**	**-3K**	3000K

8771

4" LED Recessed Gimbal
10W | 717 lms
3000K or 4000K | 90 CRI
120V
O.D. 5”

ORDERING GUIDE Example: 8771WH-90-3K

Model #	Finish		CRI	CCT	
8771	**WH**	White	**-90**	**-3K**	3000K
				-4K	4000K

8773

4" LED Recessed Square
11W | 700 lms
3000K or 4000K | 90 CRI
120V
O.D. 5-1/8”

ORDERING GUIDE Example: 8773WH-90-3K

Model #	Finish		CRI	CCT	
8773	**BN**	Brushed Nickel	**-90**	**-3K**	3000K
	OB	Oil Rubbed Bronze		**-4K**	4000K
	WH	White			

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

6” LED IC Airtight Housings

Intertek LED Lamps Housings

Housing
- 120V
- IC Rated for direct contact
- 1-1/4” ceiling thickness adjustable

Trims *(sold separately)*
- 6” Nominal Aperture
- 50,000 Hours Project Life
- 3000K or 4000K | 80 CRI or 90 CRI
- Dimmable TRIAC, 10-100%

- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

8117HA
6” LED IC Airtight Shallow Frame-In

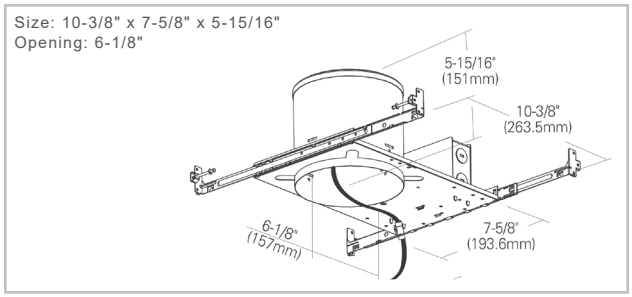

8117HRA
6” LED IC Airtight Shallow Remodel

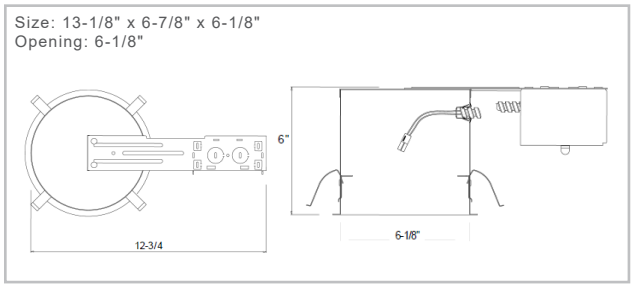

ORDERING GUIDE Example: 8117HA

Model #	EM Option	
8117HA 8117HRA	-EM	adds EM Battery Backup (8117HA housing only)

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Trims For 8117HA and 8117HRA

8523

WET

6" LED Recessed Baffle
12.5W | 850 lms
3000K or 4000K | 90 CRI
120V
O.D. 7-1/4"

ORDERING GUIDE Example: 8523WH-90-3K

Model #	Finish		CRI	CCT	
8523	**BN**	Brushed Nickel	**-90**	**-3K**	3000K
	BK	Black		**-4K**	4000K
	OB	Oil Rubbed Bronze			
	WH	White			

8562

6" LED Gimbal
13W | 900 lms
3000K | 80 CRI
120V
O.D. 7-3/4"

ORDERING GUIDE Example: 8562WH-80-3K

Model #	Finish		CRI	CCT	
8562	**BN**	Brushed Nickel	**-80**	**-3K**	3000K
	BK	Black			
	OB	Oil Rubbed Bronze			
	WH	White			

8563

WET

6" LED Reflector
13W | 795 lms
3000K or 4000K | 90 CRI
120V
O.D. 7-1/4"

ORDERING GUIDE Example: 8563WH-90-3K

Model #	Finish		CRI	CCT	
8563	**BN**	Brushed Nickel	**-90**	**-3K**	3000K
	BK	Black		**-4K**	4000K
	OB	Oil Rubbed Bronze			
	CL	Clear			
	WH	White			

8568

WET

6" LED Recessed Baffle
High Lumen Output
17W | 1240 lms
3000K or 4000K | 90 CRI
120V
O.D. 7-1/4"

ORDERING GUIDE Example: 8568WH-90-3K

Model #	Finish		CRI	CCT	
8568	**BK**	Black	**-90**	**-3K**	3000K
	OB	Oil Rubbed Bronze		**-4K**	4000K
	CL	Clear			
	WH	White			

* CL only available in -4K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4” Incandescent / LED Housings

Intertek LED Lamps Housings

Housing
- 120V - 60Hz
- Airtight; Non-IC/IC Available
- Frame-in: up to 1” ceiling thickness adjustable

Trims *(sold separately)*
- 4” Nominal Aperture
- Incandescent: 50W Max
- LED: Up to 900 lms
- LED: Dimmable TRIAC, 10-100%

- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

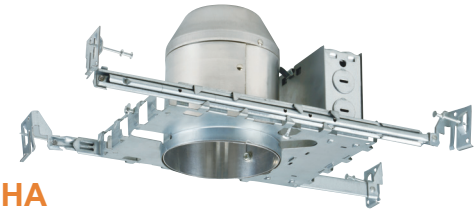

8201HA
4” Airtight Frame-In

Size:H 5-1/2" x L 7-3/4" x W 5-3/4"
Opening: 4-1/4"
Lamp:



8201HRA
4” Airtight Remodel

Size: H 5-5/8" x L11-5/8" x W 4-1/4"
Opening: 4-1/4"
Lamp:



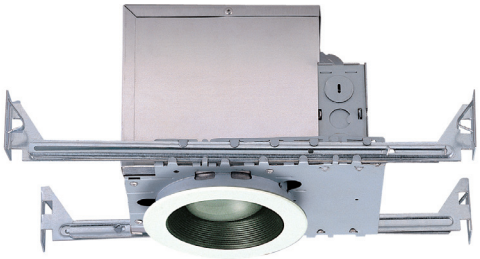

8202HA
4” IC Airtight Frame-In

Size: H 5-7/8” x L 8” x W 5-3/4”
Opening: 4-1/4”
Lamp:



ORDERING GUIDE Example: 8201HA

Model #
8201HA
8201HRA
8202HA

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

LED Trims For 8201HA, 8201HRA, and 8202HA

8756

WET

LED Low-Profile Disk
12W | 730 lms
3000K | 90 CRI
120V
O.D. 5-7/8”

ORDERING GUIDE Example: 8756WH-90-3K-R

Model #	Finish		CRI	CCT	Retrofit
8756	BN	Brushed Nickel	-90	-3K	-R
	BK	Black			
	OB	Oil Rubbed Bronze			
	WH	White			

8761

4" LED Retrofit Square
9W | 700 lms
3000K | 90 CRI
120V
O.D. 5”

ORDERING GUIDE Example: 8761BN-90-3K

Model #	Finish		CRI	CCT	
8761	BN	Brushed Nickel	-90	-3K	3000K
	OB	Oil Rubbed Bronze			

8763

WET

4" LED Recessed Reflector
10W | 600 lms
3000K or 4000K | 90 CRI
120V
O.D. 5”

ORDERING GUIDE Example: 8763BN-90-3K

Model #	Finish		CRI	CCT	
8763	BN	Brushed Nickel	-90	-3K	3000K
	BK	Black *		-4K	4000K
	OB	Oil Rubbed Bronze			
	CL	Clear			
	WH	White			

* Only available in -4K

8765

4" LED Recessed Gimbal
8W, 3000K
90CRI: 600lms
O.D. 5”

ORDERING GUIDE Example: 8765OB

Model #	Finish	
8765	BN	Brushed Nickel
	OB	Oil Rubbed Bronze
	WH	White

8768

4" LED Recessed Gimbal
10W | 900 lms
3000K | 90 CRI
120V
O.D. 5”

ORDERING GUIDE Example: 8768OB

Model #	Finish	
8768	BN	Brushed Nickel
	OB	Oil Rubbed Bronze
	WH	White

8722

WET

4" LED Recessed Baffle w/ Lens
10W | 650 lms
4000K | 90 CRI
120V
O.D. 5-1/8”

ORDERING GUIDE Example: 8722WH-90-4K

Model #	Finish		CRI	CCT	
8722	WH	White	-90	-4K	4000K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

LED Trims For 8201HA, 8201HRA, and 8202HA

8769

4" LED Recessed Baffle
10W, 3000K
80 CRI: 889 lms
90 CRI: 710 lms
120V
O.D. 5"

ORDERING GUIDE Example: 8769WH-90-3K

Model #	Finish		CRI	CCT	
8769	**BA**	Brushed Aluminum	**-80**	**-3K**	3000K
	BK	Black *	**-90**		
	OB	Oil Rubed Bronze *			
	WH	White			

* Only avaiable in 80 CRI

8770

4" LED Recessed Clear Reflector
10W | 710 lms
3000K | 90 CRI
120V
O.D. 5”

ORDERING GUIDE Example: 8770CL-90-3K

Model #	Finish		CRI	CCT	
8770	**CL**	Clear	**-90**	**-3K**	3000K

8771

4" LED Recessed Gimbal
10W | 717 lms
3000K or 4000K | 90 CRI
120V
O.D. 5”

ORDERING GUIDE Example: 8771WH-90-3K

Model #	Finish		CRI	CCT	
8771	**WH**	White	**-90**	**-3K**	3000K
				-4K	4000K

8773

4" LED Recessed Square
11W | 700 lms
3000K or 4000K | 90 CRI
120V
O.D. 5-1/8”

ORDERING GUIDE Example: 8773WH-90-3K

Model #	Finish		CRI	CCT	
8773	**BN**	Brushed Nickel	**-90**	**-3K**	3000K
	OB	Oil Rubbed Bronze		**-4k**	4000K
	WH	White			

Incandescent Trims For 8201HA, 8201HRA, and 8202HA

8701

White Baffle
50W Max.
PAR20/R20
120V
O.D. 5"

ORDERING GUIDE Example: 8701WH

Model #	Finish	
8701	**WH**	White

8702

WET

Fresnel Shower Trim
Wet location listed
35W Max.
PAR20/R20
120V
O.D. 5"

ORDERING GUIDE Example:8702FS

Model #	Finish	
8702	**FS**	Fresnel Lens

8705

WET

Albalite Shower Trim
Wet location listed
35W Max.
PAR20/R20
120V
O.D. 5"

ORDERING GUIDE Example:8705AL

Model #	Finish	
8705	**AL**	Alabite

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

6” LED High Lumen Housing

Intertek LED Lamps Housings

Housing
- 120-277V Universal - 60Hz
- IC Rated for direct contact
- Airtight Housing

Trims *(sold separately)*
- 6” Nominal Aperture
- 15W: 950 lms
- 20W: 1500 lms
- Dimmable TRIAC, 10-100%

- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

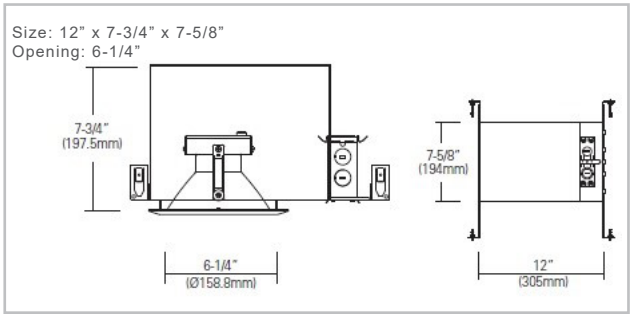

8116HIC
6” LED IC Airtight Frame-In

ORDERING GUIDE Example: 8116HIC-15-EM

Model #	Wattage	Emergency
8116HIC	**-15** : 15W | 950 lms **-20** : 20W | 1500 lms	blank no EM added **-EM** adds Emergency Battery

LED Trims For 8116HIC

8570

6" LED Shower or Baffle Trim
15W or 20W
3000K or 4000K | 90 CRI
120V
O.D. 8"

ORDERING GUIDE Example: 8570WH-15-3K

Model #	Finish	Wattage	CCT
8570	**FS** Frosted Shower * **WH** White Baffle	**-15** **-20**	**-3K** 3000K **-4K** 4000K

* FS Trim is Wet Location Listed

8571

6" LED Haze Open Reflector
15W or 20W
3000K or 4000K | 90 CRI
120V
O.D. 8"

ORDERING GUIDE Example: 8571HZ-15-3K

Model #	Finish	Wattage	CCT
8571	**HZ** Haze	**-15** **-20**	**-3K** 3000K **-4K** 4000K

8572

6" LED Eyeball
15W or 20W
3000K | 90 CRI
120V
O.D. 7-3/4"

ORDERING GUIDE Example: 8572WH-15-3K

Model #	Finish	Wattage	CCT
8572	**WH** White	**-15** **-20**	**-3K** 3000K

8573

6" LED Gimbal
15W or 20W
3000K | 90 CRI
120V
O.D. 7-3/4"

ORDERING GUIDE Example: 8573WH-15-3K

Model #	Finish	Wattage	CCT
8573	**WH** White	**-15** **-20**	**-3K** 3000K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

6” Incandescent / LED Housings

Intertek LED Lamps Housings

Housing
- 120V - 60Hz
- IC Airtight
- Frame-in: up to 1-1/4” ceiling thickness adjustable

Trims *(sold separately)*
- 6” Nominal Aperture
- Incandescent: 75W Max
- LED: Up to 1240 lms
- LED: Dimmable TRIAC, 10-100%

- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

8102HAQ
6” IC Airtight Frame-In

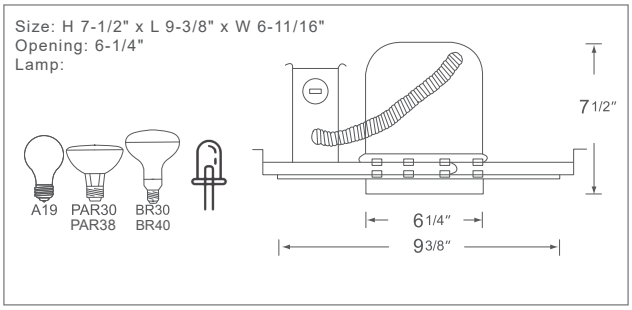

8102HRA
6” IC Airtight Remodel

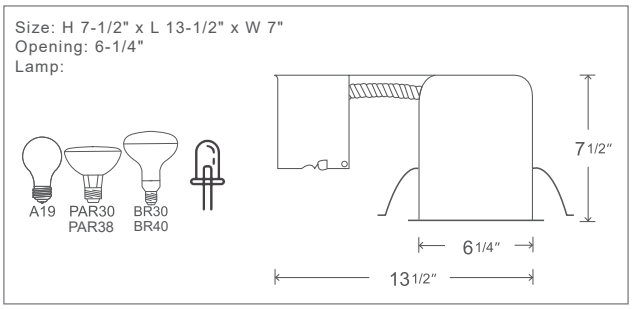

8104HICA
6” IC Airtight Shallow Frame-In

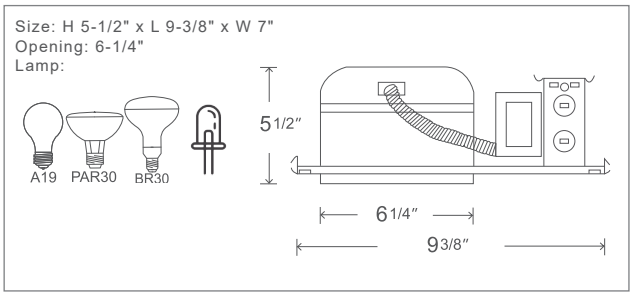

ORDERING GUIDE Example: 8102HAQ

Model #
8102HAQ
8102HRA
8104HICA

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

LED Trims For 8102HAQ, 8102HRA, 8104HICA

8523

WET

6” LED Recessed Baffle
12.5W | 850 lms
3000K or 4000K | 90 CRI
120V | O.D. 7-1/4"

ORDERING GUIDE Example: 8523WH-90-3K

Model #	Finish		CRI	CCT	
8523	**BN**	Brushed Nickel	**-90**	**-3K**	3000K
	BK	Black		**-4K**	4000K
	OB	Oil Rubbed Bronze			
	WH	White			

8562

6" LED Gimbal
13W | 900 lms
3000K | 80 CRI
120V | O.D. 7-3/4”

ORDERING GUIDE Example: 8562WH-80-3K

Model #	Finish		CRI	CCT	
8562	**BN**	Brushed Nickel	**-80**	**-3K**	3000K
	BK	Black			
	OB	Oil Rubbed Bronze			
	WH	White			

8563

WET

6" LED Reflector
13W | 795 lms
3000K or 4000K | 90 CRI
120V | O.D. 7-1/4”

ORDERING GUIDE Example: 8563WH-90-3K

Model #	Finish		CRI	CCT	
8563	**BN**	Brushed Nickel	**-90**	**-3K**	3000K
	BK	Black		**-4K**	4000K
	OB	Oil Rubbed Bronze			
	CL	Clear			
	WH	White			

8568

WET

6" LED Recessed Baffle
High Lumen Output
17W | 1240 lms
3000K or 4000K | 90 CRI
120V | O.D. 7-1/4”

ORDERING GUIDE Example: 8568WH-90-3K

Model #	Finish		CRI	CCT	
8568	**BK**	Black	**-90**	**-3K**	3000K
	OB	Oil Rubbed Bronze		**-4K**	4000K
	CL	Clear *			
	WH	White			

* CL only available in -4K

8564

WET

6" LED Retrofit Eyeball
12W | 900 lms
3000K | 90 CRI
120V | O.D. 7-1/4”

ORDERING GUIDE Example: 8564WH-90-3K

Model #	Finish		CRI	CCT	
8564	**BN**	Brushed Nickel	**-90**	**-3K**	3000K
	WH	White			

8567

WET

6" LED Eyeball
15W | 1200 lms
3000K | 90 CRI
120V | O.D. 7-1/4”

ORDERING GUIDE Example: 8567WH-90-3K

Model #	Finish		CRI	CCT	
8567	**BN**	Brushed Nickel	**-90**	**-3K**	3000K
	WH	White			

8538

WET

6” LED Flat Lens Disk
15W | 850 lms
3000K or 4000K | 90 CRI
120V | O. D. 7-3/8”

ORDERING GUIDE Example: 8538WH-90-3K-R

Model #	Finish		CRI	CCT	Retrofit
8538	**BN**	Brushed Nickel	**-90**	**-3K**	**-R**
	BK	Black		**-4K**	
	OB	Oil Rubbed Bronze			
	WH	White			

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

LED Trims For 8102HAQ, 8102HRA, 8104HICA

8556

WET

6" LED Low-Profile Disk
15W | 1000 lms
3000K or 4000K | 90 CRI
120V | O.D. 7-3/8"

ORDERING GUIDE Example: 8556WH-90-3K-R

Model #	Finish		CRI	CCT	Retrofit
8556	BN	Brushed Nickel *	-90	-3K	-R
	WH	White			

8569

WET

6" High Lumen Flat Lens Disk
15W | 1240 lms
120V | O.D. 7-3/8"

ORDERING GUIDE Example: 8769WH-80-3K-R

Model #	Finish		CRI	CCT	Retrofit
8769	WH	White	-80	-3K	-R

Incandescent Trims For 8102HAQ, 8104HICA

8502

WET

6" Lexan Shower Trim w/
Fresnel Lens
White Metal Trim
Wet location listed
60W Max. A19

ORDERING GUIDE Example: 8502FS

Model #	Finish	
8502	FS	Fresnel Lens

8504

6" Black Baffle
75W Max.
PAR30/BR30
O. D. 8"

ORDERING GUIDE Example: 8504BK

Model #	Finish	
8504	BK	Black

8505

WET

6" Lexan Shower Trim w/ Flat Opal
Albalite Lens
White Trim Ring
Wet location listed
60W Max. A19

ORDERING GUIDE Example: 8505AL

Model #	Finish	
8505	AL	Albalite Lens
	AL-BR	Albalite Lens w/ Bracket
	AL-M	Albalite Lens w/ Metal Ring

8511

6" White Baffle
75W Max.
PAR30/BR30
O. D. 8"

ORDERING GUIDE Example: 8511WH

Model #	Finish	
8511	WH	White

8519

6" Airtight White Baffle Cone
150W Max.
PAR30/BR30/A19
PAR38/BR40
O. D. 8"

ORDERING GUIDE Example: 8519WH

Model #	Finish	
8519	WH	White

8544

6" Open Trim
75W Max.
PAR30/BR30
O. D. 8"

ORDERING GUIDE Example: 8544WH

Model #	Finish	
8544	WH	White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4” LED Retrofit Kit

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 11W | 650 lms
- Aluminum Construction with Frosted Lens
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 compliant
- LED Lamps: 5 Year Limited Warranty

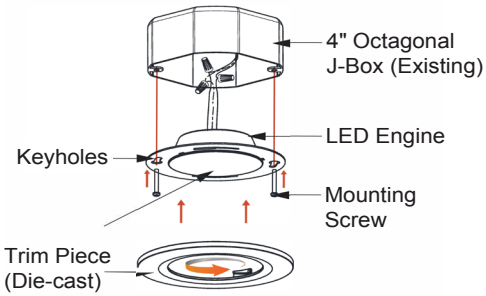



ORDERING GUIDE Example: 8708WH-3K

Model	Finish	CCT	
8708	**WH** White	**-3K**	3000
		-4K	4000

Accessory	Finish
4-JBR-BK	Black Trim Ring for 8708
4-JBR-BN	Brushed Nickel Trim Ring for 8708

4” LED Retrofit Trim, 2.25” Aperture

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 11W | 650 lms
- Aluminum Construction with Frosted Lens
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty



ORDERING GUIDE Example: 8711WH-90-3K

Model	Finish	CRI	CCT	
8711	**WH** White	**-90**	**-3K**	3000
			-4K	4000

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4” and 6” LED Ultra-Thin Light

- 120V - Ultra Slim Profile
- Durable Aluminum Construction
- Frosted Acrylic Lens
- 120° Beam Angle
- 4”-8742-2: 670 lms
- 6”-8542-2: 884 lms
- Dimmable TRIAC, 10-100%
- cETLus Listed for wet location
- Energy Star Listed
- LED lamps: 5 Year Limited Warranty

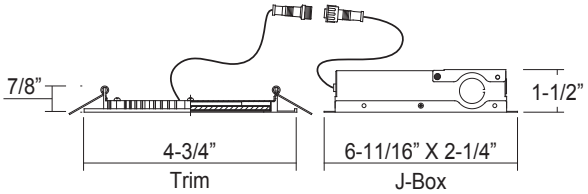

8742-2
4” Ultra-Thin Light

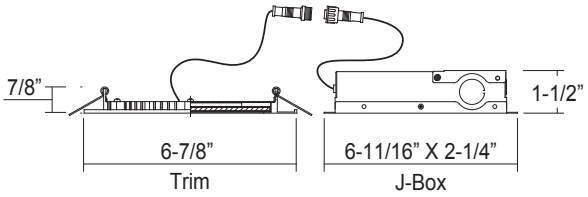

8542-2
6” Ultra-Thin Light

PF-4 and PF-6

4" or 6" Mounting Plate Accessory

- New Construction Mounting Plate
- Durable aluminum construction
- Includes four 24” bar hanger

ORDERING GUIDE

Example: 8742-2WH-3K

Model		Finish		CCT	
8742-2	4" Ultra-Thin Light	WH	White	-3K	3000K
8542-2	6" Ultra-Thin Light			-4K	4000K

Accessory	
PF-4	4" Mounting Plate
PF-6	6" Mounting Plate

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

6” and 8” LED Ultra-Thin Light

- 120V - Ultra Slim Profile
- Durable Aluminum Construction
- Frosted Acrylic Lens
- 120° Beam Angle
- 3”-8842: 350 lms
- 8”-8642: 1150 lms
- Dimmable TRIAC, 10-100%
- cETLus Listed for wet location
- Energy Star Listed
- 5 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

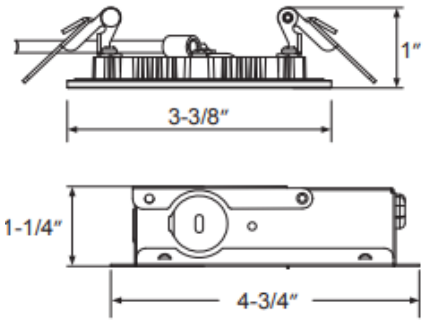

8842
3” Ultra-Thin Light

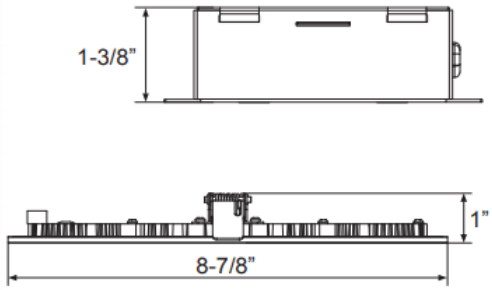

8642
8” Ultra-Thin Light

PF-3 and PF-4

3" or 4" Mounting Plate Accessory

- New Construction Mounting Plate
- Durable aluminum construction
- Includes four 24” bar hanger

ORDERING GUIDE Example: 8842WH-3K

Model		Finish		CCT	
8842	3" Ultra-Thin Light	WH	White	-3K	3000K
8642	8" Ultra-Thin Light			-4K	4000K
Accessory					
PF-3			3" Mounting Plate		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4” IC Rated, LED Retrofit & New Construction J-Box Downlight

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 12.7W | 760 lms
- Aluminum Construction with Frosted Lens
- IC Rated
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamps: 5 Year Limited Warranty

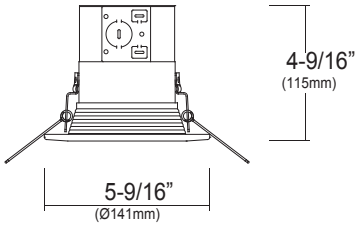

Ceiling Cut-out: 4-3/8”

ORDERING GUIDE Example: 8775WH-90-3K

Model	Finish	CRI	CCT
8775	**WH** White	**-90** 90 CRI	**-3K** 3000 **-4K** 4000

Accessory	
PF-4	4" Mounting Plate

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

6” IC Rated, LED Retrofit & New Construction J-Box Downlight

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 21W | 1314 lms
- Aluminum Construction with Frosted Lens
- IC Rated
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamps: 5 Year Limited Warranty

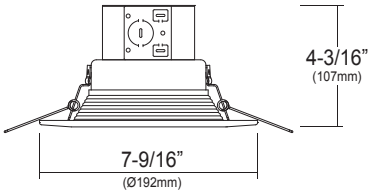

Ceiling Cut-out: 5-7/8”

ORDERING GUIDE Example: 8545WH-90-3K

Model	Finish	CRI	CCT
8545	**WH** White	**-90** 90 CRI	**-3K** 3000 **-4K** 4000

Accessory	
PF-6	6" Mounting Plate

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4” IC Rated, LED Recessed Adjustable Gimbal J-Box Downlight

- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 360° Rotational Axis Point
- 11.5W | 730 lms
- Aluminum Construction
- IC Rated
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamps: 5 Year Limited Warranty

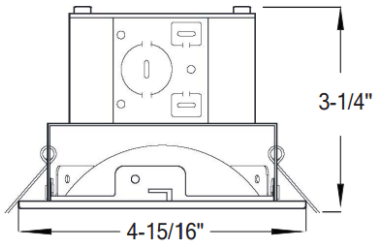

ORDERING GUIDE Example: 8776WH-90-3K

Model	Finish	CRI	CCT
8776	**WH** White	**-90** 90 CRI	**-3K** 3000K

Accessory	
PF-4	4" Mounting Plate

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

5” / 7” Slim Round Disk

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 8739: 5-5/8” x 1” | 12W | 722 lms
- 8536: 7” x 1” | 14W | 920 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty

Brushed Nickel (BN)



Oil Rubbed Bronze (OB)

White (WH)

Black (BK)

ORDERING GUIDE Example: 8536WH-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8739 8536	**BK** Black **BN** Brushed Nickel **OB** Oil Rubbed Bronze **WH** White	**-90**	**-3K** 3000 **-4K** 4000	blank no retrofit option **-R** adds retrofit

7” Slim Round Disk

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7” x 1” | 14W | 1050 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty

Brushed Nickel (BN)



Oil Rubbed Bronze (OB)

White (WH)

Black (BK)

ORDERING GUIDE Example: 8539BK-80-3K-R

Model	Finish	CRI	CCT	Retrofit
8539	**BK** Black **BN** Brushed Nickel **OB** Oil Rubbed Bronze **WH** White	**-80**	**-3K** 3000	blank no retrofit option **-R** adds retrofit

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

5” / 7” Square Ceiling Mount

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with plastic lens
- 8548: 7-1/4” x 1-1/4” | 15W | 907 lms
- 8748: 4-15/16" x 9/16" | 10W | 625 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty

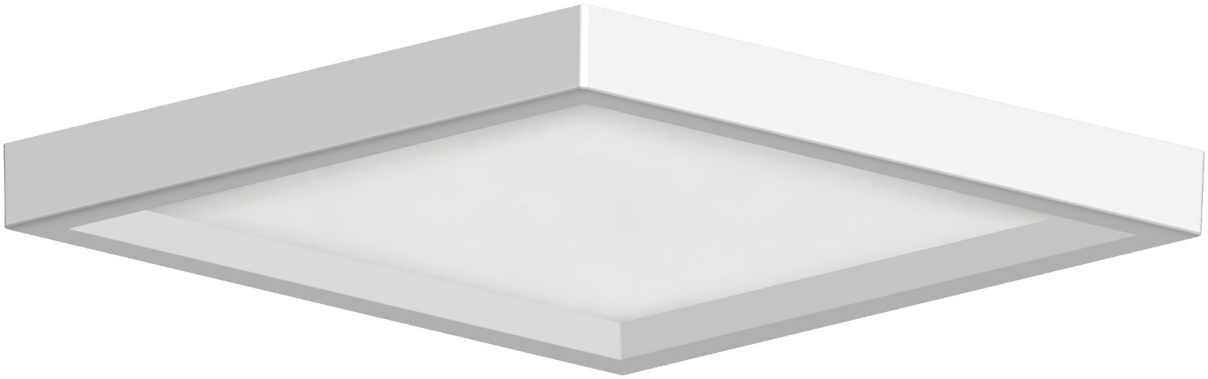

White (WH)

Black (BK)

Brushed Nickel (BN)

Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 8538BK-90-3K-R

Model	Finish		CRI	CCT	
8748	**BK**	Black *	**-90**	**-3K**	3000
8548	**BN**	Brushed Nickel		**-4K**	4000
	OB	Oil Rubbed Bronze			
	WH	White			

* - Only available for 8548

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4” Low-Profile Disk

- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum housing with polycarbonate lens
- 5-7/8” x 1-1/16” | 12W | 730 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty

Brushed Nickel (BN)

Black (BK)

White (WH)

Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 8756BN-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8756	**BN** Brushed Nickel **BK** Black **OB** Oil Rubbed Bronze **WH** White	**-90**	**-3K** 3000	blank no retrofit option **-R** adds retrofit

6” Low-Profile Disk

- 120V - 60Hz
- 27000K, 3000K, 4000K, 5000K
- 90 CRI
- Dimmable TRIAC, 0-100%
- Steel housing with polycarbonate lens
- 7-3/8” x 1-1/4” | 15W | 899 lms
- Energy Star Listed
- cCSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty

White (WH)

Black (BK)

Brushed Nickel (BN)

ORDERING GUIDE Example: 8556BN-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8556	**BN** Brushed Nickel * **BK** Black **WH** White	**-90**	**-27K** 27000 **-3K** 3000 **-4K** 4000 **-5K** 5000	blank no retrofit option **-R** adds retrofit

* Available in -3K or -4K only

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

6” Low-Profile Closet Light

- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8” x 1-3/8” | 15W | 900 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty

ORDERING GUIDE Example: 8556WH-S-90-3K

Model	Finish	Sensor	CRI	CCT
8556	**WH** White	**-S** Sensor	**-90** 90 CRI	**-3K** 3000K

6” LED, CCT Selectable, Low-Profile Disk

- 120V - 60Hz
- Color Selectable | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8” x 1-1/4”
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty

Adjusted Color of Light with Intrgrated Switch

SOFT WHITE (3000K)
BRIGHT WHITE (4000K)
DAYLIGHT (5000K)

ORDERING GUIDE Example: 8557WH-90-345

Model	Finish	CRI	CCT	Retrofit
8557	**WH** White	**-80** 80 CRI	**-345** CCT Selectable for 3000K, 4000K, 5000K	blank no retrofit option **-R** adds retrofit

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

7” Flat Lens Disk

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8” x 1” | 15W | 835 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty

White (WH)

Oil Rubbed Bronze (OB)

Brushed Nickel (BN)

Black (BK)

ORDERING GUIDE Example: 8538BK-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8538	**BK** Black **BN** Brushed Nickel **OB** Oil Rubbed Bronze **WH** White	**-90**	**-3K** 3000 **-4K** 4000	blank no retrofit option **-R** adds retrofit

7” High Lumen Flat Lens Disk

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8” x 1” | 15W | 1240 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty

White (WH)

ORDERING GUIDE Example: 8569WH-80-3K-R

Model	Finish	CRI	CCT	Retrofit
8569	**WH** White	**-80**	**-4K** 4000	blank no retrofit option **-R** adds retrofit

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

9” LED Low-Profile Disk Light

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 9-1/2” x 1-1/4” | 30W | 2085 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



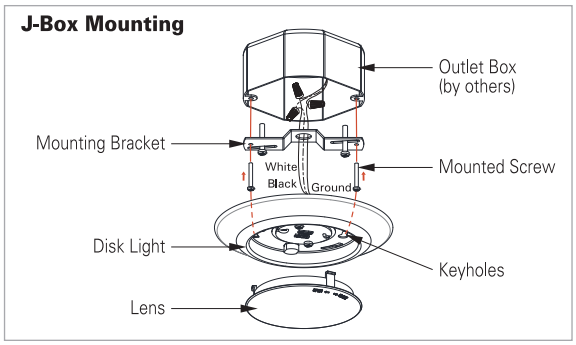

ORDERING GUIDE **Example: 8554WH-90-3K**

Model	Finish	CRI	CCT
8554	**WH** White	**-90** 90 CRI	**-3K** 3000 **-4K** 4000

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Recessed Lighting Accessories

8096A
Nail-Less Bar Hanger

8096B
Two Piece Bar Hanger set
24” Joist Span

8091A
Multi-Channel Bracket

Mounting Plate
PF-3 - 3" Mounting Plate
PF-4 - 4" Mounting Plate
PF-6 - 6" Mounting Plate

8097A
V-Spring

8098A
Coil Spring

FF109-300
One hour fire rated light cover, regular

FF109-350
One hour fire rated light cover, large

FF109X
Two hour fire rated light cover, regular

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Wall / Ceiling Mount

Wall Mount / Ceiling Mount Lighting Overview

4319
Edge-Lit LED Ribbon
Ceiling Mount
Page 107



4506
Edge-Lit LED Ribbon
Wall Mount
Page 107

4905
Edge-Lit LED Ribbon
Wall Mount
Page 107

8739, 8536,8539
5”, 7” Slim Round Disk
Ceiling Mount
Page 108

4350
11", 13", 15" LED
Ceiling Mount
Page 109

4325D-1-30
12” LED Ceiling Mount or
Wall Mount
Page 109

4326D-1-30
14” LED Ceiling Mount or
Wall Mount
Page 109

4327D-1-30
16” LED Ceiling Mount or
Wall Mount
Page 109

8748, 8548
4", 6" Low-Profile Square
Ceiling Mount
Page 110

4328-1, 4329-1, 4330-1
11", 13", 15" LED Square
Ceiling Mount
Page 111

4313-1, 4314-1, 4318-1
Flush Round
Ceiling Mount
Page 112

4345-30
Flush Round
Ceiling Mount
Page 112

4340
Flush Round LED
Ceiling Mount
Page 113

4715
11" Wet Location
Ceiling Mount
Page 114

4347
11", 13", 15" Dome
Ceiling Mount
Page 114

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Wall Mount / Ceiling Mount Lighting Overview

4348
11", 13" Ceiling Mount
Page 115

4333, 4334, 4335
11", 13", 15" Dome
Ceiling Mount
Page 115

8756, 8556
4", 6" Low-Profile Disk Light
Page 116

8556-S
6" LED Low-Profile Closet Light
Page 117

8557
6" LED Low-Profile Disc Light,
CCT Selectable
Page 117

8538, 8569
7" Flat Lens Disk
Page 118

8554
9" LED High Lumen Disk
Page 119

4336, 4337, 4338
12", 14", 16" Dome
Ceiling Mount
Page 120

4320, 4322
11", 14" Square Dome
Ceiling Mount
Page 120

4503-30
8" LED Wall Sconce
Page 121

4505-30
12" Half-Circle Wall Sconce
Page 121

4404-30
LED Indoor Wall Sconce
Page 122

Warranty Information

Integrated LED Lights

Other Components

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Edge-Lit LED Ribbon

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Metal construction with acrylic diffuser
- 4319: 15-3/4” x 4-1/8” | 25W | 1450 lms
- 4506: 10" x 4-1/8" x 3-1/4" | 9W | 500 lms
- 4905: 24" x 4-1/8" x 3-5/8" | 22W | 1500 lms
- cETLus Listed for damp location
- 5 Year Limited Warranty

4319

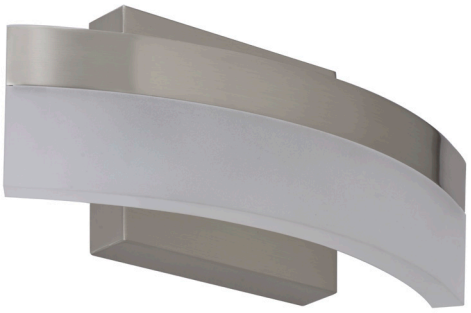

4506

4905

ORDERING GUIDE Example: 4319BN

Model	Finish	
4319	BN	Brushed Nickel
4506		

Example: 4905BN-24

Model	Finish		Length	
4905	BN	Brushed Nickel	-24	24"

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

5” / 7” Slim Round Disk

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 8739: 5-3/4” x 1” | 12W | 722 lms
- 8536: 7” x 1” | 14W | 920 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty

Brushed Nickel (BN)

Oil Rubbed Bronze (OB)

White (WH)

Black (BK)

ORDERING GUIDE Example: 8739WH-90-3K

Model	Finish	CRI	CCT	Retrofit
8739 8536	**BK** Black **BN** Brushed Nickel **OB** Oil Rubbed Bronze **WH** White	**-90**	**-3K** 3000 **-4K** 4000	blank no retrofit option **-R** adds retrofit

* 8536BK-4K not available

7” Slim Round Disk

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7” x 1” | 14W | 1050 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty

Brushed Nickel (BN)

Oil Rubbed Bronze (OB)

White (WH)

Black (BK)

ORDERING GUIDE Example: 8539BK-80-3K

Model	Finish	CRI	CCT	Retrofit
8539	**BK** Black **BN** Brushed Nickel **OB** Oil Rubbed Bronze **WH** White	**-80**	**-3K** 3000	blank no retrofit option **-R** adds retrofit

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

11” / 13” / 15” Flat Lens Thin Profile

- 120V - 60Hz
- 3000K or 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 11” W x 1” D | 15W | 1000 lms
- 13” W x 1” D | 20W | 1450 lms
- 15” W X 1” D | 30W | 1900 lms
- Energy Star Listed
- JA8/Title 24 Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty

Brushed Nickel (BN)

White (WH)

Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 4350WH-3K-15

Model	Finish		CCT		Size	
4350	**BN**	Brushed Nickel	**-3K**	3000K	**-11**	11"
	OB	Oil Rubbed Bronze	**-4K**	4000K	**-13**	13"
	WH	White			**-15**	15"

12” / 14” / 16” Round Ceiling Mount

- 120V - 60Hz
- 3000K | 80 CRI
- Steel construction with polycarbonate diffuser
- 4325D-1: 12-13/16” x 3-7/16” | 15W | 1138 lms
- 4326D-1: 13-13/16” x 3-13/16” | 23W | 1590 lms
- 4327D-1: 15-13/16” x 4” | 34W | 1900 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty

Brushed Nickel (BN)

White (WH)

Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 4325D-1-30-OB-EM

Model	Finish		EM Option	
4325D-1-30	**-BN**	Brushed Nickel	blank	no EM option
4326D-1-30	**-OB**	Oil Rubbed Bronze	**-EM**	adds EM option
4327D-1-30	**-WH**	White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

5” / 7” Square Ceiling Mount

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 8548: 7-5/16" x 9/16" | 15W | 907 lms
- 8748: 4-15/16" x 9/16" | 10W | 625 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty

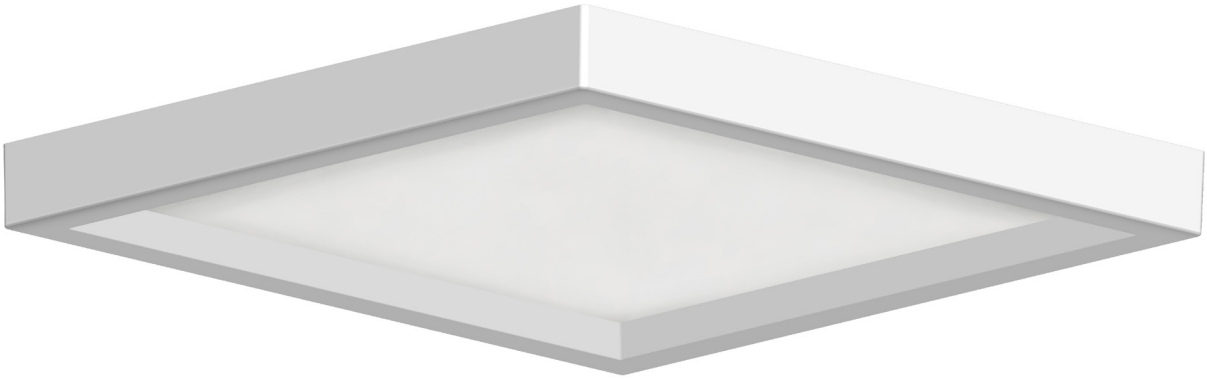

White (WH)

Black (BK)

Brushed Nickel (BN)

Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 8548WH-90-3K

Model	Finish		CRI	CCT	
8748	BK	Black *	-90	-3K	3000
8548	BN	Brushed Nickel		-4K	4000
	OB	Oil Rubbed Bronze			
	WH	White			

* - Only available for 8548

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

11” / 13” / 15” Square Ceiling Mount

- 120V - 60Hz
- 3000K or 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4328-1: 11” square | 15W | 1000 lms
- 4329-1: 13” square | 20W | 1200 lms
- 4330-1: 15” square | 30W | 1800 lms
- Low-profile 1-1/4” height
- Energy Star Listed
- JA8/Title 24 Compliant
- ETL Listed for damp location
- 5 Year Limited Warranty

Brushed Nickel (BN)

Oil Rubbed Bronze (OB)

White (WH)

WALL MOUNT / CEILING MOUNT

ORDERING GUIDE Example: 4328-1BN-3K

Model	Finish		CCT	
4328-1	BN	Brushed Nickel	-3K	3000K
4329-1	OB	Oil Rubbed Bronze	-4K	4000K
4330-1	WH	White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Flush Round Ceiling Mount

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4313-1: 11-13/16” x 3-7/16” | 15W | 1049 lms
- 4314-1: 14-5/8” x 4-13/16” | 23W | 1512 lms
- 4318-1: 17-11/16” x 4-3/16” | 34W | 1908 lms
- Energy Star Listed
- CSA Listed for damp location
- 5 Year Limited Warranty

Brushed Nickel (BN)

Oil Rubbed Bronze (OB)

White (WH)

ORDERING GUIDE Example: 4314-1-30-OB-EM

Model	Finish		EM Option	
4313-1-30	-BN	Brushed Nickel	Blank	no EM option
4314-1-30	-OB	Oil Rubbed Bronze	-EM	add EM option
4318-1-30	-WH	White		

Flush Round Ceiling Mount

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 32” x 18” x 4” | 35W | 2600 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty

Brushed Nickel (BN)

Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 4345-30-OB

Model	Finish	
4345-30	-BN	Brushed Nickel
	-OB	Oil Rubbed Bronze

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Flush Round Ceiling Mount

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRAIC, 10-100%
- Steel construction with acrylic diffuser
- 4340-30: 16-3/4"D x 4" H | 23W | 1600 lms
- cETLus Listed for damp location
- 5 Year Limited Warranty

Brushed Nickel (BN)

Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 4340BN

Model	Finish	
4340	BN	Brushed Nickel
	OB	Oil Rubbed Bronze

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

11” Wet Location Ceiling Mount

- 120V - 60Hz
- 3000K | 80 CRI
- Polycarbonate housing and lens
- 11” x 3-1/2” | 17W | 800 lms
- cETLus Listed for wet location
- 5 Year Limited Warranty

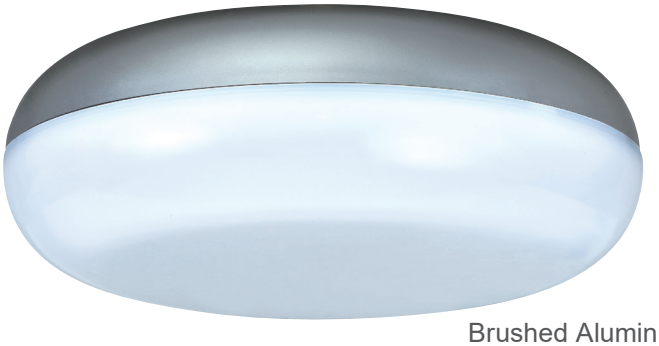

Brushed Aluminum (BA)



Oil Rubbed Bronze (OB)

Black (BK)

ORDERING GUIDE Example: 4715BA

Model	Finish	
4715	BA	Brushed Aluminum
	BK	Black
	OB	Oil Rubbed Bronze

11” / 13” / 15” Dome Ceiling Mount

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with Alabaster Glass
- 11": 11-1/4" x 4-1/2" | 15W | 1100 lms
- 13": 13” x 5-1/4” | 20W | 1500 lms
- 15”: 15” x 5-3/8” | 25W | 1800 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty

Brushed Nickel (BN)

White (WH)

Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 4347BN-11-3K

Model	Finish		Size		CCT	
4347	BN	Brushed Nickel	-11	11"	-3K	3000K
	OB	Oil Rubbed Bronze	-13	13"		
	WH	White	-15	15"		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

11” / 13” Ceiling Mount

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with frosted glass
- 11”: 11-1/2” x 3-3/8” | 15W | 950 lms
- 13”: 13-3/8” x 4” | 25W | 1400 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty

Brushed Nickel (BN)

ORDERING GUIDE Example: 4348OB-13-3K

Model	Finish		Size		CCT	
4348	**BN**	Brushed Nickel	**-11**	11"	**-3K**	3000K
	OB	Oil Rubbed Bronze	**-13**	13"		
	WH	White				

11” / 13” / 15” Dome Ceiling Mount

- 120V - 60Hz
- 3000K | 93+ CRI
- Dimmable TRIAC, 10-100%
- Steel construction with frosted glass
- 4333: 11-5/16” x 5-11/16” | 15W | 940 lms
- 4334: 13-3/8” x 5-1/2” | 23W | 1368 lms
- 4335: 15” x 5-9/16” | 34W | 2050 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty

Brushed Nickel (BN)

Oil Rubbed Bronze (OB)

White (WH)

Black (BK)

ORDERING GUIDE Example: 4333BN

Model	Finish	
4333	**BN**	Brushed Nickel
4334	**OB**	Oil Rubbed Bronze
4335	**WH**	White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4” Low-Profile Disk

- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum housing with polycarbonate lens
- 5-7/8” x 1-1/8” | 12W | 710 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty

White (WH)

Brushed Nickel (BN)

Black (BK)

Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 8756BN-90-3K-R

Model	Finish		CRI	CCT		Retrofit	
8756	**BN**	Brushed Nickel	**-90**	**-3K**	3000	blank	no retrofit option
	BK	Black				**-R**	adds retrofit
	OB	Oil Rubbed Bronze					
	WH	White					

6” Low-Profile Disk

- 120V - 60Hz
- 27000K, 3000K, 4000K, 5000K
- 90 CRI
- Dimmable TRIAC, 0-100%
- Steel housing with polycarbonate lens
- 7-3/8” x 1-1/4” | 15W | 899 lms
- Energy Star Listed
- cCSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty

White (WH)

Brushed Nickel (BN)

Black (BK)

ORDERING GUIDE Example: 8556BN-90-3K-R

Model	Finish		CRI	CCT		Retrofit	
8556	**BN**	Brushed Nickel *	**-90**	**-27K**	2700	blank	no retrofit option
	BK	Black *		**-3K**	3000	**-R**	adds retrofit
	WH	White		**-4K**	4000		
				-5K	5000		

* Available in -3K or -4K only

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

6” Low-Profile Closet Light

- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8” x 1-3/8” | 15W | 900 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty

White (WH)

ORDERING GUIDE Example: 8556WH-S-90-3K

Model	Finish	Sensor	CRI	CCT
8556	**WH** White	**-S** Sensor	**-90** 90 CRI	**-3K** 3000K

6” LED, CCT Selectable, Low-Profile Disk

- 120V - 60Hz
- Color Selectable | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8” x 1-3/8” | 15W | 900 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty

White (WH)

Adjusted Color of Light with Intrgrated Switch

SOFT WHITE (3000K)
BRIGHT WHITE (4000K)
DAYLIGHT (5000K)

ORDERING GUIDE Example: 8557WH-90-345

Model	Finish	CRI	CCT	Retrofit
8557	**WH** White	**-90** 90 CRI	**-345** CCT Selectable for 3000K, 4000K, 5000K	blank no retrofit option **-R** adds retrofit

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

7” Flat Lens Disk

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8” x 1” | 15W | 993 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty

White (WH)

Oil Rubbed Bronze (OB)

Brushed Nickel (BN)

Black (BK)

ORDERING GUIDE Example: 8538WH-90-3K

Model	Finish	CRI	CCT	Retrofit
8538	**BK** Black **BN** Brushed Nickel **OB** Oil Rubbed Bronze **WH** White	**-90**	**-3K** 3000 **-4K** 4000	blank no retrofit option **-R** adds retrofit

7” High Lumen Flat Lens Disk

- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8” x 1” | 15W | 1240 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty

White (WH)

ORDERING GUIDE Example: 8569WH-80-3K-R

Model	Finish	CRI	CCT	Retrofit
8569	**WH** White	**-80**	**-3K** 3000	blank no retrofit option **-R** adds retrofit

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

9” LED High Lumen Disk

- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 9-1/2” x 1-1/4” | 30W | 2085 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty

White (WH)



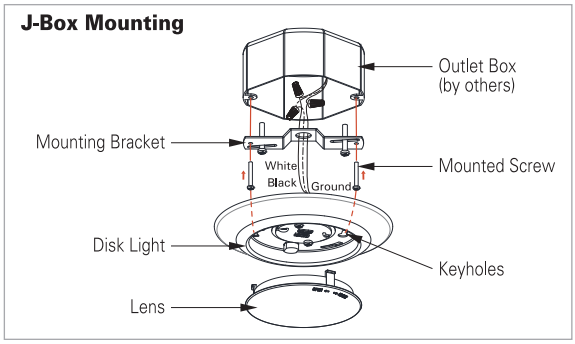

ORDERING GUIDE Example: 8554WH-90-3K

Model	Finish	CRI	CCT
8554	**WH** White	**-90** 90 CRI	**-3K** 3000K **-4K** 4000K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

12” / 14” / 16” Dome Ceiling Mount

- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4336: 11-11/16” x 3-7/8” | 15W | 953 lms
- 4337: 14-1/8” x 4” | 23W | 1319 lms
- 4338: 16-1/2” x 4-7/16” | 34W | 1817 lms
- Energy Star Listed
- CSAus Listed for damp location
- 5 Year Limited Warranty

White (WH)

ORDERING GUIDE Example: 4336WH

Model	Finish	
4336	WH	White
4337		
4338		

11” / 14” Square Dome Ceiling Mount

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4320: 10-11/16" x 2-7/8” | 15W | 1118 lms
- 4322: 14-1/2” x 3-1/8” | 23W | 1607 lms
- Energy Star Listed
- cCSAus Listed for damp location
- 5 Year Limited Warranty

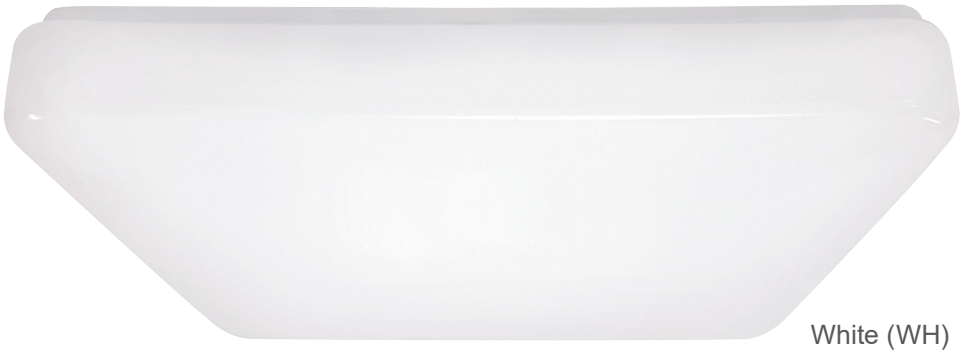

White (WH)

ORDERING GUIDE Example: 4320WH

Model	Finish	
4320	WH	White
4322		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

8” Wall Sconce

- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with glass diffuser
- 8” x 8” x 4” | 9W | 630 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty

Brushed Nickel (BN)

Oil Rubbed Bronze (OB)

White (WH)

ORDERING GUIDE Example: 4503-30-BN

Model	Finish	
4503-30	-BN	Brushed Nickel
	-OB	Oil Rubbed Bronze
	-WH	White

Half-Circle Wall Sconce

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 12” x 6" x 3-1/2" | 12W | 840 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty

Brushed Nickel (BN)

ORDERING GUIDE Example: 4505-30-BN

Model	Finish	
4505-30	-BN	Brushed Nickel

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Indoor Residential Wall Sconce

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 7" x 9-7/8" x 3-3/8" | 15W | 800 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty

Brushed Nickel (BN)

ORDERING GUIDE Example: 4404-30-BN

Model	Finish	
4404-30	**-BN**	Brushed Nickel

see 4406-30 for Wet Listed Outdoor use
pg 178

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Vanity Lighting

Vanity Light Overview

4909-2
2 Light Square Shade Vanity
Page 126

4909-3
3 Light Square Shade Vanity
Page 126

4909-4
4 Light Square Shade Vanity
Page 126

4908-1
1-Light Round Shade Vanity
Page 127

4904-2, 4908-2
2-Light Round Shade Vanity
Page 127

4904-3, 4908-3
3-Light Round Shade Vanity
Page 127

4904-4, 4908-4
4-Light Round Shade Vanity
Page 127



4906-18, 4906-24
18”, 24" Linear Vanity
Page 128



4906-36, 4906-48
36”, 48" Linear Vanity
Page 128

4907-18, 4907-24
18”, 24" Slim Profile Linear Vanity
Page 129

4907-36, 4907-48
36”, 48" Slim Profile Linear Vanity
Page 129

4906
Edge-Lit LED Ribbon
Page 130

4905
Edge-Lit LED Ribbon
Page 131

Warranty Information

Integrated LED Lights

Other Components

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Square Shade E26 LED Vanity Light

- 120V - 60 Hz
- Stainless Steel with Frosted Glass Square Shade
- 3000K | 80 CRI
- 9W E26 A19 LED Lamps Included
- Dimmable TRIAC, 10-100%
- Mounted either Up or Down position
- cETLus Listed for damp location
- CEC JA8 Compliant
- 1 Year Limited Warranty

4909-2

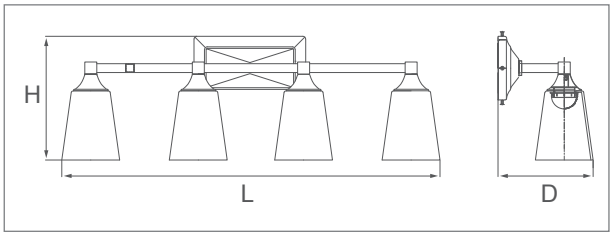

4909-3

4909-4

Model	Size (L x H x D)
4909-2	11-3/4" x 8-3/4" x 7"
4909-3	19-1/2" x 8-3/4" x 7"
4909-4	27-1/8" x 8-3/4" x 7"

ORDERING GUIDE Example: 4909BN-2

Model	Finish		# of Shades
4909	BN	Brushed Nickel	-2
			-3
			-4

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Round Shade Vanity Light

4908 | Intertek | LED Lamp | 4908

- 120V - 60 Hz
- Stainless Steel with Frosted Glass Round Shade
- 3000K | 80 CRI
- 4904 - Integral LED
- 4908 - 9W E26 A19 LED Lamp Included
- Dimmable TRIAC, 10-100%
- Mounted either Up or Down position
- cETLus Listed for damp location
- Energy Star Listed
- 4908: CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty
- 4908: 1 Year Limited Warranty

4908-1

4908-2
4904-2 *

4908-3
4904-3

4908-4
4904-4

Model	Size (L x H x D)
4908-1	6-1/4" x 5-1/4" x 10"
4904/8-2	13" x 5-1/4" x 10"
4904/8-3	22-1/8" x 5-1/4" x 10"
4904/8-4	31-1/8" x 5-1/4"" x 10"

Model	Wattage	Delivered Lumens
4904-2	15W	1050 lms
4904-3	25W	1755 lms
4904-4	30W	2110 lms

ORDERING GUIDE Example: 4904BN-2

Model	Finish		# of Shades
4904 Integral LED	BN	Brushed Nickel	-2 *
			-3
			-4

Model	Finish		# of Shades
4908 E26 A19 LED	BN	Brushed Nickel	-1
			-2
			-3
			-4

* Not Energy Star Listed

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear LED Vanity Light

Intertek

LED Lamp

Other Components

- 120V - 60 Hz
- Steel with Opal diffused acrylic lens
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Horizontal or Vertically Mounted
- Beam Angle 120°
- cETLus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



4906-18

4906-24

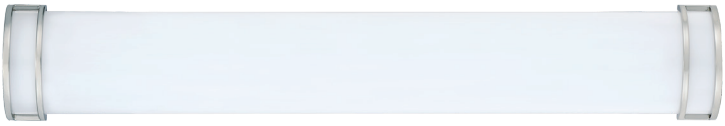

4906-36



4906-48

Model	Size (L x H x D)
4906-18	18" x 5-3/4" x 4-3/4"
4906-24	24" x 5-3/4" x 4-3/4"
4906-36	36" x 5-3/4" x 4-3/4"
4906-48	48" x5-3/4" x 4-3/4"

Model	Wattage	Lumens (delivered)
4906-18	20W	1400 lms
4906-24	24W	1600 lms
4906-36	28W	2100 lms
4906-48	35W	2800 lms

ORDERING GUIDE Example: 4906BN-24

Model	Finish		Length
4906	BN	Brushed Nickel	-18
			-24
			-36
			-48

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Slim Profile Linear Vanity Light

LED Lamp | Other Components

- 120V - 60 Hz
- Steel with linear diffused acrylic lens
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Horizontal or Vertically Mounted
- Beam Angle 120°
- cETLus Listed for damp location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

4907-18

4907-24

4907-36

4907-48

Model	Size (L x H x D)
4907-18	18" x 4-1/2" x 2-5/8"
4907-24	24" x 4-1/2" x 2-5/8"
4907-36	36" x 4-1/2" x 2-5/8"
4907-48	48" x 4-1/2" x 2-5/8"

Model	Wattage	Lumens
4907-18	12W	1080lms Source, 700lms Delivered
4907-24	15W	1350lms Source, 900lms Delivered
4907-36	25W	2250lms Source, 1600lms Delivered
4907-48	30W	2700lms Source, 2000lms Delivered

ORDERING GUIDE Example: 4907BN-24

Model	Finish		Length
4907	BN	Brushed Nickel	-18
			-24
			-36
			-48

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Curved LED Ribbon Vanity Light

Intertek | LED Lamp | Other Components

- 120V - 60 Hz
- Steel with acrylic ribbon diffuser
- 3000K | 80 CRI
- 9W | 500 lms
- Dimmable TRIAC, 10-100%
- 10" L x 4-1/2" H x 3" W
- ETL Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

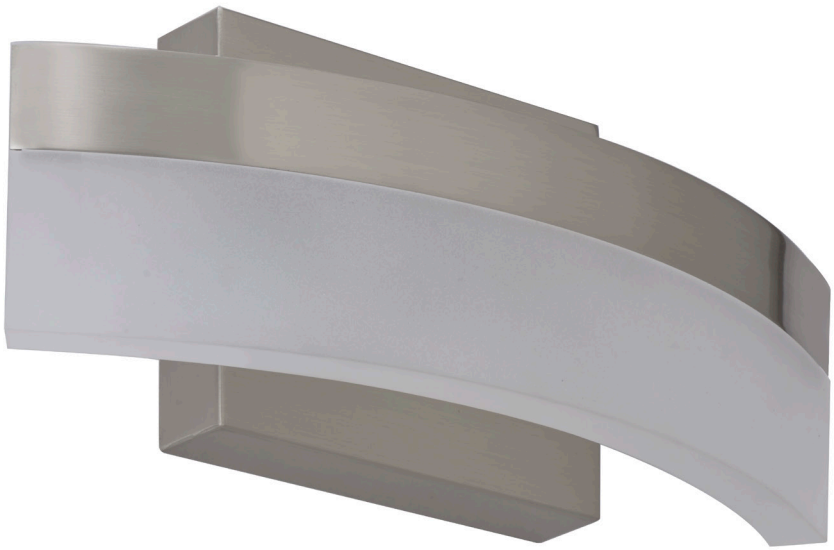

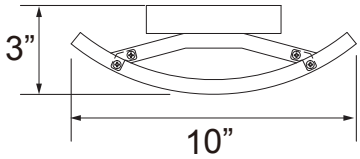



ORDERING GUIDE Example: 4506BN

Model	Finish	
4506	**BN**	Brushed Nickel

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear LED Ribbon Vanity Light

Intertek | LED Lamp | Other Components

- 120V - 60 Hz
- Steel with acrylic ribbon diffuser
- 3000K | 80 CRI
- 22W | 1500 lms
- Dimmable TRIAC, 10-100%
- 24" L x 4-1/2" H x 3" W
- ETL Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

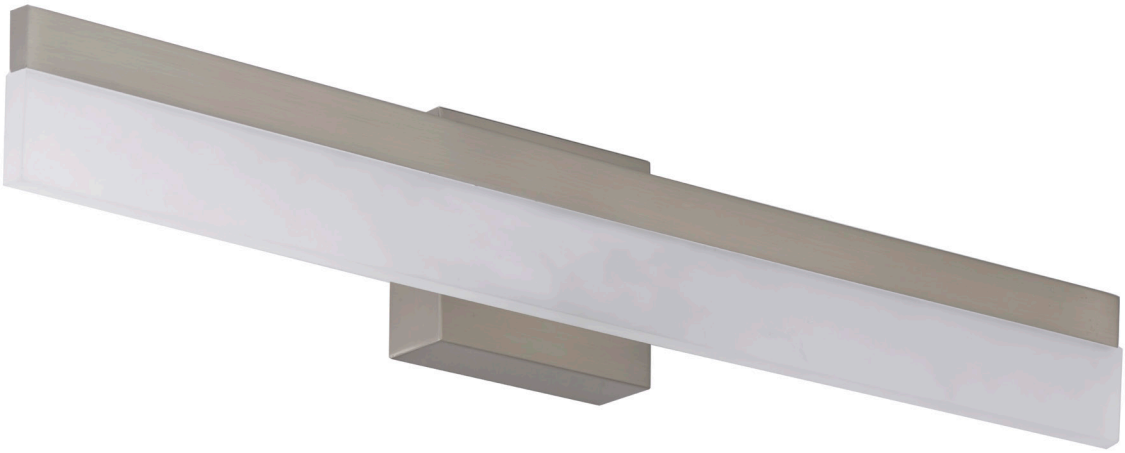



ORDERING GUIDE Example: 4905BN-24

Model	Finish		Length
4905	**BN**	Brushed Nickel	**-24**

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Decorative Suspended

Decorative Suspended Overview

4603-3
Round Shade Chandelier
Page 134

4603-5
Round Shade Chandelier
Page 134

4601
Chandelier Edge-Lit LED
Round Ribbon Light
Page 135

4602
Chandelier Edge-Lit LED
Round Ribbon Light
Page 135

4604-4
Linear Island LED Light
Page 136

4600
Linear Edge-lit LED Ribbon Light
Page 137

4606
Opal Glass LED Pendant Light
Page 138

4430
Round Shade LED
Pendant Light
Page 139

4605
E26 LED Pendant Light
Page 139

Warranty Information

Integrated LED Lights

Other Components

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Round Shade Chandelier

- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 80 CRI
- Ceiling Canopy fits standard electrical box
- 9W E26 A19 LED Lamps Included
- Dimmable TRIAC, 10-100%
- Includes 36" of Brushed Nickel chain with power cord
- cETLus Listed for damp location
- Energy Star Listed
- 1 Year Limited Warranty

4603BN-3

4603BN-5

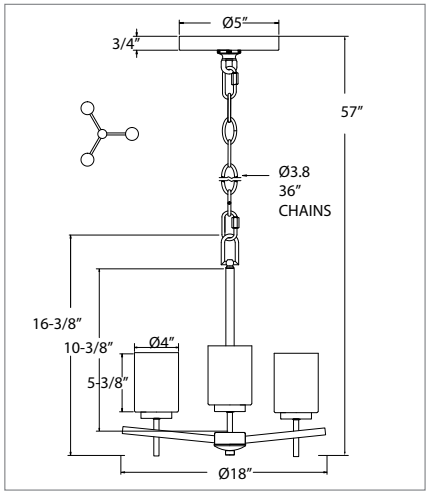

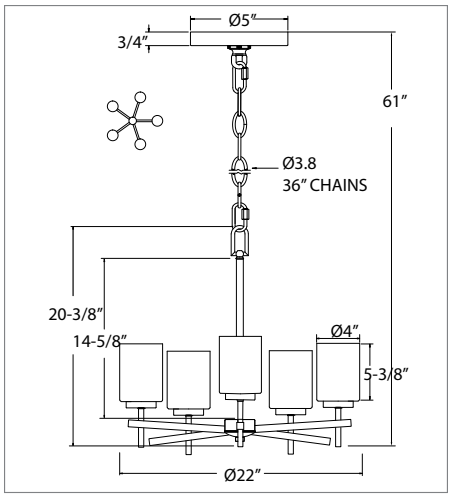

ORDERING GUIDE Example: 4603BN-3

Model	Finish		# of lights
4603	BN	Brushed Nickel	-3 -5

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Chandelier Edge-Lit LED Round Ribbon Light

LED Lamp | Other Components

- 120V 60 Hz - Power Over Cable
- Metal with diffused acrylic ribbon lens
- 3000K | 80 CRI
- 4601 - 25W | 1750 lms delivered
- 4602 - 60W | 4200 lms delivered
- Dimmable TRIAC, 10-100%
- Adjustable 6' wire length
- cETLus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

4601

4602

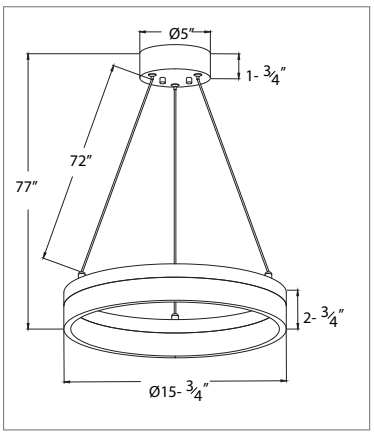

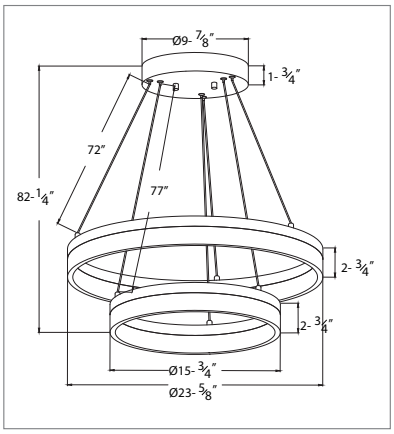

ORDERING GUIDE Example: 4601BN

Model	Finish	
4601	BN	Brushed Nickel

ORDERING GUIDE Example: 4602BN

Model	Finish	
4602	BN	Brushed Nickel

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear Island LED Light

- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 80 CRI
- Ceiling Canopy fits standard electrical box
- 9W E26 A19 LED Lamps Included
- Dimmable TRIAC, 10-100%
- Includes (2) 6” rods and (2) 12” rods per stem
- cETLus Listed for damp location
- Energy Star Listed
- 1 Year Limited Warranty

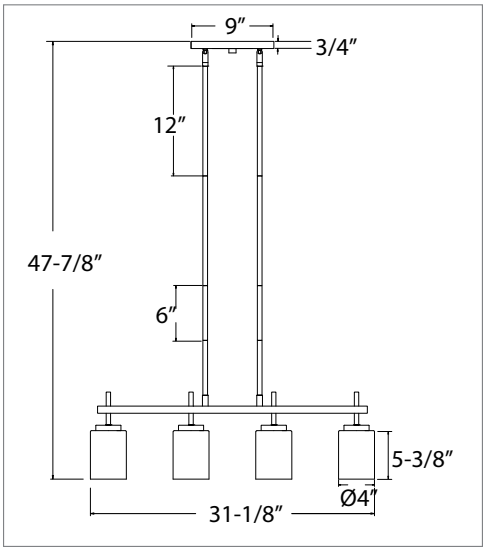

ORDERING GUIDE Example: 4604BN-4

Model	Finish		# of lights
4604	BN	Brushed Nickel	-4

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear Edge-lit LED Ribbon Light

Intertek | LED Lamp | Other Components

- 120V 60 Hz - Power Over Cable
- Metal with diffused acrylic ribbon lens
- 3000K | 80 CRI
- 28W | 1600 lms delivered
- Dimmable TRIAC, 10-100%
- Adjustable 6' wire length
- cETLus Listed for damp location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

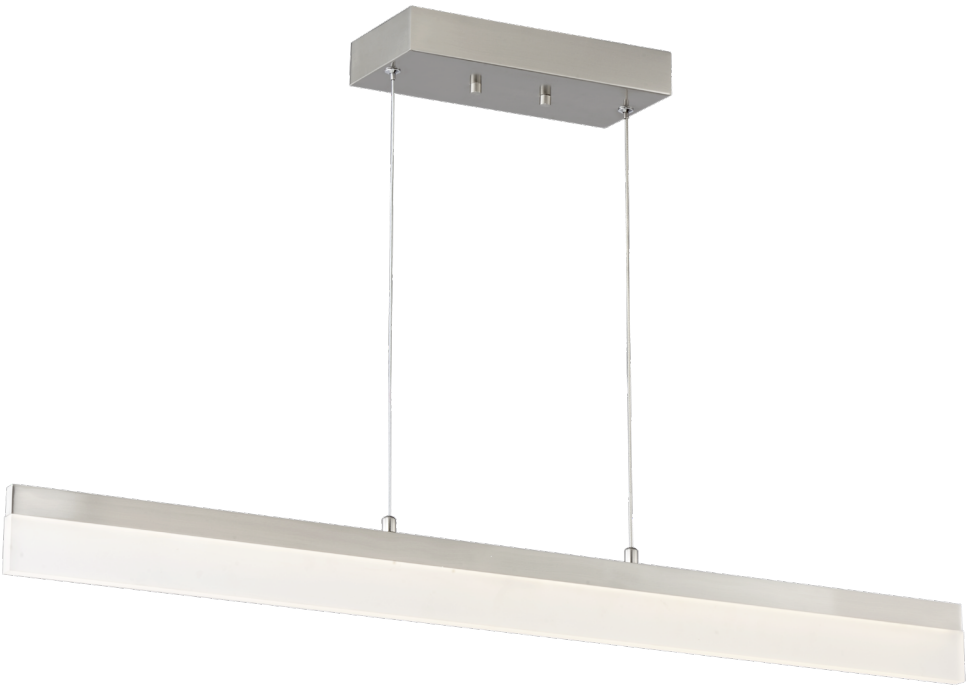

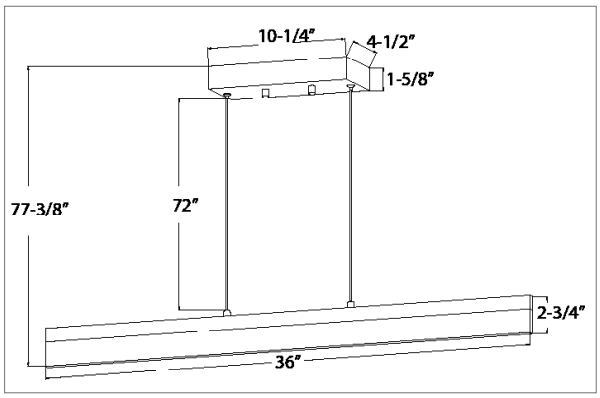

ORDERING GUIDE Example: 4600BN

Model	Finish	
4600	BN	Brushed Nickel

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Opal Glass Pendant Light

Intertek

LED Lamp

Other Components

- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 90 CRI
- 1 x 9W E26 A19 LED, lamp included
- Dimmable TRIAC, 10-100%
- Adjustable 6' Cord
- CETLus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

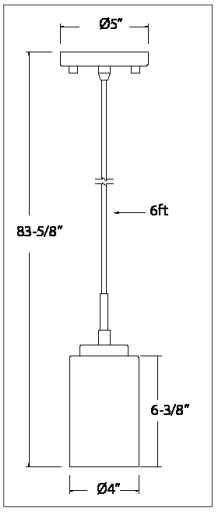

ORDERING GUIDE Example: 4606BN

Model	Finish	
4606	BN	Brushed Nickel

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Round Shade Pendant Light

4430 LED Lamp | Other Components

- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 80 CRI | 4605 - 80 CRI
- Ceiling Canopy fits standard electrical box
- 4430 - 8W | 600 lms
- 4605 - 9W E26 A19 LED Lamp Included
- Dimmable TRIAC, 10-100%
- Adjustable 6' Cord
- cETLus Listed for damp location
- Energy Star Listed
- 4430 LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

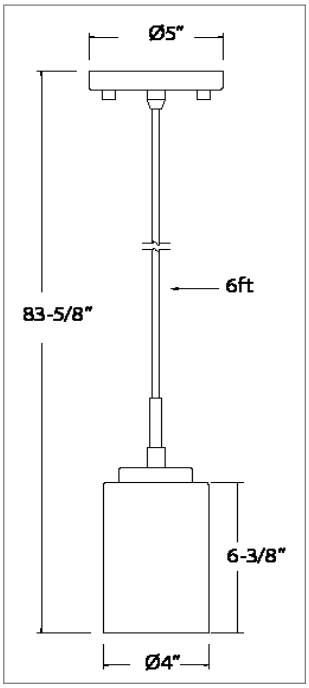

4430
Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 4430BN

Model	Finish	
4430 Integrated LED	**BN**	Brushed Nickel
	OB	Oil Rubbed Bronze
Model	**Finish**	
4605 E26 A19 LED	**BN**	Brushed Nickel

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear Lighting

Linear Lighting Overview

89xx
Slim Profile Under Cabinet Light
Page 142

89xx-2734
CCT Selectable Under Cabinet Light
Page 143

4115
Linear Stairwell - 2'
Page 144

4116
Linear Stairwell - 4'
Page 145

4105
4' LED Cloud
Page 146

4106
4' LED Cloud
Page 146

4217
4' Narrow Prismatic Wrap
Page 147

4218
4' Wide Prismatic Wrap
Page 147

4204
4' Euro Wrap
Page 147

4309-4312
2' and 4' LED Strip Light
Page 148

4117
4' Vapor Tight Linear Fixture
Page 149

4120
2' Vapor Tight Linear Fixture
Page 149

Warranty Information

Integrated LED Lights

Other Components

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Slim Profile Under Cabinet Light

LED Lamp | Other Components

- 120 V 60 Hz
- Aluminum housing with Ribbed Acrylic Curved Lens
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Available in White or Brushed Aluminum Housing
- Linkable design for hardwire and plug-in
- Hinged wiring trough for easy access
- cCSAus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

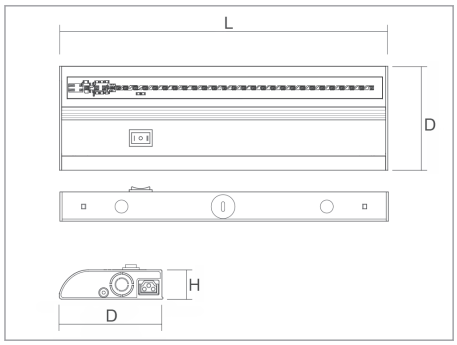

Model	Size (L x H x D)
8966	9” x 3-3/4” x 1-1/16”
8967	12” x 3-3/4” x 1-1/16”
8968	18” x 3-3/4” x 1-1/16”
8969	21” x 3-3/4” x 1-1/16”
8970	24” x 3-3/4” x 1-1/16”
8971	36” x 3-3/4” x 1-1/16”
8972	48” x 3-3/4” x 1-1/16”

Model	Wattage	Lumens (delivered)
8966	4W	200 lms
8967	5W	270 lms
8968	7W	420 lms
8969	8W	460 lms
8970	9W	580 lms
8971	13W	800 lms
8972	17W	1070 lms

ORDERING GUIDE Example: 8966WH

Model		Finish	
8966	9”	WH	White
8967	12”	BA	Brushed Aluminum
8968	18”		
8969	21”		
8970	24”		
8971	36”		
8972	48”		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

CCT Selectable Under Cabinet Light

LED Lamp | Other Components

- 120 V 60 Hz
- Aluminum housing with Ribbed Acrylic Curved Lens
- 90 CRI
- Dimmable TRIAC, 10-100%
- CCT Selectable - 2700K, 3000K, 4000K
- Available in White Housing
- Linkable design for hardwire and plug-in
- Hinged wiring trough for easy access
- cCSAus Listed for damp location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Adjusted Color of Light with Intrgrated Switch

- SOFT WHITE (2700K)
- BRIGHT WHITE (4000K)
- DAYLIGHT (5000K)

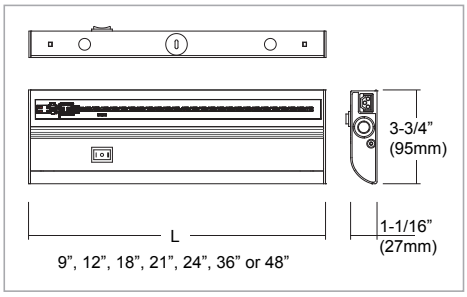

Model	Size (L x H x D)
8966WH-2734	9" x 3-3/4" x 1-1/16"
8967WH-2734	12" x 3-3/4" x 1-1/16"
8968WH-2734	18" x 3-3/4" x 1-1/16"
8969WH-2734	21" x 3-3/4" x 1-1/16"
8970WH-2734	24" x 3-3/4" x 1-1/16"
8971WH-2734	36" x 3-3/4" x 1-1/16"
8972WH-2734	48" x 3-3/4" x 1-1/16"

Model	Wattage	Lumens
8966WH-2734	4W	320lms Source, 250lms Delivered
8967WH-2734	5W	400lms Source, 315lms Delivered
8968WH-2734	7W	630lms Source, 500lms Delivered
8969WH-2734	8W	750lms Source, 595lms Delivered
8970WH-2734	9W	850lms Source, 670lms Delivered
8971WH-2734	13W	1140lms Source, 900lms Delivered
8972WH-2734	17W	1500lms Source, 1190lms Delivered

ORDERING GUIDE Example: 8966WH-2734

Model		Finish		CCT
8966	9"	**WH**	White	**-2734** 2700K, 3000K, 4000K
8967	12"			
8968	18"			
8969	21"			
8970	24"			
8971	36"			
8972	48"			

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear Stairwell - 2'

Intertek | LED Lamp | Other Components

- 120-277V Universal
- Steel Body with acrylic lens
- 4000K | 80 CRI
- 20W | 2100 lms delivered
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- Ceiling or Wall Mount
- cETLus Listed for damp location
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty

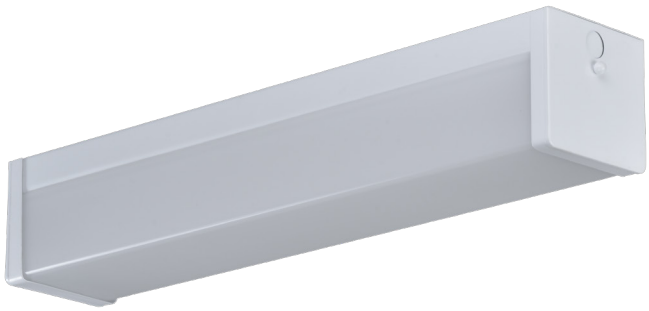

4115WH
2' Stairwell - NON-Dimmable

4115DM-WH
2' Stairwell - Dimmable 0-10V



Dimensions (L x W x H)
24-1/4" x 4-1/4" x 4-5/8"

ORDERING GUIDE Example: 4115WH-OS-EM

Model		Finish	Motion Sensor Option	EM Battery Pack Option
4115	2' Non-Dimmable	**WH** White	**-OS** adds sensor	**-EM** adds Battery Pack
4115DM	0-10V Dimmable			

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear Stairwell - 4'

4116DM | Intertek | LED Lamp | Other Components

- 120-277V Universal
- Steel Body with acrylic lens
- 4000K | 80 CRI
- Ceiling or Wall Mount
- 4116 - 38W | 4150 lms delivered
- 4116DM - 40W | 4600 lms delivered
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- cETLus Listed for damp location
- 4116DM - DLC Listed
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty

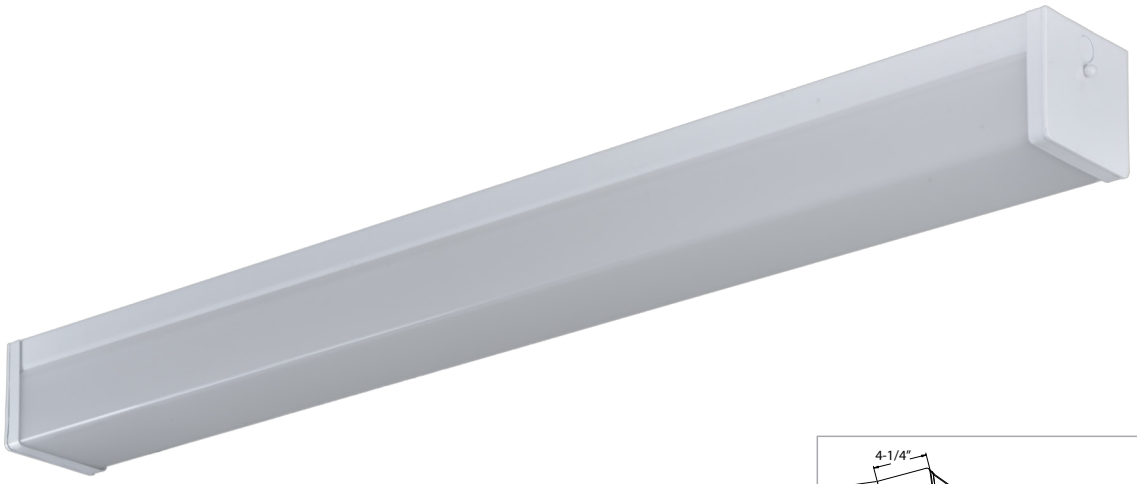

4116WH
4' Stairwell - NON-Dimmable

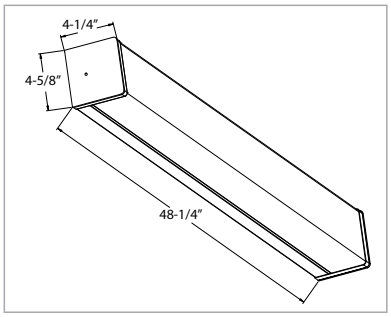

Dimensions (L x W x H)
48-1/4" x 4-1/4" x 4-5/8"

4116DM-WH
4' Stairwell - Dimmable 0-10V

ORDERING GUIDE Example: 4116WH-OS-EM

Model	Options	
4116WH	blank	no options
	-OS	adds Microwave
	-EM	add EM Battery
Model	**Options**	
4116DM-WH	blank	no options
	-OS	adds Microwave
	-EM	add EM Battery

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

LED Cloud

Intertek
LED Lamp
Other Components

- 120V / 277V
- Steel Body with white acrylic lens
- 4000K | 80 CRI
- 4105 - 35W | 2800 lms delivered
- 4106 - 70W | 5600 lms delivered
- Non-dimmable
- Ceiling Mount
- cETLus Listed for damp location
- Energy Star Listed
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty

4105-40-WH
4' Cloud

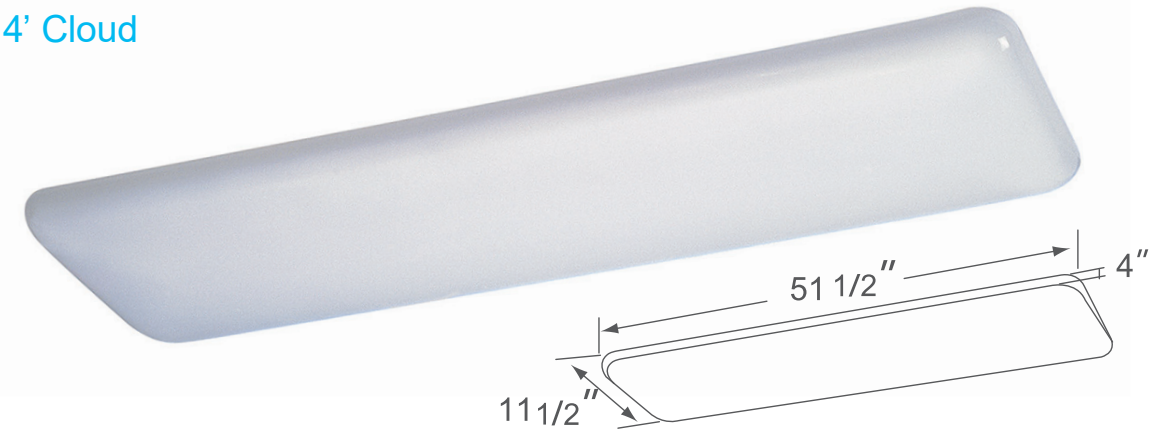

4106-40-WH
4' Cloud

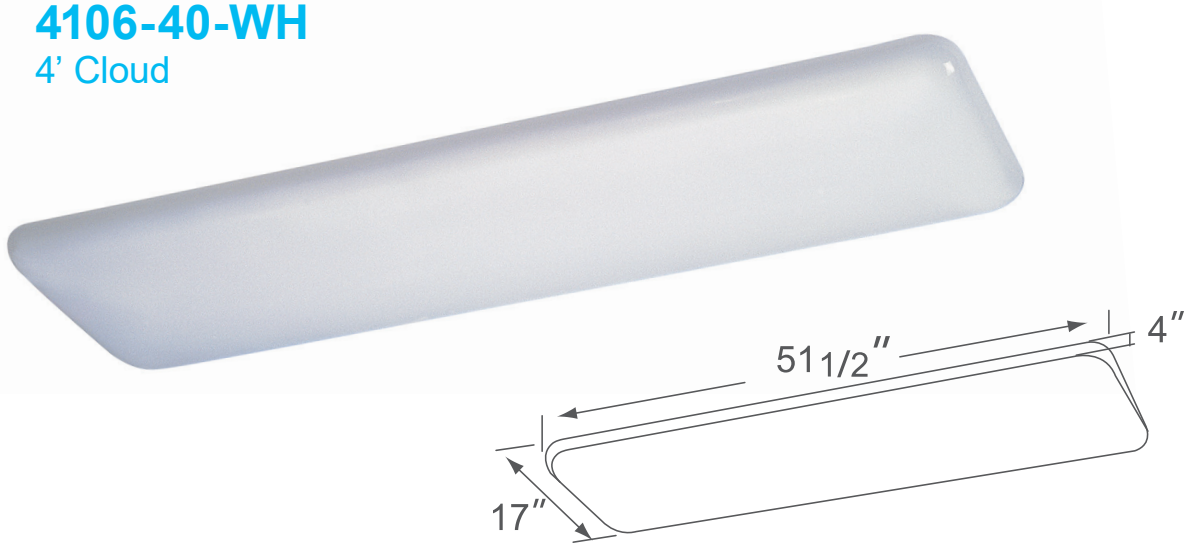

ORDERING GUIDE Example: 4105-40-WH

Model		Finish	
4105-40	35W | 2800 lms	**-WH**	White
4106-40	70W | 5600 lms		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

LED Prismatic Wraparound

Intertek | LED Lamp | Other Components

- 120V / 277V
- Steel housing with white acrylic prismatic lens
- 4000K | 80 CRI | Non-Dimmable
- Ceiling Mount
- 4217 - 35W | 3200 lms delivered
- 4218 - 75W | 7000 lms delivered
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- ETLus Listed for damp location
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty

4217WH
4' Narrow Prismatic Wrap

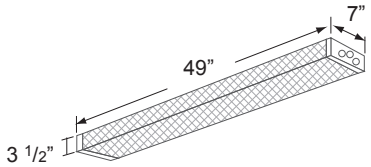

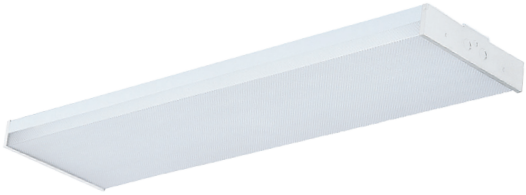

4218WH
4' Wide Prismatic Wrap

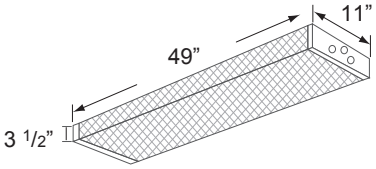

ORDERING GUIDE Example: 4117WH-OS-EM

Model	Options	
4217WH 35W | 3500 lms	blank	no options
	-OS	adds Microwave
4218WH 75W | 7000 lms	**-EM**	add EM Battery

LED Euro Wrap

Intertek | LED Lamp | Other Components

- 120V / 277V
- Steel housing with white acrylic lens and iron end caps
- 4000K | 80 CRI
- 35W | 2800 lms delivered
- Non-dimmable
- Ceiling Mount
- cETLus Listed for damp location
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty

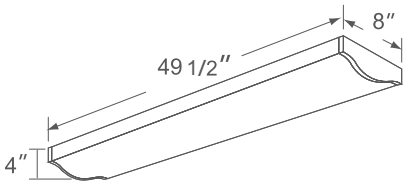

ORDERING GUIDE Example: 4204WH

Model
4204WH 4' Warp - 2800 lms

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

LED Strip Light

LED Lamp | Other Components

- 120-277V
- Steel housing with polycarbonate lens
- 4000K | 80 CRI
- Surface or Pendant Mount
- 0-10V Dimming
- Driver accessible from below ceiling
- CSAus Listed for damp location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

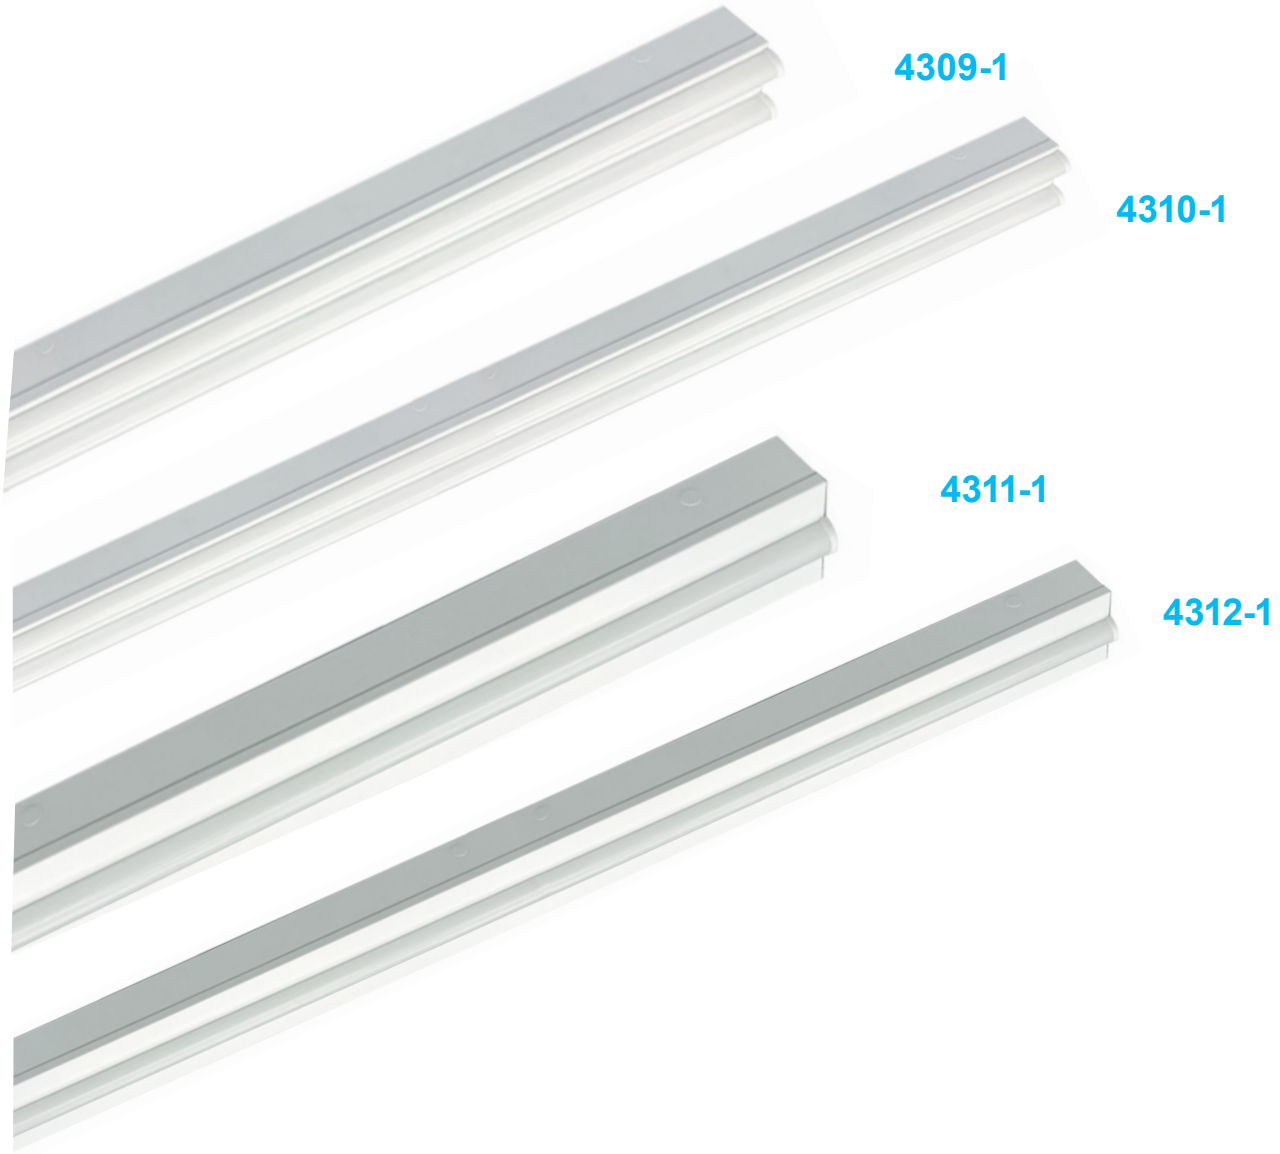

Model	Size (L x W x D)
4309-1	24” x 3-1/4” x 2-3/4"
4310-1	48” x 3-1/4” x 2-3/4"
4311-1	24” x 3-1/4" x 2-3/4"
4312-1	48” x 3-1/4" x 2-3/4"

Model	Wattage	Lumens (delivered)
4309-1	20W	2100 lms
4310-1	35W	3675 lms
4311-1	10W	1050 lms
4312-1	20W	2100 lms

ORDERING GUIDE Example: 4309WH-1

Model	EM Option
4309WH-1	**-EM** adds EM Battery Pack *
4310WH-1	
4311WH-1	
4312WH-1	

* -EM option only available on 4310WH-1 and 4312WH-1

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear Vapor Tight

4117-1

LED Lamp

Other Components

- 120-277V Universal
- Single piece polycarbonate body
- Gasketed polycarbonate lens
- Stainless Steel latches included
- 0-10V Dimming | 4000K | 80 CRI
- Operating Temp: -30oC to 50oC
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- CSAus Listed for wet location
- IP65 Rated
- 4117-1 - DLC5.1 Listed
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

4117-1 Series

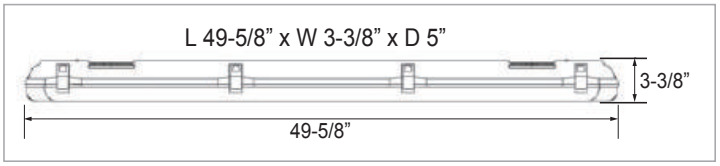

4120 Series

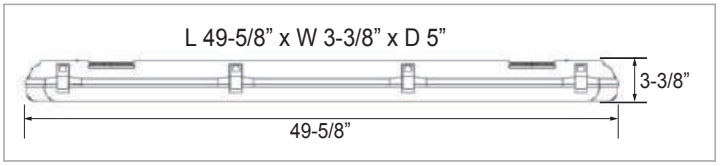

Model	Wattage	Lumens (delivered)
4120-WH	20W	2000 lms
4117-1-WH-35	35W	3675 lms
4117-1-WH-50	50W	5250 lms
4117-1-WH-70	70W	7350 lms

ORDERING GUIDE Example: 4117-1-WH-35-4K-MS-EM

Model	Options	Watts	CCT	Options	
4117-1	**-WH** White	**-35**	**-4K**	blank	no options
		-50		**-MS**	adds Microwave
		-70		**-EM**	adds EM Battery

Model	Options	
4120-WH-20-4K	blank	no options
	-MS	adds Microwave sensor

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Exit & Emergency

Exit / Emergency Lighting Overview

Exit

RXL5
Standard Exit Sign
Page 153

RXL28
Exit Sign, Wet & Cold Location
Page 153

RXL17
Surface Mount Edge-lit Exit - Single Face
Page 154

RXL18
Surface Mount Edge-lit Exit - Double Face
Page 154

RXL33
Recessed Edge-lit Exit - Single Face
Page 155

RXL34
Recessed Edge-lit Exit - Double Face
Page 155

RXL15-1
Die Cast Exit Sign - Single Face
Page 156

RXL16-1
Die Cast Exit Sign - Double Face
Page 156

RXEL35
Recessed Edge-lit Exit/ EM Combo - Single Face
Page 157

RXEL36
Recessed Edge-lit Exit/ EM Combo - Double Face
Page 157

RXEL25
Exit/Emergency Combo, Wet & Cold
Page 157

RXEL37
Standard Exit/Emergency Combo
Page 158

RXEL38
High Output Exit/ Emergency Combo
Page 158

RXEL39
High Output Remote Capable Exit/Emergency Combo
Page 159

RXEL40
High Output Self Diagnostic Exit/Emergency Combo
Page 159

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Exit / Emergency Lighting Overview

Emergency

REL35
Recessed 2-Head Emergency Light
Page 160

REL20, REL21
Compact Emergency, Compact High Output Emergency
Page 161

REL22, REL23
Remote Head Capable Emergency, Self Diagnostic Emergency
Page 162

REL6LED
Compact High-Lumen Emergency
Page 163

REL7LED
Die Cast Exit Sign
Page 164

REL5LED
Outdoor Full Cutoff Emergency
Page 164

RH17
Wet Location Remote Head
Page 165

RH18
Wet Location Remote Heads
Page 165

RH21, RH22
1 and 2 Indoor Remote Heads
Page 165

4783EM
Constant Power Emergency LED Battery Back-up
Page 166

4782EM
Emergency LED Battery Back-up
Page 166

4785
7” LED Flush Mount Emergency Back-up
Page 167

Warranty Information

Integrated LED Lights

Other Components

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Standard Exit Sign

LED Lamp | Other Components

- 120V/277V
- Flame-rated Thermoplastic Housing
- Single or Double Face
- Operating Temp: 10°C to 40°C
- 2.4V, 300 mAh Ni-Cad Battery
- Wall, Ceiling, or End Mount
- Self-diagnostic Option Available
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Green Letters with White Housing

Red Letters with White Housing

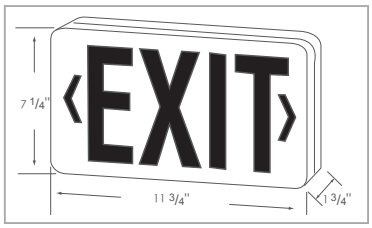

ORDERING GUIDE Example: RXL5RW

Model	Lettering/Housing	Self-diagnostic Option
RXL5 Standard Exit Sign	**RW** White with Red Lettering **RB** Black with Red Lettering **GW** White with Green Lettering **GB** Black with Green Lettering	blank no SD Option **-SD** Self-Diagnostic*

* Only available on RXL5RW and RXL5GW

Exit Sign, Wet & Cold Location

LED Lamp | Other Components

- 120V/277V
- Polycarbonate Lens and Waterproof Thermoplastic Housing
- Single or Double Face
- Operating Temp: -25°C to +50°C
- 3.6V, 400 mAh Ni-Cad Battery
- Wall, Ceiling, or End Mount
- UL Listed for wet and cold location to UL924 standards
- CEC Title 20 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Green Letters with White Housing

Red Letters with White Housing

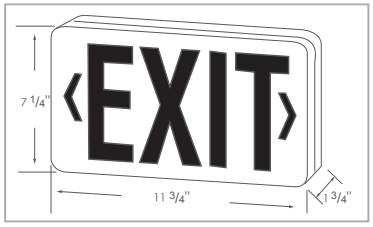

ORDERING GUIDE Example: RXL28RW

Model	Lettering/Housing
RXL28 Exit Sign, Wet & Cold Listed	**RW** White with Red Lettering **GW** White with Green Lettering

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Surface Mount Edge-lit Exit - Single Face

LED Lamp | Other Components

- 120V/277V
- Die-cast Aluminum Housing
- Clear Acrylic Thermoplastic Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

LED Green Letters, Single Face

LED Red Letters, Single Face

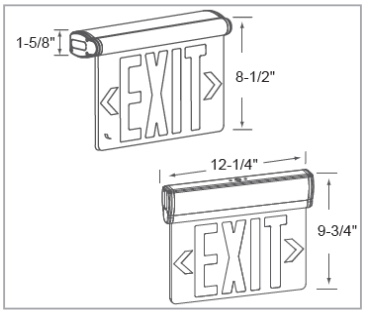

ORDERING GUIDE Example: RXL17RW

Model	Lettering/Housing	Self-diagnostic Option
RXL17 Surface Mount Edge-lit Exit - Single Face	**RW** Red w/white housing **RBA** Red w/brushed aluminum housing **GW** Green w/white housing **GBA** Green w/brushed aluminum housing	blank no SD option **-SD** Self-Diagnostic

Surface Mount Edge-lit Exit - Double Face

LED Lamp | Other Components

- 120V/277V
- Die-cast Aluminum Housing
- Clear Acrylic Thermoplastic Double Mirror Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

LED green letters, double face

LED red letters, double face

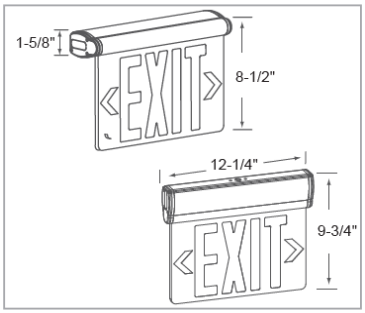

ORDERING GUIDE Example: RXL18RW

Model	Lettering/Housing	Self-diagnostic Option
RXL18 Surface Mount Edge-lit Exit - Double Face	**RW** Red w/white housing **RBA** Red w/brushed aluminum housing **GW** Green w/white housing **GBA** Green w/brushed aluminum housing	blank no SD option **-SD** Self-Diagnostic

Operation

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 24 hours.

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Recessed Edge-lit Exit - Single Face

LED Lamp | Other Components

- 120V/277V
- Aluminum Housing & Back Box
- Clear Acrylic Thermoplastic Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

LED Green Letters, Single Face

LED Red Letters, Single Face

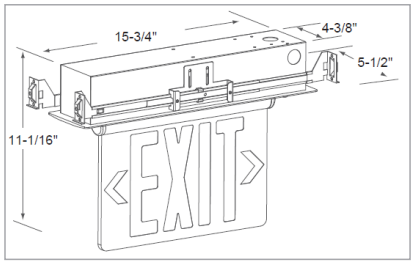

ORDERING GUIDE Example: RXL33RW

Model	Lettering/Housing
RXL33 Recessed Edge-lit Exit - Single Face	**RW** Red with white housing **RBA** Red with brushed aluminum housing **GW** Green with white housing **GBA** Green with brushed aluminum housing

Recessed Edge-lit Exit - Double Face

LED Lamp | Other Components

- 120V/277V
- Aluminum Housing & Back Box
- Clear Acrylic Thermoplastic Double Mirror Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount
- UL Listed for damp location to UL 924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

LED Red Letters, Double Face

LED Green Letters, Double Face

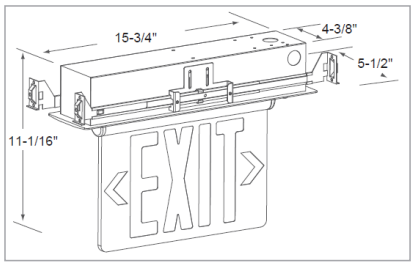

ORDERING GUIDE Example: RXL34RW

Model	Lettering/Housing
RXL34 Recessed Edge-lit Exit - Double Face	**RW** Red w/white housing **RBA** Red w/brushed aluminum housing **GW** Green w/white housing **GBA** Green w/brushed aluminum housing

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Die Cast Exit Sign - Single Face

LED Lamp | Other Components

- 120V/277V
- Die Cast Aluminum Housing
- Die Cast Aluminum Faceplate
- Operating Temp: 10°C to 40°C
- Red Lettering - 2.4V, 300 mAh Ni-cad Battery; Green Lettering - 3.6V, 300 mAh Ni-cad Battery
- Wall, Ceiling or End Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

RXL15-1GBA
LED Green Letters, Single Face

RXL15-1RBA
LED Red Letters, Single Face



ORDERING GUIDE Example: RXL15-1RBA

Model	Lettering/Housing
RXL15-1 Die Cast Exit Sign - Single Face	**RBA** Red with brushed aluminum housing **GBA** Green with brushed aluminum housing

Die Cast Exit Sign - Double Face

LED Lamp | Other Components

- 120V/277V
- Die Cast Aluminum Housing
- Die Cast Aluminum Faceplates
- Operating Temp: 10°C to 40°C
- Red Lettering - 2.4V, 300 mAh Ni-cad Battery; Green Lettering - 3.6V, 300 mAh Ni-cad Battery
- Wall, Ceiling or End Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

RXL16-1RBA
LED Red Letters, Double Face

RXL16-1GBA
LED Green Letters, Double Face

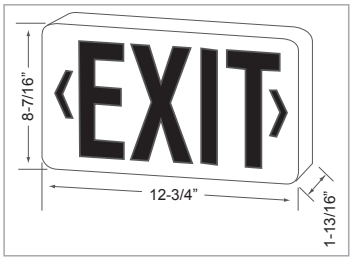

ORDERING GUIDE Example: RXL16-1RBA

Model	Lettering/Housing
RXL16-1 Die Cast Exit Sign - Double Face	**RBA** Red with brushed aluminum housing **GBA** Green with brushed aluminum housing

Operation
When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 24 hours.

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Recessed Edge-lit Exit/ Emergency Combo

LED Lamp | Other Components

- 120V/277V
- Polycarbonate Lens and Waterproof Thermoplastic Housing
- Single or Double Face
- Operating Temp: 10°C to +40°C
- 3.6V, 1800 mAh Ni-MH
- Two Adjustable Heads: 1.5W total | 250 lms total
- Wall, Ceiling or End Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

RXEL35GBA

RXEL36RBA

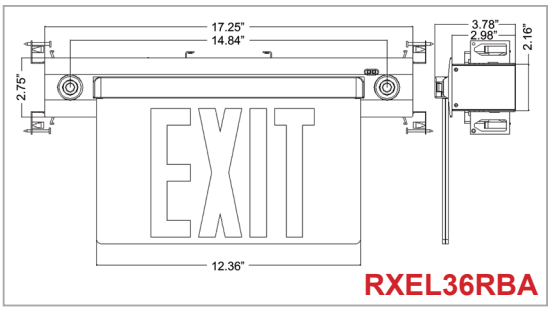

RXEL36RBA

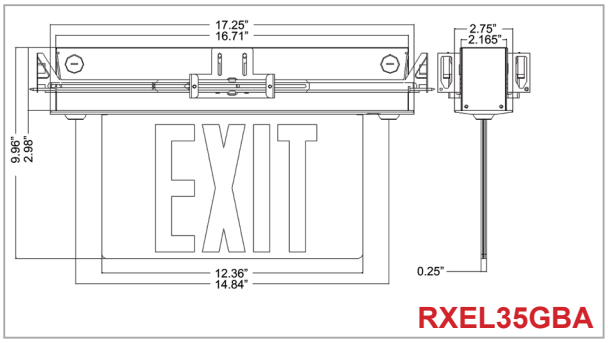

RXEL35GBA

ORDERING GUIDE Example: RXEL35RBA

Model	Lettering/Housing
RXEL35 Single Faceplate **RXEL36** Double Faceplate	**RBA** Red letters, brushed aluminum housing **GBA** Green letters, brushed aluminum housing

Exit/Emergency Combo, Wet & Cold

LED Lamp | Other Components

- 120V/277V
- Polycarbonate Lens and Waterproof Thermoplastic Housing
- Single or Double Face
- Operating Temp: -25°C to +50°C
- 2 x 3.6V, 1000 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 0.75W | 180 lms total
- Wall, Ceiling or End Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

RXEL25RW
LED red letters with white housing

RXEL25GW
LED green letters with white housing

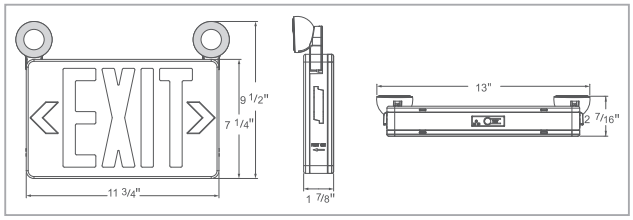

ORDERING GUIDE Example: RXEL25RW

Model	Lettering/Housing
RXEL25 Two-Head LED Exit/Emergency Combo, Wet & Cold	**RW** Red with white housing **GW** Green with white housing

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Standard Exit/Emergency Combo

LED Lamp | Other Components

- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Operating Temp 10ºC to 40ºC
- 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 1W | 150 lms total
- Wall, Ceiling or End Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

RXEL37RW
LED red letters with white housing

RXEL37GW
LED green letters with white housing

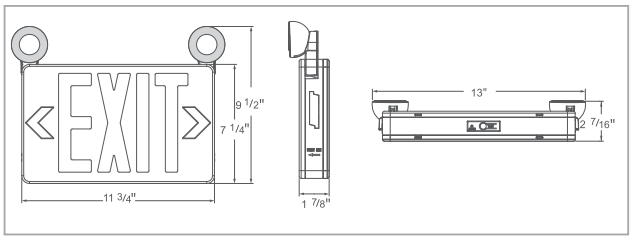

ORDERING GUIDE Example: RXEL37RW

Model	Lettering/Housing
RXEL37 Standard Exit/ Emergency Combo	**RW** Red with white housing **GW** Green with white housing

High Output Exit/ Emergency Combo

LED Lamp | Other Components

- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Wall, Ceiling or End Mount
- Operating Temp: 10°C to 40°C
- 2 x 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 2W | 250 lms total
- UL Listed for damp location to UL 924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

RXEL38RW
LED red letters with white housing

RXEL38GW
LED green letters with white housing

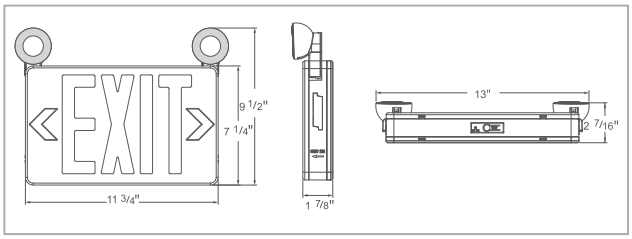

ORDERING GUIDE Example: RXEL38RW

Model	Lettering/Housing
RXEL38 High Output Exit/ Emergency Combo	**RW** Red with white housing **GW** Green with white housing

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

High Output Remote Capable Exit/Emergency Combo

LED Lamp | Other Components

- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Wall, Ceiling or End Mount
- Operating Temp: 10°C to 40°C
- 2 x 3.6V, 1500 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 2W | 250 lms total
- 3.6V, 1W or 3.6V, 2W Remote Head Available
- UL Listed for damp location to UL 924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

RXEL39RW
LED red letters with white housing

RXEL39GW
LED green letters with white housing

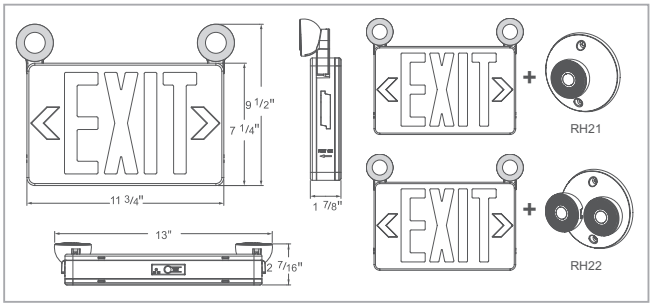

ORDERING GUIDE Example: RXEL39RW

Model	Lettering/Housing
RXEL39 High Output Remote Capabe Exit/ Emergency Combo	**RW** Red with white housing **GW** Green with white housing

High Output Self Diagnostic Exit/Emergency Combo

LED Lamp | Other Components

- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Wall, Ceiling or End Mount
- Operating Temp: 10°C to 40°C
- 2 x 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 2W | 250 lms total
- Self-diagnostic Standard
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

RXEL40RW-SD
Self-diagnostic LED red letters with white housing

RXEL40GW-SD
Self-diagnostic LED green letters with white housing

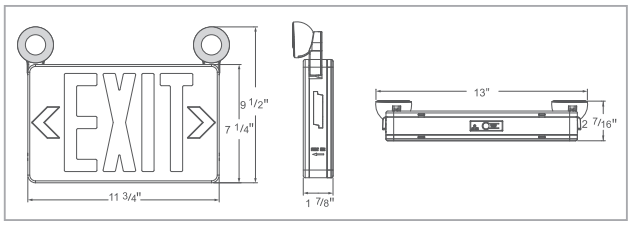

ORDERING GUIDE Example: RXEL40RW-SD

Model	Lettering/Housing	Self-diagnostic
RXEL40 High Output Self Diagnostic Exit/ Emergency Combo	**RW** Red with white housing **GW** Green with white housing	**-SD** Self-diagnostic Standard

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Recessed 2-Head Emergency Light

LED Lamp | Other Components

- 120V/277V
- Aluminum Trim Plate & Recessed Housing
- IC Rated for Recessed Ceiling or Wall Mount
- Operating Temp: 10°C to 40°C
- 3.6V, 1800 mAh Ni-MH Battery
- Adjustable Heads: 2 x 1.5W | 250 lms total
- UL Listed for damp location to UL924 standard
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

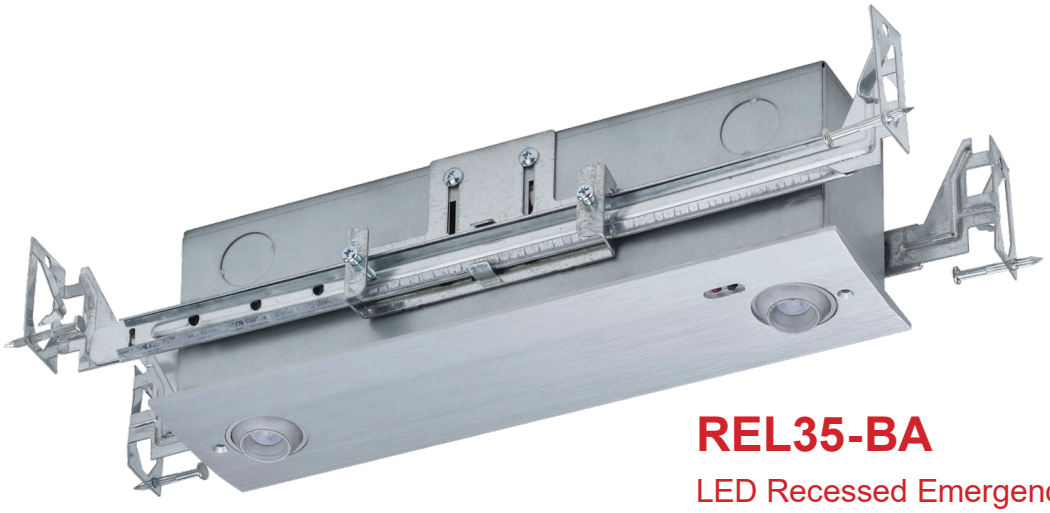

REL35-BA

LED Recessed Emergency Lighting

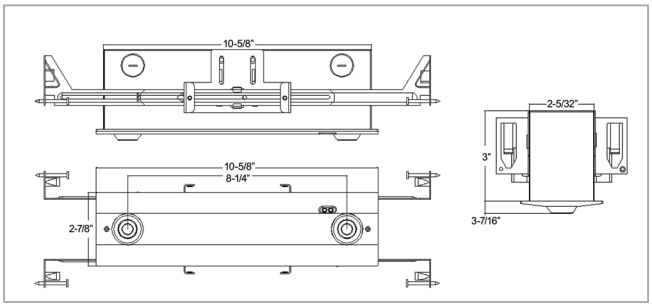

ORDERING GUIDE Example: REL35-BA

Model	Finish
REL35-	BA Brushed Aluminum

Operation

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 12 hours.

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Compact Emergency

LED Lamp | Other Components

- 120V/277V
- White Thermoplastic Housing
- Adjustable Clear Lens Heads
- Std. Operating Temp: 10°c to 40°C
- Std. 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 1W | 160 lms
- Cold Weather Option: -10°C to 40°C
- 3.6V, 1500 mAh Ni-MH Battery
- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

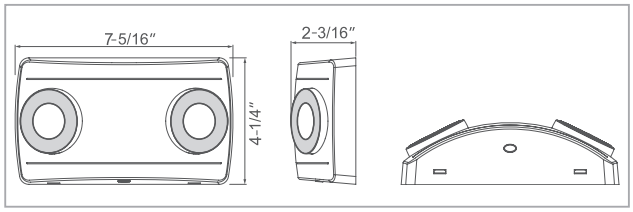

REL-200

ORDERING GUIDE Example: REL20

Model	Description
REL20	Wide Lens
REL20-N	Narrow Lens
REL20-C	Wide Lens/Cold Weather

Accessory	Description
REL-200	Wet Location Cover

Compact High Output Emergency

LED Lamp | Other Components

- 120V/277V
- Thermoplastic Housing
- Adjustable Clear Lens Heads
- Std. Operating Temp: 10°c to 40°C
- Std. 3.6V, 1500 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 1.5W | 2 x 125 lms
- Cold Weather Option: -10°C to 40°C
- 2 x 3.6V, 1500 mAh Ni-MH Battery
- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

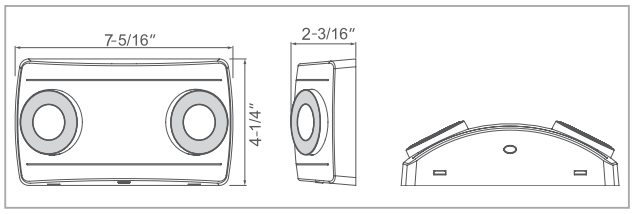

REL-200

ORDERING GUIDE Example: REL21

Model	Description
REL21	Wide Lens/White Housing
REL21-BK	Wide Lens/Black Housing
REL21-C	Wide Lens/Cold Weather/White Housing
REL21-N	Narrow Lens/White Housing

Accessory	Description
REL-200	Wet Location Cover

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Compact High Output Remote Head Capable Emergency

LED Lamp | Other Components

- 120V/277V
- White Thermoplastic Housing
- Adjustable Clear Lens Heads
- Adjustable Heads: 2 x 1.4W | 2 x 135 lms
- Std. Operating Temp: 10°C to 40°C
- 3.6V, 1500 mAh Ni-MH Battery
- 3.6V, 1W or 3.6V, 2W Remote Heads Available
- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

REL-200

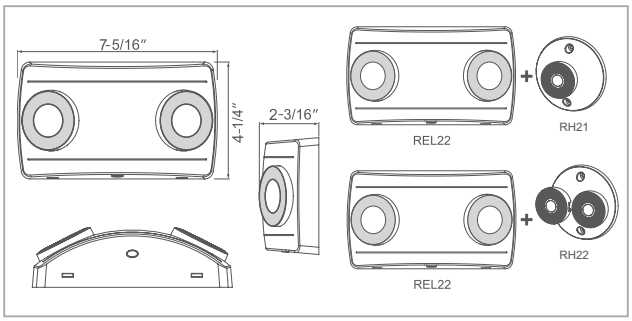

ORDERING GUIDE Example: REL22

Model	Description
REL22	Wide Lens
REL22-N	Narrow Lens

Accessory	Description
REL-200	Wet Location Cover

Compact High Output Self Diagnostic Emergency

LED Lamp | Other Components

- 120V/277V
- White Thermoplastic Housing
- Adjustable Clear Lens Heads
- Adjustable Heads: 2 x 1.4W | 2 x 135 lms
- Std. Operating Temp: 10°C to 40°C
- Std. 3.6V, 900 mAh Ni-Cad Battery
- Cold Weather Option: -10°C to 40°C; 3.6V, 1500 mAh Ni-MH Battery
- Self Diagnostic Standard
- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warrant
- Other Components: 1 Year Limited Warranty

REL-200

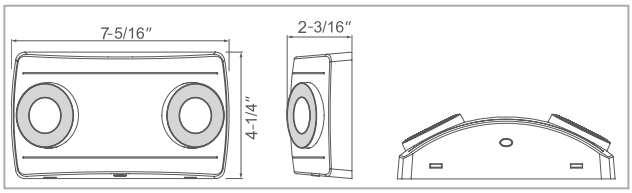

ORDERING GUIDE Example: REL23-SD

Model	Description
REL23-SD	Wide Lens/Self Diagnostic
REL23-SD-C	Wide Lens/Self Diagnostic/Cold Weather
REL23-N-SD	Narrow Lens/Self Diagnostic
REL23-N-SD-C	Narrow Lens/Self Diagnostic/Cold Weather

Accessory	Description
REL-200	Wet Location Cover

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Compact High-Lumen Emergency

LED Lamp | Other Components

- 120-277V Universal Voltage
- White Thermoplastic Housing
- High Lumen Adjustable Lens Heads
- Self Diagnostic Option Available
- Std. Operating Temp: 10°C to 40°C
- 9.6V, 3000 mAh LiFePO4 Battery High lumen
- 9.6V, 1500 mAh LiFePO4 Battery Standard lumen
- Std Output Heads: 2 x 2.7W | 600 lms total
- High Output Heads: 2 x 5.4W | 1300 lms
- 3.6V, 1W or 3.6V, 2W Remote Heads Available
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

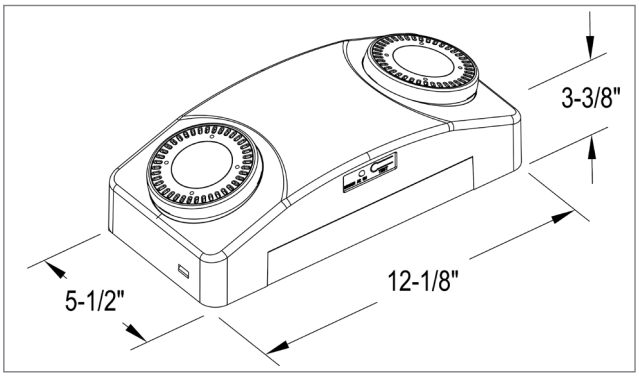

ORDERING GUIDE Example: REL6LED-WH

Model	Description
REL6LED-WH	Standard Output
REL6LED-WH-SD	Standard Output/Self Diagnostic
REL6LED-WH-HO	High Output
REL6LED-WH-HO-SD	High Output/Self Diagnostic

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Outdoor Die Cast Emergency

LED Lamp | Other Components

- 120-277V Universal Voltage
- Die Cast Aluminum Housing
- Gasketed Polycarbonate Lens
- Self Diagnostic Standard
- Photosensor Included
- Std. Operating Temp: 0°C to 50°C
- 4.8V, 1800 mAh Ni-Cad Battery
- 15W | 1300 lms | 5000K | 80 CRI
- Cold Weather Option: -20°C to 50°C
- UL Listed for damp location to UL924 standards
- IP65 Rated
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



ORDERING GUIDE Example: REL7LED-OB-C

Model	Finish	Cold Weather Option
REL7LED	**-OB** Oil Rubbed Bronze **-WH** White	**-C** Cold Weather Heatpad

Operation
When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 12 hours.

Outdoor Full Cutoff Emergency

LED Lamp | Other Components

- 120-277V Universal Voltage
- Die Cast Aluminum Housing
- Gasketed Polycarbonate Lens
- Self Diagnostic Standard
- Photosensor Included
- Std. Operating Temp: 0°C to 50°C
- 7.2V, 2000 mAh Ni-Cad Battery
- 18W | 1750 lms | 4000K | 80 CRI
- Cold Weather Option: -25°C to 50°C
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

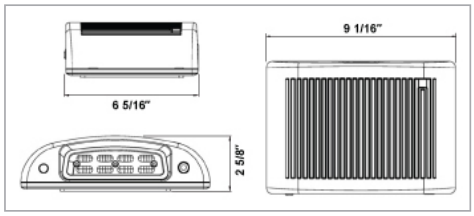

ORDERING GUIDE Example: REL5LED-OB-C

Model	Finish	Cold Weather Option
REL5LED	**-OB** Oil Rubbed Bronze **-WH** White	**-C** Cold Weather Heatpad

Operation
An ultra slim profile, integrated photocell, cold weather heatpad and emergency battery with self-diagnostics. The design provides emergency lighting that increases safety, security, and visibility in commercial and industrial applications.

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Wet Location Remote Heads

LED Lamp | Other Components

- White Thermoplastic ABS Housing
- Adjustable Heads
- DC 3V - 12V Input
- LED Lamp: 1 x 1W | 2 x 1W
- Fits Standard Electrical Box
- UL Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



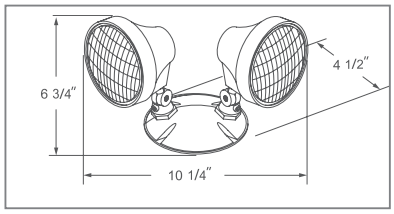

ORDERING GUIDE Example: RH17

Model	Description
RH17	Single Wet Remote Head
RH18	Double Wet Remote Heads

Indoor Remote Heads

LED Lamp | Other Components

- White Thermoplastic ABS Housing
- Adjustable Heads: Narrow and Wide Lens
- DC 3.6V Input
- LED Lamp: 1 x 1W | 2 x 1W
- Fits Standard Electrical Box
- UL Listed for damp location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



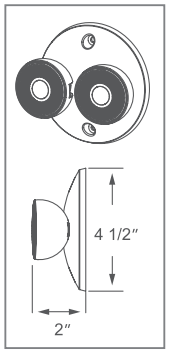

ORDERING GUIDE Example: RH21

Model	Description
RH21	Single Head/Wide Lens
RH21-N	Single Head/Narrow Lens
RH22	Double Head/Wide Lens
RH22-N	Double Head/Narrow Lens

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Constant Power Emergency LED Battery Back-up

- 120-277 Universal Voltage
- Operates for minimum 90 minutes when normal power fails
- Operating Temp: 10°C to 50°C
- 9.6V, 3000 mAh LiFePO4 Battery
- AC Input Power: 7W
- Output Power: 12W Constant Power
- Output Voltage: 10-60VDC
- UL Listed to UL924 Standard
- Field or Factory Installation (Indoor/Damp)
- IC Rated for use in Plenum
- 1 Year Limited Warranty

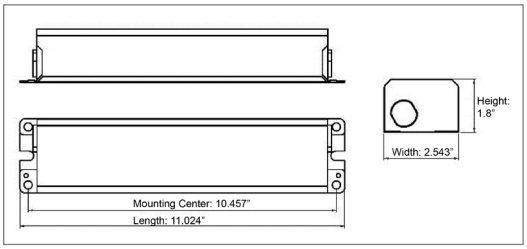

ORDERING GUIDE

Model
4783EM

Operation
Universal Battery Back-up for AC and DC LED fixtures in case of power failure.

Emergency LED Battery Back-up

- 120-277V Universal Voltage
- Operates 120V LED (120V) or DC LED (with driver) for minimum 90 minutes when normal power fails
- Operating Temp: 0°C to 50°C
- 11.1V, 2600 mAh Li-Ion Battery
- AC Input Power: 3.5W
- Output Power: 9W (+/-10%)
- Output Voltage: 24V - 120V DC
- cULus Listed to UL924 Standard
- Field or Factory Installation (Indoor/Damp)
- 1 Year Limited Warranty

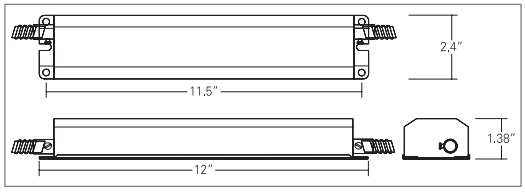

ORDERING GUIDE

Model
4782EM

Universal Battery Back-up for AC and DC LED fixtures in case of power failure.

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

7” LED Flush Mount Emergency Back-up

- 120V - 60Hz
- For use with 8536 or 8539 Disks Only
- Non-Switch Loads Only (Always On)
- Emergency Output - 600 nominal lumens
- Operating Temperature - 0°C to +55°C
- 11.1V , 2600 mAh Ni-MH Battery
- 4785EM: UL Listed for damp location to UL924 standards
- 1 Year Limited Warranty

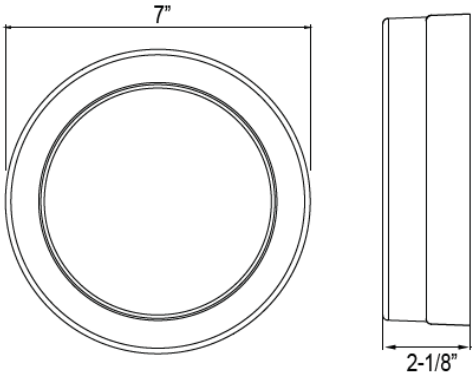

Emergency Back-Up/Empty Filler Unit, including 8536 or 8539 disk

see 8536 or 8539 for Compatible Disks
pg 108

ORDERING GUIDE Example: 4785EM

Model	Description
4785EM	EM Batter Backup with Test Switch
4785F	Empty Filler Housing Only

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Outdoor Lighting

Outdoor Lighting Overview

4423
3” LED Architectural Cylinder Downlight
Page 171

4424
3” LED Architectural Cylinder Up & Downlight
Page 171

4425
4” LED Architectural Cylinder Downlight
Page 172

4426
4” LED Architectural Cylinder Up & Downlight
Page 172

4427
4” LED Architectural Square Cylinder Downlight
Page 173

4428
4” LED Architectural Square Cylinder Up & Downlight
Page 173

4420
9” Outdoor LED Bulkhead
Page 174

4421
9” Outdoor LED Bulkhead
Page 174

4422
9” Outdoor LED Bulkhead
Page 174

Outdoor Lighting Overview

4429
Outdoor Wall Pack
Page 175

4432-1
Adjustable Full-Cutoff Wall Pack
Page 175

4715
11" Wet Location Ceiling Mount
Page 176

4401
Residential Outdoor Wall Mount
Page 177

4433
Residential Outdoor Wall Mount
Page 177

4406-30
Outdoor Wall Sconce
Page 178

4405
Outdoor Wall Lantern
Page 179

4407
Outdoor Wall Lantern
Page 180

4408
Outdoor Cone Wall Mount
Page 181

Warranty Information

Integrated LED Lights

Other Components

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

3” LED Architectural Cylinder Downlight

WET C US LED Lamp Other Components

- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms
- 17W | 1105 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)



Black (BK)

ORDERING GUIDE **Example: 4423BK-17-3K**

Model	Finish	Watts	CCT
4423	**BK** Black **BA** Brushed Aluminum **OB** Oil Rubbed Bronze	**-13** 13W **-17** 17W	**-3K** 3000K **-4K** 4000K

3” LED Architectural Cylinder Up & Downlight

WET C US LED Lamp Other Components

- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms per side
- 17W | 1105 lms per side
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

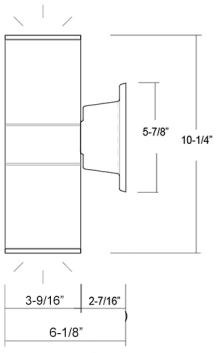

Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)

Black (BK)

ORDERING GUIDE **Example: 4424OB-13-4K**

Model	Finish	Watts	CCT
4424	**BK** Black **BA** Brushed Aluminum **OB** Oil Rubbed Bronze	**-13** 13W **-17** 17W	**-3K** 3000K **-4K** 4000K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4” LED Architectural Cylinder Downlight

LED Lamp | Other Components

- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms
- 17W | 1105 lms
- 27W | 1755 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)

Black (BK)

ORDERING GUIDE **Example: 4425BA-27-4K**

Model	Finish	Watts	CCT
4425	**BK** Black	**-13** 13W	**-3K** 3000K
	BA Brushed Aluminum	**-17** 17W	**-4K** 4000K
	OB Oil Rubbed Bronze	**-27** 27W	

4” LED Architectural Cylinder Up & Downlight

LED Lamp | Other Components

- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms per side
- 17W | 1105 lms per side
- 27W | 1755 lms per side
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

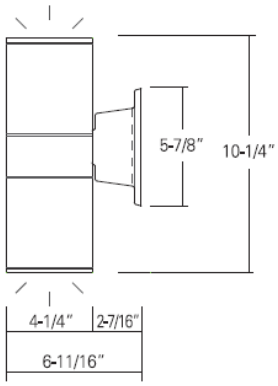

Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)



Black (BK)

ORDERING GUIDE **Example: 4426OB-13-4K**

Model	Finish	Watts	CCT
4426	**BK** Black	**-13** 13W	**-3K** 3000K
	BA Brushed Aluminum	**-17** 17W	**-4K** 4000K
	OB Oil Rubbed Bronze	**-27** 27W	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4” LED Architectural Square Cylinder Downlight

WET C US LED Lamp Other Components

- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms
- 17W | 1105 lms
- 27W | 1755 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

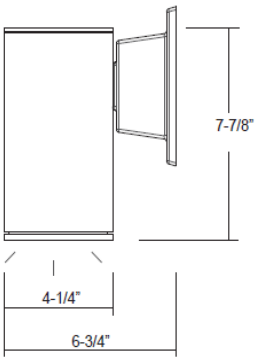

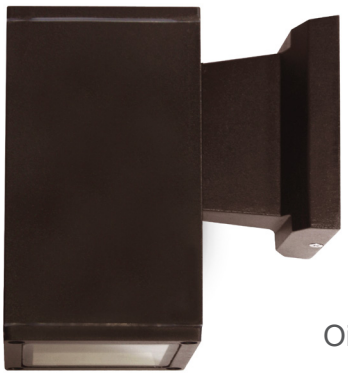

Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)

Black (BK)

ORDERING GUIDE **Example: 4427BK-17-3K**

Model	Finish	Watts	CCT
4427	**BK** Black **BA** Brushed Aluminum **OB** Oil Rubbed Bronze	**-13** 13W **-17** 17W **-27** 27W	**-3K** 3000K **-4K** 4000K

4” LED Architectural Square Cylinder Up & Downlight

WET C US LED Lamp Other Components

- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms per side
- 17W | 1105 lms per side
- 27W | 1755 lms per side
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

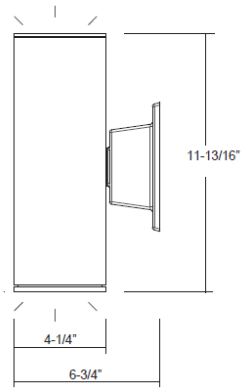

Oil Rubbed Bronze (OB)

Brushed Aluminum (BA)

Black (BK)

ORDERING GUIDE **Example: 4428BK-17-3K**

Model	Finish	Watts	CCT
4428	**BK** Black **BA** Brushed Aluminum **OB** Oil Rubbed Bronze	**-13** 13W **-17** 17W **-27** 27W	**-3K** 3000K **-4K** 4000K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

9” Outdoor LED Bulkhead

WET | C US | LED Lamp | Other Components

- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with Gasketed, frosted acrylic diffuser
- Operating Temp: -30°C to +40°C
- 4420: 15W | 850 lms
- 4421: 15W | 700 lms
- 4422: 15W | 650 lms
- Energy Star Listed
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Black (BK)

4420

Black (BK)

4421

Black (BK)

4422

4420

Oil Rubbed Bronze (OB)

4421

Oil Rubbed Bronze (OB)

4422

Oil Rubbed Bronze (OB)

Brushed Aluminum (BA)



Brushed Aluminum (BA)

Brushed Aluminum (BA)

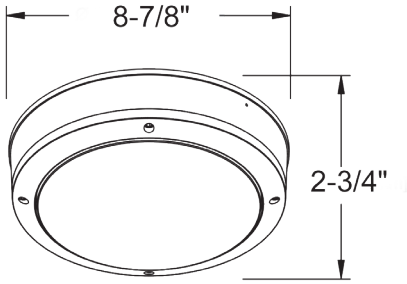

ORDERING GUIDE **Example: 4420BA**

Model	Finish	
4420	**BK**	Black
4421	**BA**	Brushed Aluminum
4422	**OB**	Oil Rubbed Bronze

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Outdoor Wall Pack

LED Lamp | Other Components

- 120V - 60Hz
- 4000K or 5000K | 80 CRI
- Die Cast Aluminum housing with hinged door frame
- Gasketed Clear Stippled Glass Lens
- Operating Temp: -30°C to +40°C
- 0-10V Dimming
- 45W | 4050 lms
- 70W | 6300 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Oil Rubbed Bronze (OB)



ORDERING GUIDE **Example: 4429OB-45-4K**

Model	Finish	Watts	CCT
4429	**OB** Oil Rubbed Bronze	**-45** 45W **-70** 70W	**-4K** 4000K **-5K** 5000K

Adjustable Full-Cutoff Wall Pack

Intertek | LED Lamp | Other Components

- 120-277V - 60 Hz
- 4000K or 5000K | 80 CRI
- Die Cast Aluminum with fresnel lens
- 0°C to 90°C Adjustable | Integrated Photocell
- Operating Temp: -40°C to 40°C
- 30W | 3600 lms | 150W HID Equivalent
- 60W | 7200 lms | 250W HID Equivalent
- 80W | 9600 lms | 350W HID Equivalent
- cETLus Listed for wet location
- IP65 Listed | DLC Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Oil Rubbed Bronze (OB)

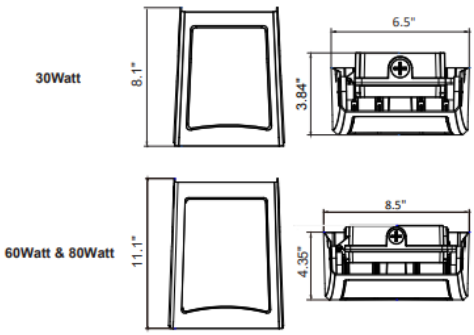

ORDERING GUIDE **Example: 4432-1OB-30-4K**

Model	Finish	Watts	CCT
4432-1	**OB** Oil Rubbed Bronze	**-30** 30W **-60** 60W **-80** 80W	**-4K** 4000K **-5K** 5000K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

11" Wet Location Ceiling Mount

Intertek | LED Lamp | Other Components

- 120V - 60Hz
- 3000K | 80 CRI
- Polycarbonate housing and diffuser
- Operating Temp: -20°C to 40°C
- 17W | 800 lms
- 11" D x 3-1/2" H
- cETLus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)

ORDERING GUIDE **Example: 4715BK**

Model	Finish	
4715	**BK**	Black
	BA	Brushed Aluminum
	OB	Oil Rubbed Bronze

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Residential Outdoor Wall Mount

WET | Intertek | LED Lamp | Other Components

- 120V - 60Hz
- 3000K | 80 CRI
- 0-10V Dimming
- Integrated Photocell
- Steel construction with acrylic lens
- Operating Temp: -20°C to 40°C
- 15W | 1050 lms
  8" x 12-1/4" x 5-1/8"
- cELTus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Black (BK)

ORDERING GUIDE **Example: 4401LED-BA**

Model	Finish
4401LED	**BK** Black

Residential Outdoor Wall Mount

WET | Intertek | LED Lamp | Other Components

- 120V - 60Hz
- 4000K | 80 CRI
- Aluminum with acrylic lens
- Integrated Photocell
- 15W | 1050 lms
  10-1/2" x 6" x 4-1/2"
- 25W | 1500 lms
  13" x 7-1/2" x 5"
- cETLus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Oil Rubbed Bronze (OB)

ORDERING GUIDE **Example: 4433OB-15-4K**

Model	Finish	Watts	CCT
4433	**BK** Black **OB** Oil Rubbed Bronze	**-15** 15W **-25** 25W	**-4K** 4000K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Outdoor Wall Sconce

LED Lamp | Other Components

- 120V - 60Hz
- 3000K | 80 CRI

- Steel construction with acrylic lens
- Operating Temp: -20°C to 40°C
- Integrated Photocell
- 15W | 800 lms
- 7" W x 9-7/8" H x 3-3/8" D

- cETLus Listed for wet location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Black (BK)

Oil Rubbed Bronze (OB)

Brushed Aluminum (BA)

ORDERING GUIDE **Example: 4406-30-BA**

Model	Finish	
4406-30	-BA	Brushed Aluminum
	-BK	Black
	-OB	Oil Rubbed Bronze

see 4404-30 for Indoor use
pg 122

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Outdoor Wall Lantern

- 120V - 60Hz
- 3000K | 90 CRI
- Integrated Photocell
- Steel construction with clear bubble glass lens
- Operating Temp: -20°C to 40°C
- 1 x 9W E26 A19 LED Lamp Included
- 11-1/2" x 6" x 8"
- cELTus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- 1 Year Limited Warranty

OUTDOOR LIGHTING

ORDERING GUIDE **Example: 4405BK-E26**

Model	Finish	
4405	**BK** Black	**-E26** 9W A19 LED Lamp Included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Outdoor Wall Lantern

- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum construction with frosted glass lens
- Operating Temp: -20°C to 40°C
- 1 x 9W E26 A19 LED Lamp Included
- 4-5/8” x 6” x 8-1/2”
- cELTus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- 1 Year Limited Warranty

ORDERING GUIDE **Example: 4407BK-E26**

Model	Finish	
4407	**BK** Black	**-E26** 9W A19 LED Lamp Included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Outdoor Cone Wall Mount

- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction
- Operating Temp: -20°C to 40°C
- 1 x 9W E26 A19 LED Lamp Included
- 10-1/2” x 11-5/8” x 8-3/4”
- cELTus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- 1 Year Limited Warranty

ORDERING GUIDE **Example: 4408BK-E26**

Model	Finish	
4408	**BK** Black	**-E26** 9W A19 LED Lamp Included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Step Lighting

Louvered Outdoor LED Step Light

WET | Intertek | LED Lamp | Other Components

- 120V - 60Hz
- 3000K | 80 CRI
- LED 5W | 60 lms
- 4-3/4" H x 9-3/8" W x 3-1/2" D
- Louvered metal front cover with clear glass lens
- Horizontal Mount Only
- Mounts in 5-gang electrical box for direct pour concrete
- cETLus Listed for wet location
- IC Rated for non-cellulous insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Black (BK)

White (WH)

Brushed Aluminum (BA)

ORDERING GUIDE **Example: 8924WH**

Model	Finish	
8924	BA	Brushed Aluminum
	BK	Black
	WH	White

Mini Louvered Outdoor LED Step Light

WET | Intertek | LED Lamp | Other Components

- 120V - 60Hz
- 3000K | 80 CRI
- LED 3W | 45 lms
- 4-1/2" H x 2-3/4" W x 3/4" D
- Louvered metal front cover with clear glass lens
- Horizontal and Vertical Mount
- Mounts in 5-gang electrical box for direct pour concrete
- cETLus Listed for wet location
- IC rated for non-cellulous insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Brushed Aluminum (BA)

White (WH)

Black (BK)

ORDERING GUIDE **Example: 8918WH**

Model	Finish	
8918	BA	Brushed Aluminum
	BK	Black
	WH	White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Mini Outdoor LED Step Light

WET | C US | LED Lamp | Other Components

- 120V - 60Hz
- 8919-1: 3000K | 80 CRI
- 8919-18K: 1800K | 80 CRI
- LED 5W | 215 lms
- 2-7/8" H x 4-3/4" W x 3/4" D
- Louvered metal front cover with acrylic lens
- Horizontal
- Mounts in a single gang electrical box
- cETLus Listed for wet location
- IC rated for non-cellulous insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Oil Rubbed Bronze (OB)



Black (BK)



White (WH)

ORDERING GUIDE **Example: 8919WH-1**

Model	Finish		Version
8919	BK	Black	-1
	OB	Oil Rubbed Bronze	
	WH	White	

Model	Finish		Version
8919	BK	Black	-18K
	OB	Oil Rubbed Bronze	
	WH	White	

Mini Lens Outdoor LED Step Light

WET | C Intertek US | LED Lamp | Other Components

- 120V - 60Hz
- 3000K | 80 CRI
- LED 4W | 120 lms
- 5" Wx 3-1/8"H
- Aluminum front cover with glass lens
- Horizontal or Vertical Mount
- Mounts in a single gang electrical box
- cETLus Listed for wet location
- IC rated for non-cellulous insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

Brushed Aluminum (BA)

Oil Rubbed Bronze (OB)

White (WH)

Black (BK)

ORDERING GUIDE **Example: 8918WH**

Model	Finish	
8920	BA	Brushed Aluminum
	BK	Black
	OB	Oil Rubbed Bronze
	WH	White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Track Lighting

Track Lighting Overview

7553
Round Flat Back
Page 188

7554
Square Flat Back
Page 188

7577
Round Back
Page 188

7574
Flair Shallow Profile
Page 188

7575
Flair Shallow Profile
Page 188

7576
Flair Shallow Profile
Page 188

7578
Tech Form
Page 189

7579, 7580
Tech Form
Page 189

7526
Gimbal Ring
Page 189

7551
Mesh Roundback Head
Page 189

7528
Gimbal Ring
Page 189

7586
Tech Form
Page 190

7587, 7588
Tech Form
Page 190

7584
Round Back
Page 190

7589
Flaired Shallow Profile
Page 190

7953, 7953-4
Track Pack, LED Track Heads
Page 191

7594
Suspended Decorative Glass
Page 191

49354-3K
3 Head Light Bar
Page 192

49353-3K
4 Head Light Bar
Page 192

49355, 4956
5 and 6 Head Light Bars
Page 193

Warranty Information

Integrated LED Lights

Other Components

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Track Heads

LED Dimmable Intertek

The small-size heads provide a compact lighting solution for residential, retail, and commercial applications. With a variety of standard finishes, simple dimmable LED lamps, and J-track compatibility these fixtures offer solid flexibility for many needs.

- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- 38º Beam Spread
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- Polycarbonate Lens
- LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

7553WH, BK, BA

Round Flat Back
8W | 650 lms

A	B	C
4-1/2”	2-3/4”	2-1/4”



7574WH, BK, BA

Flair Shallow Profile
10W | 730 lms

A	B	C
4-1/4”	4-1/4”	3-1/4”

7554WH, BK, BA

Square Flat Back
8W | 650 lms

A	B	C
4-1/2”	2-3/4”	2-1/4”

7575WH, BK, BA

Flair Shallow Profile
10W | 730 lms

A	B	C
4-1/4”	4-1/4”	3-1/4”

7577WH, BK, BA

Round Back
10W | 645 lms

A	B	C
4-1/4”	3-3/4”	2-1/2”

7576WH, BK, BA

Flair Shallow Profile
15W | 900 lms

A	B	C
4”	6-7/8”	5-3/8”

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Track Heads

LED Dimmable Intertek 5 YEAR WARRANTY

The small-size heads provide a compact lighting solution for residential, retail, and commercial applications. With a variety of standard finishes, simple dimmable LED lamps, and J-track compatibility these fixtures offer solid flexibility for many needs.

- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

7578WH, BK, BA

Tech Form
12W | 800 lms

A	B	C
6-1/4”	4-1/2”	2-5/8”

7580WH, BK, BA

Tech Form
20W | 1300 lms

A	B	C
7-1/2”	5-1/4”	4”

7579WH, BK, BA

Tech Form
12W | 800 lms

A	B	C
7-1/2”	5-1/4”	4”

Track Heads

UL 1 YEAR WARRANTY

The small-size heads provide a compact lighting solution for residential, retail, and commercial applications.

- 120V Operating Voltage
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- Lamps Not Included
- UL Listed for dry location
- 1 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

7526WH, BK, BA

Gimbal Ring
75W PAR30

A	B	C
7-1/4”	4-7/8”	3-15/16”

7528WH, BK, BA

Gimbal Ring
50W PAR20

A	B	C
6-1/2”	4-1/4”	2-5/8”

7551GWH, GBA

Mesh Roundback Head
50W GU10 lamp

A	B	C
4-1/2”	2-3/4”	2-3/16”

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Track Heads

LED Dimmable Intertek

The small-size heads provide a compact lighting solution for residential, retail, and commercial applications. With a variety of standard finishes, simple dimmable LED lamps, and J-track compatibility these fixtures offer solid flexibility for many needs.

- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- Polycarbonate Lens
- LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

7586WH, BK, BA

Tech Form
8W | 700 lms | 36º Beam Spread

A	B	C
4-4/5”	2-9/10”	2-4/5”

7584WH, BK, BA

Round Back
10W | 800 lms | 40º Beam Spread

A	B	C
3-5/8”	2-7/10”	2-1/2”

7587WH, BK, BA

Tech Form
20W | 1600 lms | 36º Beam Spread

A	B	C
4-2/5”	4-2/5”	2-4/5”

7589WH, BK, BA

Flaired Shallow Profile
15W | 1200 lms | 40º Beam Spread

A	B	C
4.25”	4-3/5"	3-7/10”

7588WH, BK, BA

Tech Form
28W | 2016 lms | 36º Beam Spread

A	B	C
6"	5-2/5”	5”

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Track Pack with LED Track Heads

LED Dimmable Intertek

- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- Acrylic Lens
- Each head: 8W | 650 lms
- LED lamps included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

7953WH, BK, BA

Included In a Single Box:
1 - 4' track (7604)
1 - Floating Feed (7629)
3 - Round Flat Back Heads (7553)

A	B	C
4-1/2”	2-3/4”	2-1/4”

7953-4WH, BK, BA

Included In a Single Box:
1 - 4' track (7604)
1 - Floating Feed (7629)
4 - Round Flat Back Heads (7553)

A	B	C
4-1/2”	2-3/4”	2-1/4”

LED Suspended Decorative Glass

LED Dimmable Intertek

- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- 6’ Adjustable Hanging Cord
- Use RPL+F Track (sold separately)
- 7W | 450 lms | LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty

Finishes Available: White glass with Brushed Aluminum Cord (WBA), Amber Glass with Brushed Aluminum Cord (ABA)

7594ABA

7594WBA

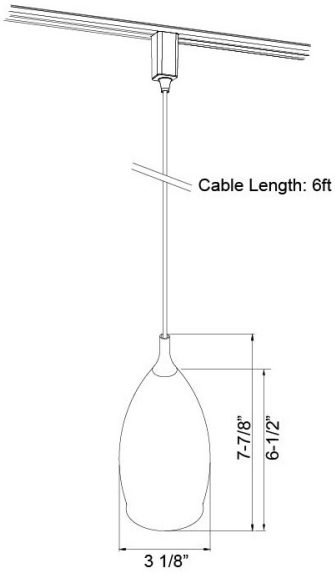

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

3 or 4 Head Light Bar

LED Dimmable ENERGY STAR Intertek 5 YEAR WARRANTY

Contemporary, clean and cool, this eye-catching LED light bar incorporates a subtle wave, providing an instant touch of classic, yet modern design. An ideal choice for enhancing the look and feel of almost any interior space, great for residential kitchens, bars, and hospitality applications.

- 120V Operating Voltage
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- 330º Horizontal Head Rotation
- 90º Vertical Head Rotation
- 74º Beam Spread
- LED Lamps Included
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty

49354-3K-BN

Available in Brushed Nickel (BN)
3-Track Heads | 15W | 950 total lms

49353-3K-BN

Available in Brushed Nickel (BN)
4-Track Heads | 20W | 1481 total lms

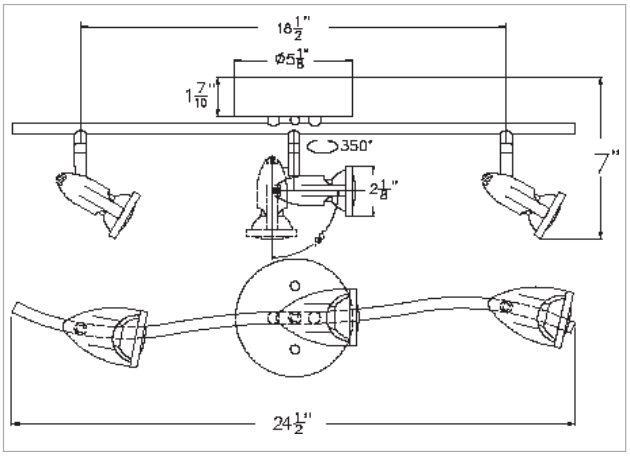

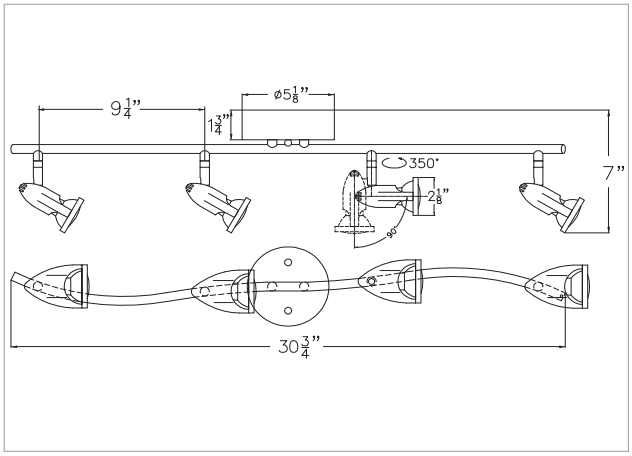

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

5 or 6 Head Light Bar

LED Dimmable Intertek 5 YEAR WARRANTY

Contemporary, clean and cool, this eye-catching LED light bar incorporates a subtle wave, providing an instant touch of classic, yet modern design. An ideal choice for enhancing the look and feel of almost any interior space, great for residential kitchens, bars, and hospitality applications.

- 120V Operating Voltage
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- 330º Horizontal Head Rotation
- 90º Vertical Head Rotation
- 74º Beam Spread
- LED Lamps Included
- cETLus Listed for damp location
- 5 Year Limited Warranty

TRACK LIGHTING

49355BN

Available in Brushed Nickel (BN)
5-Track Heads | 22W |
1400 total lms

49356BN

Available in Brushed Nickel (BN)
6-Track Heads | 28W |
1750 total lms

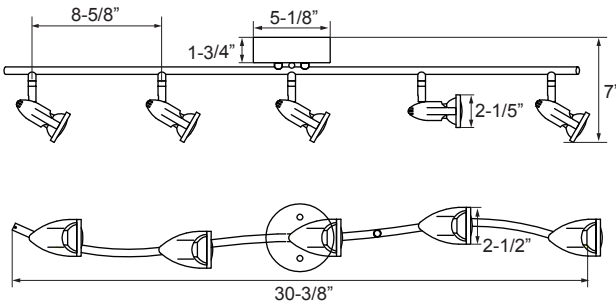

5 head Light Bar

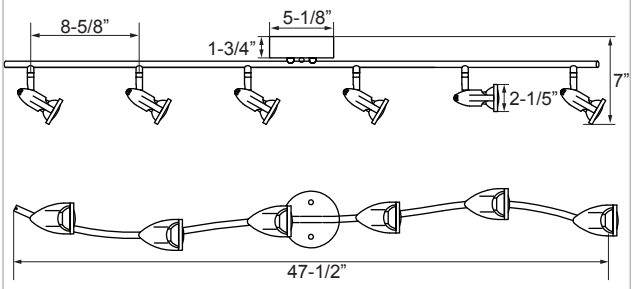

6 head Light Bar

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Track Section

RP Lighting's J-track is designed to be affordable yet flexible to provide dramatic lighting where you need it.

Available in: White (WH), Black (BK), Brushed Aluminum (BA)

7602WH, BK, BA 2' Track
7604WH, BK, BA 4' Track
7606WH, BK, BA 6' Track
7608WH, BK, BA 8' Track



Connector

Single Circuit

A. The best possible electrical conductivity due to Beryllium copper contacts
B. True, positive electrical ground wire
C. Spring-loaded positive latch secures track fixtures to track
D. Embossed polarity arrows on side of adapter

To ensure correct installation, each section has a polarity line indicating the positive conductor side. Both lights and track connectors, when installed properly, have arrows which point to the track polarity line.



Track Lighting Accessories

7620WH, BK
Wireway Cover
Color: white (WH), black (BK)

7621WH, BK
Live End-Feed with Canopy
Color: white (WH), black (BK)

7622WH
Live-End Feed with
10' cord included
Color: white (WH)

7623WH, BK, BA
Mini-Straight Connector
Color: white (WH), black (BK), brushed aluminum (BA)

7624WH, BK, BA
L-Connector/
Straight Connector
Color: white (WH), black (BK), brushed aluminum (BA)

7625WH, BK
T-Connector
Color: white (WH), black (BK)

7629WH, BK, BA
Floating Feed
Color: white (WH), black (BK), brushed aluminum (BA)

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Track Lighting Accessories

7626WH, BK
X-Connector
Color: white (WH), black (BK)



7634WH, BK, BA
Conduit Connector
Color: white (WH), black (BK), brushed aluminum (BA)

7638WH, BK, BA
Live End Feed
Color: white (WH), black (BK), brushed aluminum (BA)

7640WH, BK, BA
Mono-Point Adapter
Color: white (WH), black (BK) brushed aluminum (BA)



7642WH, BK
Flexible Connector
Color: white (WH), black (BK)

7644WH, BK
Pendant Adapter
Color: white (WH), black (BK)
20LB Weight Limit

7646WH, BK
T-Bar Connector
Color: white (WH), black (BK)

7647WH, BK, BA
H-track Connector
Color: white (WH), black (BK), brushed aluminum (BA)

7652WH, BK
Suspension Hook
Color: white (WH), black (BK)

7653
T-Bar Clip

7681WH, BK, BA
End Cap
Color: white (WH), black (BK), brushed aluminum (BA)

7694WH, BK
Slope Ceiling Adapter
Color: white (WH), black (BK)

Track Extension Wand
Includes: Connector to Track, Extension Wand, Adapter for Track Head
Color: white (WH), black (BK)

7684-12WH, BK
12" Extension Wand

7684-18WH, BK
18" Extension Wand

7684-24WH, BK
24" Extension Wand

7695WH
Suspension Cable
Includes 48" cable connection to back of track.
Color: white (WH)

Suspension Kit
Includes: canopy, stem length, connection to back of track

7654-12WH, BK
12” Suspension Stem Kit

7654-18WH, BK
18” Suspension Stem Kit

7654-24WH, BK
24” Suspension Stem Kit

7654-36WH, BK
36” Suspension Stem Kit

7654-48WH, BK
48” Suspension Stem Kit

Color: white (WH), black (BK)

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Index

1004-E26-L....14
1005-E26-L....18
1005LED.... 18
1007-E26-L....15
1007LED....15
1008LED....14
1015W....35
1016W....36
1021-PC....28
1022-PC....28
1023-PC....29
1024-PC....29
1025-E26-L....19
1025LED....19
1032....41
1041-E26-L....16
1041LED....16
1042-E26-L....20
1042LED....20
1043LED....13
1044LED....17
1045LED....21
1046....23
1046LED....23
1047....25
1047LED....25
1048....27
1048LED....27
1049-E26-L....12
1049LED....12
1051....45
1052....42
1053....43
1054....43
1057-L....40
1062-1....44
1063-1....44
1064-1....44
1065....26
1065LED....26
1067....32
1068....33
1069....34
1070W....37
1071....24
1071LED....24
1072-PC....31
1072LED-PC....31
1073-PC....30
1073LED-PC....30
1074....22
1074LED....22
1078-E26-L....11
1078LED....11
1079-E26-L....10
1079LED....10
1080W....37
1088....38
1088LED....38
1091....39
1RP18-ES....46
1RP18-SG-ES....46
1RP22-ES....47
1RP28-E26-L....48
1RP31-LE....48
1RP32-LED....48
1RP69LED....48
1RP8-ES....46
1RP82-ES....47
1RP83-LED....48
1RP84-LED....48
1RP88LED....48
1RP89LED....48
2004CG....49
2004FG....49
2015CG....49
2015FG....49
2021G....49
2061G....49
3001G....49
4105....146
4106....146
4115....144
4115DM....144
4116....145
4116DM....145
4117-1....149
4120....149
4204....147
4217....147
4218....147
4309-1....148
4310-1....148
4311-1....148
4312-1....148
4313-1....112
4314-1....112
4318-1....112
4319....107
4320....120
4322....120
4325D-1....109
4326D-1....109
4327D-1....109
4328-1....111
4329-1....111
4330-1....111
4333....115
4334....115
4335....115
4336....120
4337....120
4338....120
4340....113
4345....112
4347....114
4348....115
4350....109
4401LED....177
4404....122
4405....179
4406....178
4407....180
4408....181
4420....174
4421....174
4422....174
4423....171
4424....171
4425....172
4426....172
4427....173
4428....173
4429....175
4430....139

Specifications and dimensions subject to change
see website for most current information

Index

4432-1....175
4433....177
4503....121
4505....121
4506....107, 130
4600....137
4601....135
4602....135
4603....134
4604....136
4605....139
4606....138
4715....114, 176
4782EM....166
4783EM....166
4785EM....167
4785F....167
4904....127
4905....107, 131
4906....128
4907....129
4908....127
4909....126
49353....192
49354....192
49355....193
49356....193
4-JBR....91
7526....189
7528....189
7551....189
7553....188
7554....188
7574....188
7575....188
7576....188
7577....188
7578....189
7579....189
7580....189
7584....190
7586....190
7587....190
7588....190
7589....190
7594....191
7602....194
7604....194
7606....194
7608....194
7620....194
7621....194
7622....194
7623....194
7624....194
7625....194
7626....195
7629....194
7634....195
7638....195
7640....195
7642....195
7644....195
7646....195
7647....195
7652....195
7653....195
7654....195
7681....195
7684....195
7694....195
7953....191
7953-4....191
8041....76
8061....76
8081....76
8091A....103
8096A....103
8096B....64, 70, 72, 73, 74, 103
8097A....103
8098A....103
8102HAQ....88
8102HRA....88
8104HICA....88
8116HIC....87
8117HA....82
8117HRA....82
8120H....64
8120HIC....64
8121H....64
8122H....70
8122HIC....70
8124H....70
8125H....74
8125HIC....74
8126H....74
8162H....72
8163H....73
8164H....76
8164HIC....76
8166H....76
8166HIC....76
8168H....76
8168HIC....76
8199HICA-FR....68
8201HA....84
8201HRA....84
8202HA....84
8215HA....80
8215HRA....80
8317H....78
8317HR....78
8320H....62
8321H....62
8502....90
8504....90
8505....90
8511....90
8519....90
8523....69, 83, 89
8536....97, 108
8538....89, 101, 118
8539....97, 108
8542-2....92
8544....90
8545....95
8548....98, 110
8554....102, 119
8556....90, 99, 116
8556-S....100, 117
8557....100, 117
8562....69, 83, 89
8563....69, 83, 89
8564....89

Index

8567....89
8568....69, 83, 89
8569....90, 101, 118
8570....87
8571....87
8572....87
8573....87
8586....65
8587....65
8590....65
8642....93
8651....71
8652....71
8653....71
8655....71
8656....72
8671....75
8673....75
8676....73
8701....86
8702....86
8705....86
8708....91
8711....91
8722....85
8739....97, 108
8742-2....92
8748....98, 110
8756....85, 99, 116
8761....85
8763....67, 81, 85
8765....85
8768....85
8769....67, 81, 86
8770....67, 81, 86
8771....67, 81, 86
8773....67, 81, 86
8775....94
8776....96
8821-1....79
8822-1....79
8823....79
8824....79
8825....79
8842....93
8861....63
8862....63
8918....183
8919-1....184
8919-18K....184
8920....184
8924....183
8966....142
8966-2734....143
8967....142
8967-2734....143
8968....142
8968-2734....143
8969....142
8969-2734....143
8970....142
8970-2734....143
8971....142
8971-2734....143
8972....142
8972-2734....143
DC....52
E12....52
E18....52
E24....52
E36....52
E48....52
E60....52
E72....52
ER36....52
ER48....52
ER60....52
FF109-300....103
FF-109-350....103
FF109X....103
LC-102....50
LC-79....50
LK10....49
LK12....49
LK30....49
LK412....49
PF-3....93, 103
PF-4....92, 94, 96, 103
PF-6....92, 95, 103
RC-10....51
REL20....161
REL21....161
REL22....162
REL23-N-SD....162
REL23-SD....162
REL-200....161, 162
REL35....160
REL5LED....164
REL6LED....163
REL7LED....164
RH17....165
RH18....165
RH21....165
RH22....165
RXEL25....157
RXEL35....157
RXEL36....157
RXEL37....158
RXEL38....158
RXEL39....159
RXEL40....159
RXL15-1....156
RXL16-1....156
RXL17....154
RXL18....154
RXL28....153
RXL33....155
RXL34....155
RXL5....153
SA45....53
T-09....52
WC-3....51
WC-4....51
WC-8....51
WC-13....51
WC-16....51

Specifications and dimensions subject to change
see website for most current information

Notes:

RP LIGHTING • FANS

4931 Paseo Del Norte NE
Albuquerque, NM 87113

www.rplighting.com

Phone: (505) 821-6964
Toll Free: (800) 937-6925

Fax: (505) 821-0367
Toll Free: (800) 207-9509

Email: rplighting@rplighting.com

© 2021 RP Lighting • Fans

RP | LIGHTING • FANS