


4328-1, 4329-1, 4330-1

120V-60Hz

Catalog #:		Type
Project:		Date
Prepared by:		

11" / 13" / 15" Square Ceiling Mount

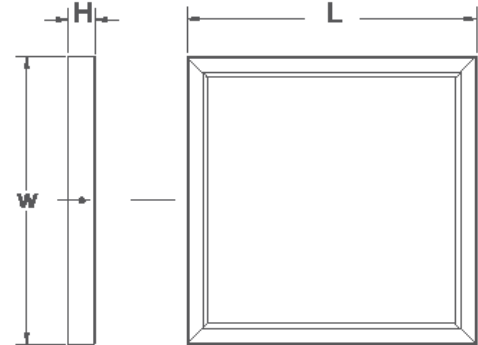

4328-1: 11" x 11" x 1-1/4" Square

4329-1: 13" x 13" x 1-1/4" Square

4330-1: 15" x 15" x 1-1/4" Square

DESCRIPTION

This low-profile large square has a thin design that is Energy Star listed and CEC JA8 compliant that can be used in many applications such as hallways and corridors with low ceiling heights.

DESIGN FEATURES

Construction

- Steel housing with acrylic diffuser
- Low-profile 1.25" height

Electrical

- 120V - 60Hz AC
- Dimmable TRIAC, 10-100%
- Beam angle: 120°
- 50,000 hour projected life
- 3000K or 4000K | 90 CRI
- 4328-1: 11" Square | 15W | 988 lms (delivered)
- 4329-1: 13" Square | 20W | 1199 lms (delivered)
- 4330-1: 15" Square | 30W | 1776 lms (delivered)

Installation

- Included Mounting Bracket: Accommodates 3" or 4" J-Box applications

Certifications

- ETL Listed for damp location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

ORDERING GUIDE

Example: 4328-1BN-3K

Model #	Finish	CCT
4328-1	BN : Brushed Nickel	-3K : 3000K
4329-1	WH : White	-4K : 4000K
4330-1		

Please refer to 4328-T, 4329-T, 4330-T Spec Sheet for DC Square Ceiling Mount Units.
Other finishes available by Special Order.

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



Intertek

LED Lamp

Other Components

4/3/23 R2



RP LIGHTING · FANS

11" / 13" / 15" Square Ceiling Mount