


# 8536-1

120V

|              |  |      |
|--------------|--|------|
| Catalog #:   |  | Type |
| Project:     |  | Date |
| Prepared by: |  |      |

## 7" LED Slim Round Disk

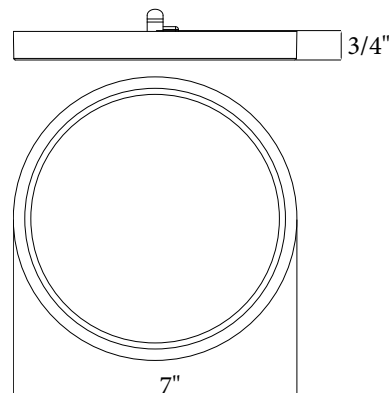

### DESCRIPTION

A slim round LED Edge-lit Disk light that is an affordable, attractive and versatile solution for a slim-profile surface mount downlight. Suitable for use in wet locations, this is a great choice for most any residential or light-commercial application.

### DESIGN FEATURES

#### Construction


- Metal backplate and heat sink
- Frosted acrylic layered diffuser to reduce glare and provide even light distribution

#### Electrical

- 120V-60Hz
- Dimmable TRIAC or ELV, 10-100%
- 50,000 hour projected life
- 80 CRI | 15W | 1227 lms (delivered)
- 90 CRI | 15.5W | 1080 lms (delivered)
- 3000K or 4000K or 5CCT Selectable: 27K, 3K, 35K, 4K, 5K

#### Installation

- Mounting bracket included for installation in 3" or 4" J-Box applications
- Retrofit option includes torsion springs and E26 base adapter for mounting in 5/6" housings

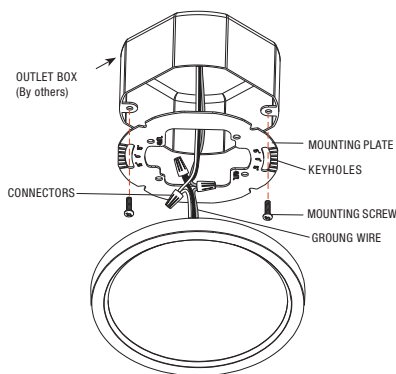

#### EM Battery Pack (sold separately)

- Empty Filler Housing also available
- See page 2 for further information

#### Certifications

- CEC JA8 Compliant: 90 CRI Dedicated CCT Units Only
- Energy Star Listed: 90 CRI Dedicated CCT Units Only
- 8536-1: cCSAus Listed for wet location
- LED Light Source: 5 Year Limited Warranty
- Non-Electrical: 1 Year Limited Warranty
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (C)(1)

**ORDERING GUIDE** Example: 8536-1WH-80-3K-R

| Model # | Finish                                                                   | CRI        | CCT                                 | Retrofit                             |
|---------|--------------------------------------------------------------------------|------------|-------------------------------------|--------------------------------------|
| 8536-1  |                                                                          |            |                                     |                                      |
| 8536-1  | BN: Brushed Nickel*<br>BK: Black**<br>OB: Oil Rubbed Brz***<br>WH: White | -80<br>-90 | -3K : 3000K<br>-4K : 4000K<br>-5CCT | (blank) No Retrofit<br>-R : Retrofit |

\* BN finish only available in -3K and -5CCT

\*\* BK finish only available in -80-3K or -90-4K; see 8536 spec sheet for BK finish in -90-3K

\*\*\* OB finish only available in -3K

**ORDERING GUIDE** Example: 4785WH-EM

| Model # | Finish                                                             | Option                                                                  |
|---------|--------------------------------------------------------------------|-------------------------------------------------------------------------|
| 4785    |                                                                    |                                                                         |
| 4785    | BN: Brushed Nickel<br>BK: Black<br>OB: Oil Rubbed Brz<br>WH: White | -EM : Battery Backup with Test Switch<br>-F : Empty Filler Housing Only |

-EM Version not available in BN and OB finishes

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.



90 CRI Only  
Dedicated CCT

90 CRI Only  
Dedicated CCT

LED Light Source  
Non electrical

8/13/26 R7




RP LIGHTING • FANS

8536-1 - 7" LED Slim Round Disk

# 4785EM

120V-60Hz

## 7" LED Flush Mount Emergency Battery Back-up

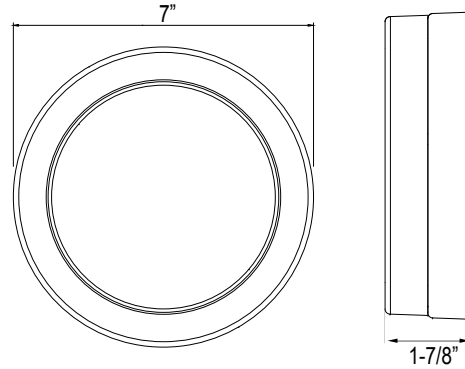

Emergency Back-Up or Empty Filler Unit, including 8536-1

### DESCRIPTION

For use with the RP Lighting's 8536-1 disk, this maintenance-free emergency battery back-up unit with rechargeable Ni-MH battery allows for emergency power down corridors or open applications. With the blank empty filler unit you can now have a similar appearance in the space when using the emergency unit.

### DESIGN FEATURES

#### Construction

- Durable metal backplate and heat sink to facilitate heat dissipation

#### Electrical

- 120V - 60Hz
- Non-Switch Loads Only (Always On Applications)
- Battery - 11.1V / 2.6Ah Ni-MH Re-chargeable; up to 24 hours charge time
- Emergency Output - 20% of nominal power
- Provides over 120 minutes when normal power fails
- LED Indications - Red - Charging; Green - Fully Charged; Yellow - Faulty
- Operating Temperature - 0°C (32°F) to +55°C (+131°F)
- Test Switch / Charging Indicator Light: 4W-ITS (4-wire illuminated test switch) included on 4785EM

#### Installation

- For use with 8536-1 disks from RP Lighting
- One-piece emergency battery back-up unit allowing for 3" or 4" J-Box installation

#### Certifications

- 4785-EM: cCSAus Listed to UL924 standards
- cCSAus listed for damp location
- 4785-EM: 1 Year Limited Warranty
- 4785-F: 1 Year Limited Warranty

#### J-Box Mounting

