


REL20-1

120/277V AC

Catalog #:		Type
Project:		Date
Prepared by:		

Compact Emergency

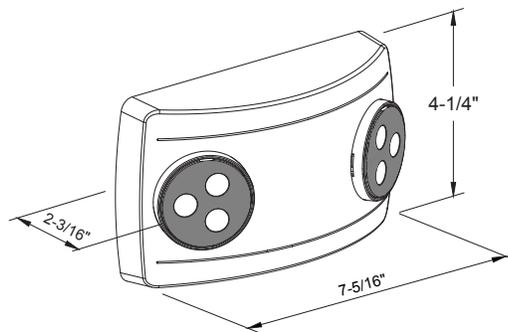

DESCRIPTION

Simple and compact, this emergency unit has adjustable heads that allows for light to go where you want. For use down hallways and smaller areas where emergency lighting is a must.

DESIGN FEATURES

Construction

- Injection molded thermoplastic ABS housing with 5VA flame retardant
- Adjustable Clear Lens Heads

Electrical

- 120/277V AC Dual Voltage; 60 Hz
- Standard Operating Temperature: 10°C (50°F) to 40°C (104°F)
- 2 Adjustable 1W LED Heads | 235 lms total | 5700K CCT
- 3.6V, 800 mAh, rechargeable Ni-Cad HT battery
- 24 hour recharge after 90 minute discharge
- Manual test switch and LED indicator on side of unit
- 90 minutes of illumination in case of power failure

Installation

- Suitable for ceiling and wall mount over standard recessed J-Box configuration
- Top and side knockouts for conduit applications

Dimensions

- 7-5/16" W x 2-3/16" D x 4-1/4" H

Certifications

- UL Listed for damp location to UL924 standards
- Meets and exceeds all appropriate NFPA life safety codes
- LED Light Source: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

ORDERING GUIDE

Example: REL20-1

Model #
REL20-1
REL20-1 Wide Focal Lens

For Narrow Lens or Cold Weather Option units, please refer to REL20 Spec Sheet



LED Light Source

Other Components



REL20-1

120/277V AC

Spacing Information

