


RXEL39-1

120-277V AC

| | | |
|--------------|--|------|
| Catalog #: | | Type |
| Project: | | Date |
| Prepared by: | | |

High Output Remote Capable Exit/Emergency Combo

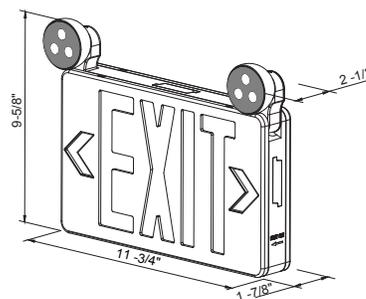

DESCRIPTION

The RXEL39-1 High Output Remote Capable Combo Exit/Emergency unit features two adjustable heads, single or double face high impact thermoplastic faceplates with snap-in & out chevrons. This exit sign uses an LED light source and has a backup battery. Ideal for applications requiring attractive, quick-installation exit signs and low energy consumption. Remote head capable.

DESIGN FEATURES

Construction

- Injection molded thermoplastic ABS housing with 5VA flame retardant
- Single or double face plate configuration
- Replaceable directional chevrons included
- Two fully adjustable round light heads
- Red or green lettering meets all NFPA code requirements

Electrical

- 120-277V AC Universal | 50/60 Hz
- 3.6V, 1800 mAh, rechargeable Ni-Mh HT battery X 2 units
- 2 Adjustable 1.2W LED heads | 280 lms total | 5500K CCT
- Maximum 3.6V 4W Remote Heads
- Ambient Operating Temperature: 10°C (50°F) to 40°C (104°F)
- 48 hour recharge after 90 minute discharge
- Manual test switch and LED indicator included on side of unit

Installation

- Suitable for wall, ceiling, or side mounting
- Housing snaps to canopy with simple and secure twist and lock

Dimensions

- 11-13/16" W x 1-13/16" D x 9-9/16" H

Remote Head Accessories (Sold Separately)

- Single Remote Heads
 - RH19, RH21, RH21-N
- Double Remote Heads
 - RH18, RH20, RH22

Certifications

- UL Listed for damp location to UL924 standards
- Meets and exceeds all appropriate NFPA life safety codes
- CEC Title 20 Compliant
- LED Light Source: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

ORDERING GUIDE

Example: RXEL39-1RW

| Model # | Finish |
|----------|---|
| RXEL39-1 | |
| RXEL39-1 | RW : Red with white housing- GW : Green with white housing |

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



RXEL39-1

120-277V AC

Spacing Diagram

