


# 8709-3CCT

120V

Catalog #:		Type
Project:		Date
Prepared by:		

## 4" LED Square Retrofit Downlight, 3 CCT Selectable

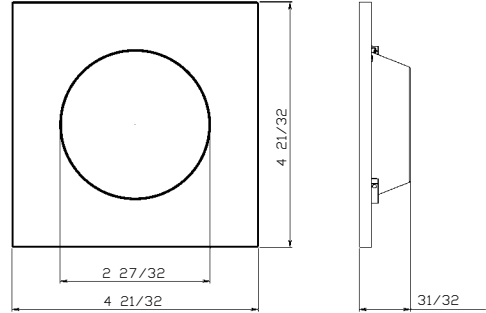

### DESCRIPTION

A slim profile, small aperture downlight that fits in a 4" octagonal j-box. Wet location listing, IC rating, and wide distribution makes this an excellent choice for simple illumination in hallway and bathroom applications.

### DESIGN FEATURES

#### Construction

- Durable aluminum construction
- Polycarbonate frosted lens


#### Electrical

- 120V-60Hz
- Dimmable TRIAC or ELV, 10-100%
- 50,000 hour projected life
- 90 CRI | 11W | 691 lms (delivered)
- 3CCT Selectable
- Beam Angle: 110°
- Operating temperature: 14°F - 104°F

#### Installation

- Simple and easy installation - light engine and trim connects via twist and lock
- Installs in 4" Octagonal ceiling j-box (min 2" depth);

j-box supplied by others



#### Dimensions

- 4-21/32" x 4-21/32" x 31/32"

#### Certifications

- cSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- IC Rated
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

### ORDERING GUIDE

Example: 8709WH-90-3CCT

Model #	Finish	CRI	CCT
8709	WH	-90	-3CCT
8709	WH : White	-90 : 90 CRI	-3CCT : Selectable 27K, 3K,35K

For Round Trim, refer to 8708 Specification Sheet

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.



LED Lamps Other Components

11/14/23 R1

LIGHTING • FANS

8709-3CCT - 4" LED Square Retrofit Downlight 3CCT Selectable