

4325D-2, 4326D-2, 4327D-2


120V

Catalog #:		Type
Project:		Date
Prepared by:		

12" / 14" / 16" Round Ceiling Mount - Plated Not Painted



Brushed Nickel

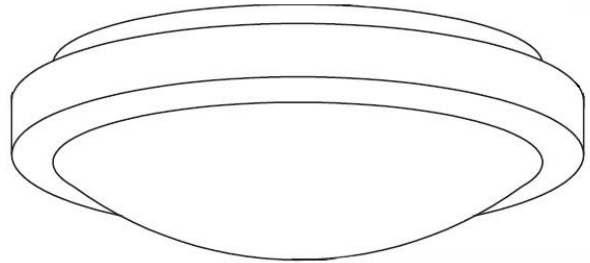

DESCRIPTION

This sleek, low-profile LED Flush Wall / Ceiling Mount fixture is an energy efficient LED light that comes complete with an integrated LED light engine. The lens design allows for light to reach the top of the walls in a small to medium-size room or hallway application.

DESIGN FEATURES

Construction

- Durable steel frame and heavy gauge backplate
- Frosted polycarbonate lens

Electrical

- 120V-60Hz
- Dimmable TRIAC or ELV, 10-100%
- 50,000 hour projected life
- 4325D-2-30: 15.1W | 1309 lms (source) | 982 lms (delivered)
- 4326D-2-30: 21.3W | 1684 lms (source) | 1263 lms (delivered)
- 4327D-2-30: 35W | 2185 lms (source) | 1639 lms (delivered)
- 3000K | 80 CRI

Lens

- Glass replacement: 4325L-1, 4326L-1, 4327L-1

Dimensions

- 4325D-2-30: 12-13/16" W x 3-13/16" H
- 4326D-2-30: 13-13/16" W x 3-13/16" H
- 4327D-2-30: 15-13/16" W x 4" H

Emergency (-EM) Option

- Emergency Battery Output = 9W
- Emergency Lumen Output = 9W x Fixture L/W

Certifications

- Energy Star Listed
- CSAus Listed for damp location
- LED Light Source: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

ORDERING GUIDE

Example: 4325D-2-30-BN-EM

Model #	Finish	Emergency
4325D-2-30 4326D-2-30 4327D-2-30	-BN : Brushed Nickel (Plated, not painted)	blank : no EM option -EM : Adds battery pack

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



LED Light Source

Other Components



LIGHTING • FANS

12" / 14" / 16" Round Ceiling Mount - Plated Not Painted

7/25/24 R1