



Summer 2026
Lighting Supplement





For over 30 years RP Lighting + Fans, formerly Royal Pacific, has been a valued supplier of lighting and fans to multiple markets throughout the United States and Canada. Established in 1990, RP specializes in the multi-family builder and showroom markets, and has rapidly grown to serve light commercial construction, mixed-use, and national account markets.

We are headquartered in McDonough, GA with a nationwide sales team. Electrical Distributors, contractors, and end-users are encouraged to contact us to find the nearest sales representative.

RP Lighting + Fans is committed to continuously expanding its catalog of energy efficient, high quality products that are priced right. Our products include ceiling fans (builder, mid-spec, designer), recessed and surface mount, exit and emergency, under-cabinet, vanity and other builder and light commercial categories.



Collection Overview

Disk & Under Cabinet Lighting



**Commercial
Recessed Downlight**
Pages 2-3



**Commercial
Slim Downlight**
Pages 4-5



**Commercial
Slim Recessed**
Page 6



**Edge-Lit Slim
Recessed**
Page 7



**Regressed Disk
Downlight**
Pages 8-9



Slim Disk Downlight
Pages 10-11



**Edge-Lit Slim
Surface Mount**
Pages 12-13



8966WH-8972WH
Page 14



8966WH-8972WH CCT
Page 15



5CCT Under Cabinet
Page 16



**Under Cabinet
Accessories**
Page 17



EM Battery Pack
Pages 18

Commercial Recessed Downlight



White Finish • Clear or Diffused Lens

Engineered for wet environments, this series delivers commercial code-compliant, high CRI output and three-color selection. Energy-efficient TRIAC dimming available in select sizes.



A. 8022CL-3W-4-3CCT



B. 8022CL-3W-6-3CCT



C. 8022CL-3W-8-3CCT



D. 8022WH-3W-4-3CCT



E. 8022WH-3W-6-3CCT



F. 8022WH-3W-8-3CCT



G. 8022WHD-3W-4-3CCT



H. 8022WHD-3W-6-3CCT



I. 8022WHD-3W-8-3CCT

ITEM	LOCATION	LED WATTS	DELIVERED LUMENS	CRI	DIMENSION	COLOR TEMPERATURE (K)	DIMMABLE	SPECIAL FEATURES
A. 8022CL-3W-4-3CCT	Wet	7W, 9W, 12W	1000	90	5.5"Dia. x 4.5"H	30K, 35K, 40K	0-10v	Multi CCT
B. 8022CL-3W-6-3CCT	Wet	12W, 16W, 20W	2000	90	7.5"Dia. x 4.5"H	30K, 35K, 40K	0-10v	Multi CCT
C. 8022CL-3W-8-3CCT	Wet	15W, 20W, 25W	2500	90	9.75"Dia. x 4.5"H	30K, 35K, 40K	0-10v	Multi CCT
D. 8022WH-3W-4-3CCT	Wet	7W, 9W, 12W	1100	90	5.5"Dia. x 4.5"H	30K, 35K, 40K	0-10v	Multi CCT
E. 8022WH-3W-6-3CCT	Wet	12W, 16W, 20W	2100	90	7.5"Dia. x 4.5"H	30K, 35K, 40K	0-10v	Multi CCT
F. 8022WH-3W-8-3CCT	Wet	15W, 20W, 25W	2700	90	9.75"Dia. x 4.5"H	30K, 35K, 40K	0-10v	Multi CCT
G. 8022WHD-3W-4-3CCT	Wet	7W, 9W, 12W	1100	90	5.5"Dia. x 4.5"H	30K, 35K, 40K	Triac 0-10v	Multi CCT
H. 8022WHD-3W-6-3CCT	Wet	12W, 16W, 20W	2100	90	7.5"Dia. x 4.5"H	30K, 35K, 40K	Triac 0-10v	Multi CCT
I. 8022WHD-3W-8-3CCT	Wet	15W, 20W, 25W	2700	90	9.75"Dia. x 4.5"H	30K, 35K, 40K	Triac 0-10v	Multi CCT

CL: Clear Lens | WH/WHD: Diffused Lens

Commercial Slim Downlight



White Finish • Diffused Lens

Crafted to deliver long life illumination, these wet-rated, code-compliant downlights offer five-color selection. Energy-efficient TRIAC dimming available in select sizes.



A. 8522WH-3W-4-5CCT



B. 8522WH-3W-6-5CCT



C. 8522WH-3W-8-5CCT



E. 8522WHD-3W-4-5CCT



F. 8522WHD-3W-6-5CCT



G. 8522WHD-3W-8-5CCT

ITEM	LOCATION	LED WATTS	DELIVERED LUMENS	CRI	DIMENSION	COLOR TEMPERATURE (K)	DIMMABLE	SPECIAL FEATURES
A. 8522WH-3W-4-5CCT	Wet	8W, 10W, 12W	1100	90	5.5"Dia. x 2.25"H	27K, 30K, 35K, 40K, 50K	0-10v	Multi CCT
B. 8522WH-3W-6-5CCT	Wet	12W, 15W, 18W	1800	90	7.5"Dia. x 2.25"H	27K, 30K, 35K, 40K, 50K	0-10v	Multi CCT
C. 8522WH-3W-8-5CCT	Wet	15W, 20W, 25W	2800	90	9.5"Dia. x 2.25"H	27K, 30K, 35K, 40K, 50K	0-10v	Multi CCT
D. 8522WHD-3W-4-5CCT	Wet	8W, 10W, 12W	1100	90	5.5"Dia. x 2.25"H	27K, 30K, 35K, 40K, 50K	0-10v	Multi CCT
E. 8522WHD-3W-6-5CCT	Wet	12W, 15W, 18W	1800	90	7.5"Dia. x 2.25"H	27K, 30K, 35K, 40K, 50K	0-10v	Multi CCT
F. 8522WHD-3W-8-5CCT	Wet	15W, 20W, 25W	2800	90	9.5"Dia. x 2.25"H	27K, 30K, 35K, 40K, 50K	0-10v	Multi CCT

Commercial Slim Recessed



White Finish • Diffused Lens

Engineered for commercial grade installations and wet rated, this series features a slim 2.5 inch depth, five color selection, and a high CRI. Energy efficient TRIAC dimming is available in select sizes.



A. 8524WH-3W-4-5CCT



B. 8524WH-3W-6-5CCT



C. 8524WH-3W-8-5CCT

ITEM	LOCATION	LED WATTS	DELIVERED LUMENS	CRI	DIMENSION	COLOR TEMPERATURE (K)	DIMMABLE	SPECIAL FEATURES
A. 8524WH-3W-4-5CCT	Wet	8W, 10W, 12W	1100	90	5.5" Dia. x 2.5"H	27K, 30K, 35K, 40K, 50K	0-10v	Low Profile, Multi CCT
B. 8524WH-3W-6-5CCT	Wet	12W, 15W, 18W	1700	90	7.5" Dia. x 2.5"H	27K, 30K, 35K, 40K, 50K	0-10v	Low Profile, Multi CCT
C. 8524WH-3W-8-5CCT	Wet	15W, 20W, 25W	2500	90	9.5" Dia. x 2.5"H	27K, 30K, 35K, 40K, 50K	0-10v	Low Profile, Multi CCT

Edge-Lit Slim Recessed



White Finish • Diffused Lens

Designed for shallow plenums and installations, these wet-rated lights feature a fixed 3000K color light and serves spaces where canned recessed fixtures are not suited.



A. 8540WH-4-3K



B. 8540WH-6-3K

ITEM	LOCATION	LED WATTS	DELIVERED LUMENS	CRI	DIMENSION	COLOR TEMPERATURE (K)	DIMMABLE	SPECIAL FEATURES
A. 8540WH-4-3K	Wet	9W	600	90	4.75"Dia. x 1"H	30K	Triac/ELV	Edgelit, Low-Plenum
B. 8540WH-6-3K	Wet	14W	1000	90	6.75"Dia. x 1"H	30K	Triac/ELV	Edgelit, Low-Plenum

Regressed Disk Downlight



White Finish • Diffused Lens

With a refined grooved trim and low profile wet rated construction, this downlight delivers long life, high CRI commercial-code illumination, offered in either fixed 3000K or five-color selection.



A. 8530WH-13-3K



B. 8530WH-13-5CCT



C. 8530WH-4-3K



D. 8530WH-4-5CCT



E. 8530WH-6-3K



F. 8530WH-6-5CCT



G. 8530WH-9-3K



H. 8530WH-9-5CCT

ITEM	LOCATION	LED WATTS	DELIVERED LUMENS	CRI	DIMENSION	COLOR TEMPERATURE (K)	DIMMABLE	SPECIAL FEATURES
A. 8530WH-13-3K	Wet	24W	1800	90	13"Dia. x 1.75"H	30K	Triac/ELV	Grooved Trim, Regress
B. 8530WH-13-5CCT	Wet	24W	1800	90	13"Dia. x 1.75"H	27K, 30K, 35K, 40K, 50K	Triac/ELV	Multi CCT, Grooved trim, Regress
C. 8530WH-4-3K	Wet	8W	700	90	6.25"Dia. x 1"H	30K	Triac/ELV	Grooved Trim, Regress
D. 8530WH-4-5CCT	Wet	8W	700	90	6.25"Dia. x 1"H	27K, 30K, 35K, 40K, 50K	Triac/ELV	Multi CCT, Grooved Trim, Regress
E. 8530WH-6-3K	Wet	14W	1200	90	7.5"Dia. x 1.25"H	30K	Triac/ELV	High Lumens, Grooved Trim, Regress
F. 8530WH-6-5CCT	Wet	14W	1200	90	7.5"Dia. x 1.25"H	27K, 30K, 35K, 40K, 50K	Triac/ELV	Multi CCT, High Lumens, Grooved Trim, Regress
G. 8530WH-9-3K	Wet	17W	1300	90	9"Dia. x 1.5"H	30K	Triac/ELV	Grooved Trim, Regress
H. 8530WH-9-5CCT	Wet	17W	1300	90	9"Dia. x 1.5"H	27K, 30K, 35K, 40K, 50K	Triac/ELV	Multi CCT, Grooved Trim, Regress

Slim Disk Downlight



White Finish • Diffused Lens

With a low profile wet rated design, this downlight delivers high CRI, low glare illumination for modern residential and commercial spaces, offered with 3000K or five-color selection in some sizes.



A. 8531WH-S-6-5CCT



B. 8531WH-SP-6-5CCT



C. 8531WH-6-3K




D. 8531WH-6-5CCT




E. 8531WH-4-3K



F. 8531WH-4-5CCT

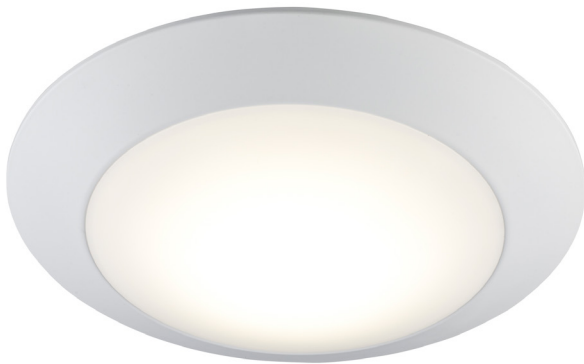

G. 8531WH-9-3K

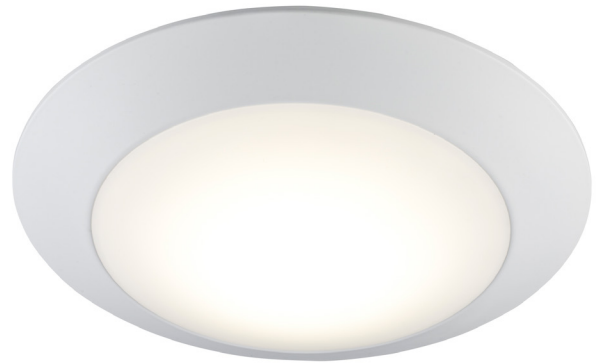

H. 8531WH-9-5CCT

ITEM	LOCATION	LED WATTS	DELIVERED LUMENS	CRI	DIMENSION	COLOR TEMPERATURE (K)	DIMMABLE	SPECIAL FEATURES
A. 8531WH-S-6-5CCT	Wet	14W	1000	90	7.5"Dia. x 1.5"H	27K, 30K, 35K, 40K, 50K	N/A	Multi CCT, PIR Motion Sensor, Low-Profile, Smooth Trim
B. 8531WH-SP-6-5CCT	Wet	14W	1000	90	7.5"Dia. x 1.5"H	27K, 30K, 35K, 40K, 50K	N/A	Multi CCT, PIR Motion Sensor with Photocell, Low-Profile, Smooth Trim
C. 8531WH-6-3K	Wet	11W	1000	90	7.5"Dia. x 1"H	30K	N/A	Low-Profile, Smooth Trim
D. 8531WH-6-5CCT	Wet	11W	1000	90	7.5"Dia. x 1"H	27K, 30K, 35K, 40K, 50K	N/A	Multi CCT, Low-Profile, Smooth Trim
E. 8531WH-4-3K	Wet	8W	700	90	6"Dia. x 1"H	30K	N/A	Low-Profile, Smooth Trim
F. 8531WH-4-5CCT	Wet	8W	700	90	6"Dia. x 1"H	27K, 30K, 35K, 40K, 50K	N/A	Multi CCT, Low-Profile, Smooth Trim
G. 8531WH-9-3K	Wet	17W	1300	90	9.5"Dia. x 1.75"H	30K	N/A	Low-Profile, Smooth Trim
H. 8531WH-9-5CCT	Wet	17W	1300	90	9.5"Dia. x 1.75"H	27K, 30K, 35K, 40K, 50K	N/A	Multi CCT, Low-Profile, Smooth Trim

Edge-Lit Slim Surface Mount



White Finish • Diffused Lens

With a 0.75 inch profile, this series installs easily in narrow plenums, delivering bright illumination with a 3000K or five color selection and a damp or wet rating in select sizes.




A. 8532WH-11-3K



B. 8532WH-11-5CCT



C. 8532WH-15-3K

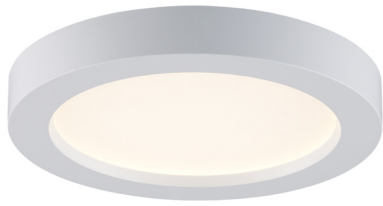

D. 8532WH-5-3K



E. 8532WH-5-5CCT



F. 8532WH-7-3K



G. 8532WH-7-3K-EM



H. 8532WH-7-5CCT



I. 8532WH-7-5CCT-EM

ITEM	LOCATION	LED WATTS	DELIVERED LUMENS	CRI	DIMENSION	COLOR TEMPERATURE (K)	DIMMABLE	SPECIAL FEATURES
A. 8532WH-11-3K	Damp	18W	1400	90	11"Dia. x .75"H	30K	Triac/ELV	Edgelit Slim
B. 8532WH-11-5CCT	Damp	26W	1500	90	11.25"Dia. x .75"H	27K, 30K, 35K, 40K, 50K	Triac/ELV	Multi CCT, Edgelit Slim
C. 8532WH-15-3K	Damp	32W	2400	90	16"Dia. x .75"H	30K	Triac/ELV	Edgelit Slim
D. 8532WH-5-3K	Wet	11W	700	90	5.5"Dia. x .75"H	30K	Triac/ELV	Edgelit Slim
E. 8532WH-5-5CCT	Wet	12W	700	90	5.75"Dia. x .75"H	27K, 30K, 35K, 40K, 50K	Triac/ELV	Multi CCT, Edgelit Slim
F. 8532WH-7-3K	Wet	16W	1000	90	7"Dia. x .75"H	30K	Triac/ELV	Edgelit Slim
G. 8532WH-7-3K-EM	Damp	17W	1000	90	7"Dia. x 1.75"H	30K	Triac/ELV	Edgelit Slim, Integrated Reliable Emergency Backup
H. 8532WH-7-5CCT	Wet	16W	1000	90	7.25"Dia. x .75"H	27K, 30K, 35K, 40K, 50K	Triac/ELV	Multi CCT
I. 8532WH-7-5CCT-EM	Damp	17W	1000	90	7"Dia. x 1.75"H	27K, 30K, 35K, 40K, 50K	Triac/ELV	Edgelit Slim, Integrated Reliable Emergency Backup

8966WH-8972WH



White Finish • Diffused Lens

The energy efficient, easy to install, and linkable under cabinet fixtures are suitable for residential and commercial areas, including damp locations.



Available in 7 Sizes:
9", 12", 18", 21", 24", 36", 48"

ITEM	LOCATION	LED WATTS	DELIVERED LUMENS	CRI	DIMENSION	COLOR TEMPERATURE (K)	DIMMABLE	SPECIAL FEATURES
8966WH	Damp	4W	200	90	9"L x 3.75"W x 1"H	30K	Triac 0-10v	Quick Connect
8967WH	Damp	5W	270	90	12"L x 3.75"W x 1"H	30K	Triac 0-10v	Quick Connect
8968WH	Damp	7W	420	90	18"L x 3.75"W x 1"H	30K	Triac 0-10v	Quick Connect
8969WH	Damp	8W	460	90	21"L x 3.75"W x 1"H	30K	Triac 0-10v	Quick Connect
8970WH	Damp	9W	580	90	24"L x 3.75"W x 1"H	30K	Triac 0-10v	Quick Connect
8971WH	Damp	13W	800	90	36"L x 3.75"W x 1"H	30K	Triac 0-10v	Quick Connect
8972WH	Damp	17W	1070	90	48"L x 3.75"W x 1"H	30K	Triac 0-10v	Quick Connect

8966WH-8972WH CCT



White Finish • Diffused Lens

The easy to install design is energy efficient and offers five-color selection, suited for residential and commercial use in damp conditions.



Available in 7 Sizes:
9", 12", 18", 21", 24", 36", 48"

ITEM	LOCATION	LED WATTS	DELIVERED LUMENS	CRI	DIMENSION	COLOR TEMPERATURE (K)	DIMMABLE	SPECIAL FEATURES
8966WH-2734	Damp	4W	250	90	9"L x 3.75"W x 1.25"H	27K, 30K, 40K	Triac 0-10v	Multi CCT
8967WH-5CCT	Damp	5W	315	90	12"L x 3.75"W x 1"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT
8968WH-5CCT	Damp	7W	500	90	18"L x 3.75"W x 1"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT
8969WH-5CCT	Damp	8W	595	90	21"L x 3.75"W x 1"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT
8970WH-5CCT	Damp	9W	670	90	24"L x 3.75"W x 1"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT
8971WH-5CCT	Damp	13W	900	90	36"L x 3.75"W x 1"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT
8972WH-5CCT	Damp	17W	1190	90	48"L x 3.75"W x 1"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT

5CCT Under Cabinet



White Finish • Diffused Lens

Designed for versatility and performance; this series delivers energy efficient illumination in residential and commercial damp locations and features five color selection.



Available in 7 Sizes:
9", 12", 18", 24", 33", 40", 46"

ITEM	LOCATION	LED WATTS	DELIVERED LUMENS	CRI	DIMENSION	COLOR TEMPERATURE (K)	DIMMABLE	SPECIAL FEATURES
8973WH-5CCT	Damp	4W	280	90	9"L x 3.5"W x 1.4"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT
8974WH-5CCT	Damp	5W	350	90	12"L x 3.5"W x 1.4"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT
8975WH-5CCT	Damp	10W	700	90	18"L x 3.5"W x 1.4"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT
8976WH-5CCT	Damp	12W	840	90	24"L x 3.5"W x 1.4"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT
8977WH-5CCT	Damp	16W	1120	90	33"L x 3.5"W x 1.4"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT
8978WH-5CCT	Damp	20W	1400	90	40"L x 3.5"W x 1.4"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT
8979WH-5CCT	Damp	20W	1400	90	46"L x 3.5"W x 1.4"H	27K, 30K, 35K, 40K, 50K	Triac 0-10v	Multi CCT

Under Cabinet Accessories

White



A. 897CN



B. 897CN-6



C. 897CN-12



D. 897CN-24


ITEM	DESCRIPTION
A. 897CN	End to end Connector 8966-8972
B. 897CN-6	6in connector cord 8966-8972 Under cabs
C. 897CN-12	12in connector cord 8966-8972 Under cabs
D. 897PC-24	24in power cord 8966-8972 Under cabs

EM Battery Pack




Red Finish

Designed to instantly activate during outages, this damp-rated emergency light battery pairs high output performance with a standardized quick interface connection across compatible fixtures.

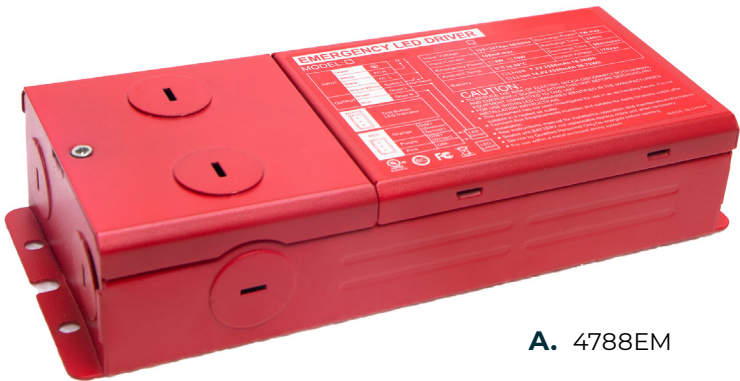

A. 4788EM

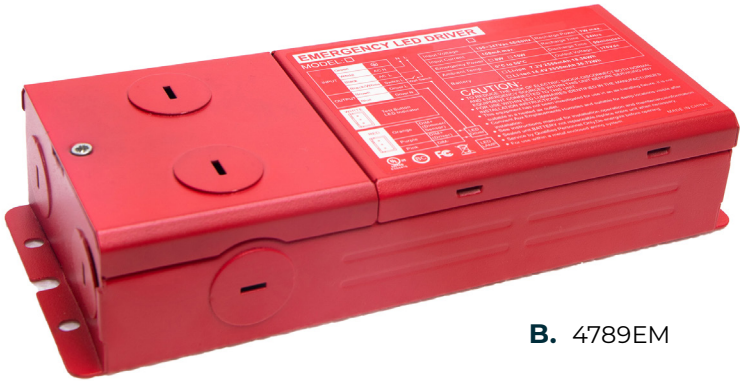

B. 4789EM

ITEM	LOCATION	WATTS	DIMENSION	SPECIAL FEATURES
A. 4788EM	Damp	8W	8"L x 3.25"W x 1.75"H	Standardized EM quick interface
B. 4789EM	Damp	15W	8"L x 3.25"W x 1.75"H	Standardized EM quick interface

Index

897CN.....	17	8532WH-7-3K.....	13
897CN-6.....	17	8532WH-7-3K-EM.....	13
897CN-12.....	17	8532WH-7-5CCT.....	13
897PC-24.....	17	8532WH-7-5CCT-EM.....	13
4788EM.....	18	8532WH-11-3K.....	13
4789EM.....	18	8532WH-11-5CCT.....	13
8022CL-3W-4-3CCT.....	3	8532WH-15-3K.....	13
8022CL-3W-6-3CCT.....	3	8540WH-4-3K.....	7
8022CL-3W-8-3CCT.....	3	8540WH-6-3K.....	7
8022WH-3W-4-3CCT.....	3	8966WH.....	14
8022WH-3W-6-3CCT.....	3	8966WH-2734.....	15
8022WH-3W-8-3CCT.....	3	8967WH.....	14
8022WHD-3W-4-3CCT.....	3	8967WH-5CCT.....	15
8022WHD-3W-6-3CCT.....	3	8968WH.....	14
8022WHD-3W-8-3CCT.....	3	8968WH-5CCT.....	15
8522WH-3W-4-5CCT.....	5	8969WH.....	14
8522WH-3W-6-5CCT.....	5	8969WH-5CCT.....	15
8522WH-3W-8-5CCT.....	5	8970WH.....	14
8522WHD-3W-4-5CCT.....	5	8970WH-5CCT.....	15
8522WHD-3W-6-5CCT.....	5	8971WH.....	14
8522WHD-3W-8-5CCT.....	5	8971WH-5CCT.....	15
8524WH-3W-4-5CCT.....	6	8972WH.....	14
8524WH-3W-6-5CCT.....	6	8972WH-5CCT.....	15
8524WH-3W-8-5CCT.....	6	8973WH-5CCT.....	16
8530WH-4-3K.....	9	8974WH-5CCT.....	16
8530WH-4-5CCT.....	9	8975WH-5CCT.....	16
8530WH-6-3K.....	9	8976WH-5CCT.....	16
8530WH-6-5CCT.....	9	8977WH-5CCT.....	16
8530WH-9-3K.....	9	8978WH-5CCT.....	16
8530WH-9-5CCT.....	9	8979WH-5CCT.....	16
8530WH-13-3K.....	9		
8530WH-13-5CCT.....	9		
8531WH-4-3K.....	11		
8531WH-4-5CCT.....	11		
8531WH-6-3K.....	11		
8531WH-6-5CCT.....	11		
8531WH-9-3K.....	11		
8531WH-9-5CCT.....	11		
8531WH-S-6-5CCT.....	11		
8531WH-SP-6-5CCT.....	11		
8532WH-5-3K.....	13		
8532WH-5-5CCT.....	13		



105 Declaration Dr, McDonough, GA 30253 | (678) 432-6190
rplighting.com