


# 1049-E26-L

120V

Catalog #:		Type
Project:		Date
Prepared by:		

## Contempo II - 3-Blade, 44" Sweep, E26 LED Light Kit Included

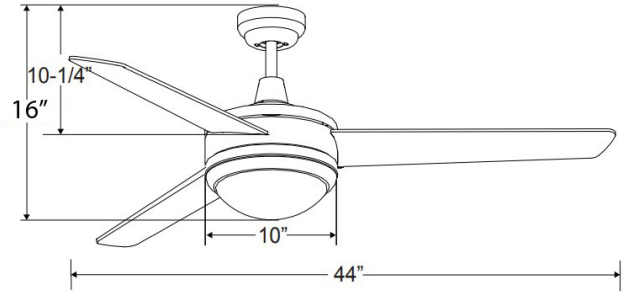

### DESCRIPTION

The clean lines and modern design of the Contempo II Series add style to any contemporary space. The economical E26 LED light kit provides long lasting energy savings.

### DESIGN FEATURES

#### Motor

- 3-Speed | Reversible
- AC Motor | 153 x 15 mm | 3 capacitors
- RPM: High: 264 Low: 147
- High: CFM: 4361 | Watts: 47.71 | Efficiency: 91.4
- Low: CFM: 2499 | Watts: 18.23
- 76" Lead wire | 4" down rod included

#### Blades

- 3-Blade, 44" sweep
- Blade Construction: Plywood<sup>1</sup>
- 12° pitch

#### Light Kit

- E26 light kit included
- 2 x 9W A19 LED | Dimmable | 3000K | lamps included, 900 lms (delivered)
- Shade: Satin white glass
- Replacement glass: 1079-G-LED-E26

#### Dimensions

16"	10"	10-1/4"
Height (lowest point)	Width (housing)	Height (top of blade)

#### Controls:

- Pull Chain Standard
- Optional Remote Control (sold separately) RC-10
- Optional Wall Control (sold separately) WC-4, WC-8, WC-13 and WC-16

#### Certifications

- cETLus listed for dry location
- Fan Motor: Limited Lifetime Warranty
- Light Kit: 1 Year Limited Warranty
- Non-Electrical: 1 Year Limited Warranty

### ORDERING GUIDE

Example: 1049BN-BN-E26-L

Model #	Finish	Socket Base	Light Kit
1049		-E26	-L
1049	<b>BN-BN</b> : Brushed Nickel / Brushed Nickel <b>OB-OB</b> : Oil Rubbed Bronze / Oil Rubbed Bronze <b>BK-BK</b> : Black / Black <b>WW-WW</b> : White / White	-E26: socket base	-L: E26 LED lamps included

<sup>1</sup>To avoid fan blade warping, fan must be installed in climate controlled environment

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.



Light Kit,  
Non-Electrical,  
Lamps

11/7/23 R3



RP | LIGHTING • FANS

1049-E26-L - 3-Blade, 44" Sweep, Light Kit Included