


8742-5CCT

120V

Catalog #:		Type
Project:		Date
Prepared by:		

4" LED Ultra-Thin Downlight, 5CCT Selectable

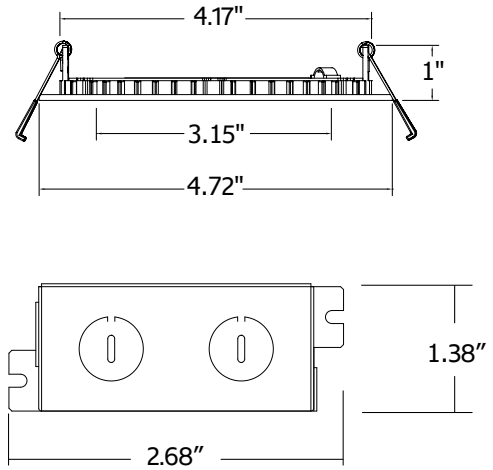

DESCRIPTION

A versatile LED down light solution with edge-lit technology and an off-board driver allow for an ultra slim profile and flexible mounting options. Installation is a snap with the plenum-rated driver box and linkable connector cable — there is no need for a j-box or recessed housing. The simple spring-loaded retention tabs securely hold each downlight snug to the ceiling.

DESIGN FEATURES

Construction

- Ultra-thin profile
- Durable aluminum construction
- Frosted acrylic lens diffuses glare and maximizes output

Electrical

- 120V-60Hz, AC
- Dimmable TRIAC or ELV, 10-100%
- 50,000 hour projected life
- 120° Beam Angle
- Nominal 9W | 670 lms delivered
- 90CRI | 5CCT Selectable: 27K, 3K, 35K, 4K, 5K

Installation

- Spring-loaded retention tabs hold downlight snug to ceiling surface, off-board driver/ junction box, poke-in connectors, and linkable connector cable
- IC Rated for direct contact with batt type fiberglass insulation

Accessory Mounting Plate Assembly

- PF-4

Certifications

- cETLus listed for damp location
- IC Rated | Air Tight Rated
- LED Light Source: 5 year limited warranty
- Other Components: 1 year limited warranty



ORDERING GUIDE

Example: 8742WH-90-5CCT

Model #	Finish - CRI	CCT
8742-2	WH-90	
8742-2	WH : White -90 : 90 CRI	-5CCT Selectable 27K, 3K, 35K, 4K, 5K
Accessory		
PF-4	: Mounting Plate	

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

IC
RATED



LED Light
Source

Other
Components



RP LIGHTING • FANS

11/11/22

8742-5CCT

120V

Mounting Plate Assembly Information

Accessory Mounting Plate Assembly

- **PF-4**
- Includes four 12" bar hanger to allow for easy adjustment and easy installation
- Durable aluminum construction
- Perfect for installing recessed lighting into new construction



New Construction Mounting Plate Assembly:

1. Align hanger bar brackets with mounting holes on the new construction mounting plate and secure in place with mounting screws (Fig. 1).
NOTE: Hanger bars can be installed on long or short side of the new construction mounting plate.
2. Insert both female and male parts of the hanger bars into the bracket from opposite ends (Fig. 2). Make sure that the male part is inserted within the female part and that the end tab is facing downwards.

