


4787-EM

120V

Catalog #:		Type
Project:		Date
Prepared by:		

Emergency Battery Backup for 442X Outdoor LED Cylinder

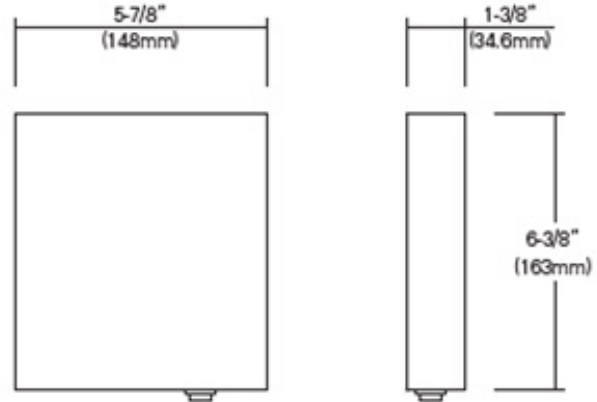

DESCRIPTION

EM battery back-up for use with the RP Lighting's 442X Outdoor LED cylinder family, wet location rated wall mount style cylinders with down light and up & down light options. Choose from black or oil-rubbed bronze finish. This maintenance-free emergency battery back-up unit with rechargeable Ni-MH battery allows for emergency power in exterior applications. With the blank empty filler unit, you can now have a similar appearance when using the emergency unit.

DESIGN FEATURES

Construction

- Durable metallic structure and waterproof application

Electrical

- 120V - 60Hz
- Non-Switch Loads Only (Always On Applications)
- Battery - 11.1V / 2.6Ah Ni-MH Re-chargeable; up to 24 hours charge time
- Emergency Output - 20% of nominal power
- Provides over 120 minutes when normal power fails
- LED Indications
 - Red - Charging
 - Green - Fully Charged
 - Yellow - Faulty
- Operating Temperature - 0oC (32°F) to +55°C (+131°F)
- Test Switch / Charging Indicator Light: 4W-ITS (4-wire illuminated test switch) included on 4787EM
- 9W output when in EM mode
- 72lm/W

Warranty

- 4787-EM: 1 Year Limited Warranty
- 4787-F: 1 Year Limited Warranty

Installation

- For use with 4 42X Outdoor LED cylinders
- One-piece emergency battery back-up unit allowing to junction box mounting

